

**SUMMARY TEST DATA  
ON  
P2T-2G4G-75-T-SFF-PN**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P2T-2G4G-75-T-SFF-PN  
 Serial No: 34169  
 Part No: \_\_\_\_\_

Tested By: Tin M. L  
 Temperature: 25°C  
 Date: 4/25/2023  
 Drawing No: 27616801      Rev: A1




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	2 GHz to 4 GHz	2 GHz to 4 GHz	PMI QA2	
2	Insertion Loss	1.2 dB Max.	1.05 dB		
3	Isolation	75 dB Min.	97.2 dB		
4	VSWR: In/Out	1.6 dB Max.	1.44:1 In 1.42:1 Out		
5	Switching Speed	100 ns Max.	Pass See Typical Characteristics		
6	Operating Power	1 Watts CW Max	Pass See Typical Characteristics		
7	Power Supply	5 V @ 80 mA Nom. -15 V @ 50 mA Nom.	5 V @ 30 mA -15 V @ 60 mA		PMI QA2

QA/QC Approval:       PMI  
QA2

Date: 4/27/2023

SUMMARY TEST DATA  
ON  
P2T-2G4G-75-T-SFF-PN

34169

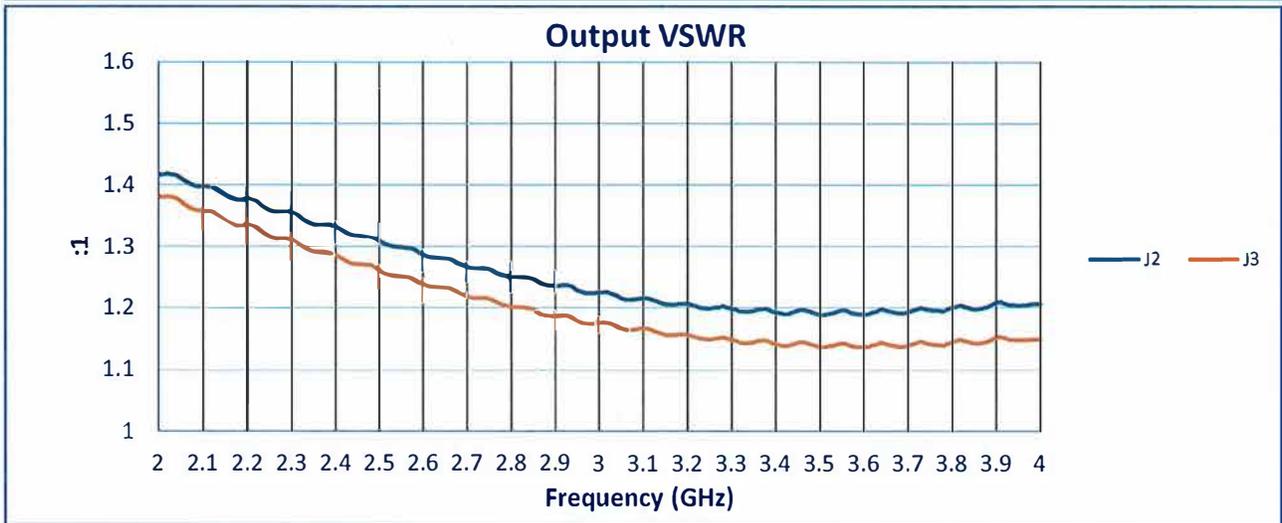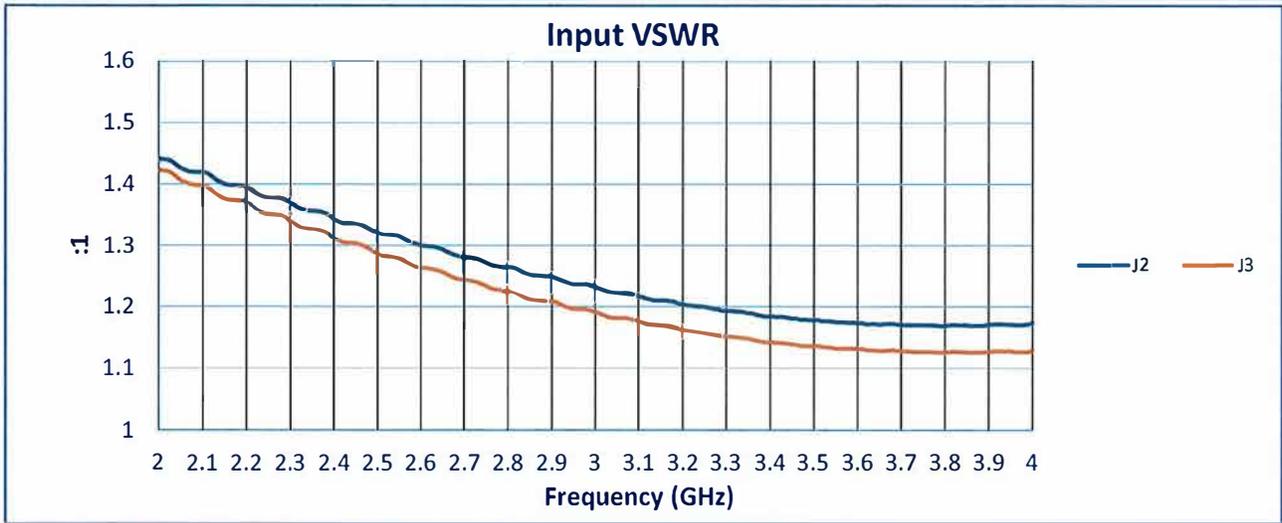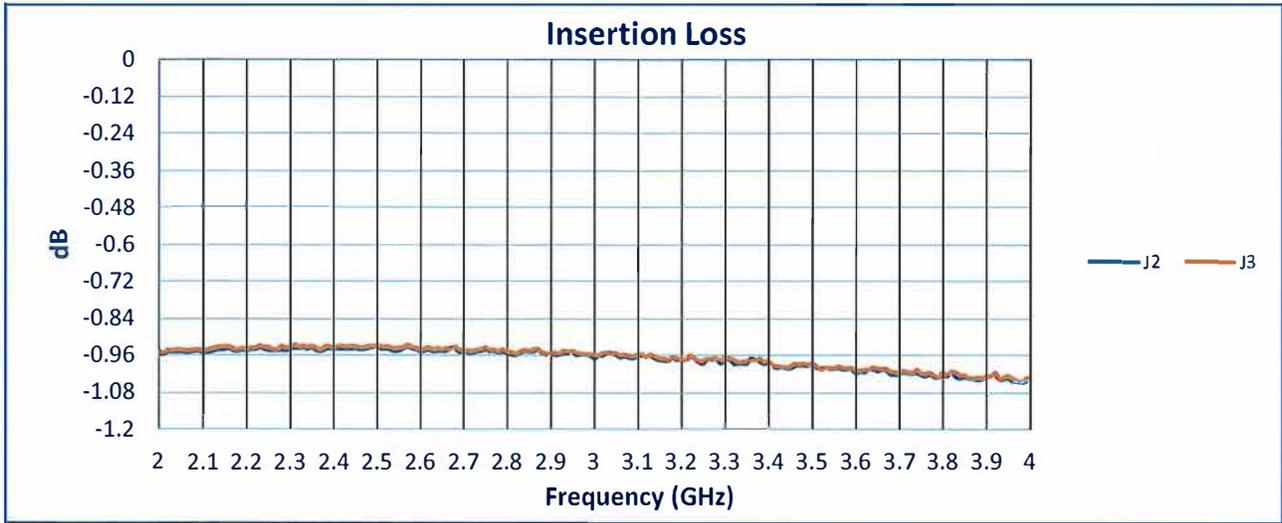

SUMMARY TEST DATA  
ON  
P2T-2G4G-75-T-SFF-PN

34169

