

**SUMMARY TEST DATA  
ON  
APD-2-800M2D5G-NFF-50W**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: \_\_\_\_\_  
 Serial No: 34182



Tested By: K Craven  
 Temperature: +25°C  
 Date: 6/20/2023  
 Drawing No: 27627902      Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	0.8 to 2.5 GHz	0.8 to 2.5 GHz	PMI QA2	
2	Insertion Loss:	≤0.4 dB	0.27 dB See Plot		
3	VSWR:	≤1.25:1	1.12:1 1.07:1 See Plot		
4	Isolation:	22 dB Min.	28 dB See Plot		
5	Amplitude Balance:	≤±0.2 dB	0.02 dB See Plot		
6	Phase Balance:	≤±2°	0.5° See Plot		
7	Power Handling:	Forward ≤50 W Reversed ≤1 W	See Typical Characteristics		
8	Impedance:	50 Ω	See Typical Characteristics		PMI QA2

QA/QC Approval:       PMI  
QA2

Date: 6/21/2023

**SUMMARY TEST DATA  
ON  
APD-2-800M2D5G-NFF-50W**

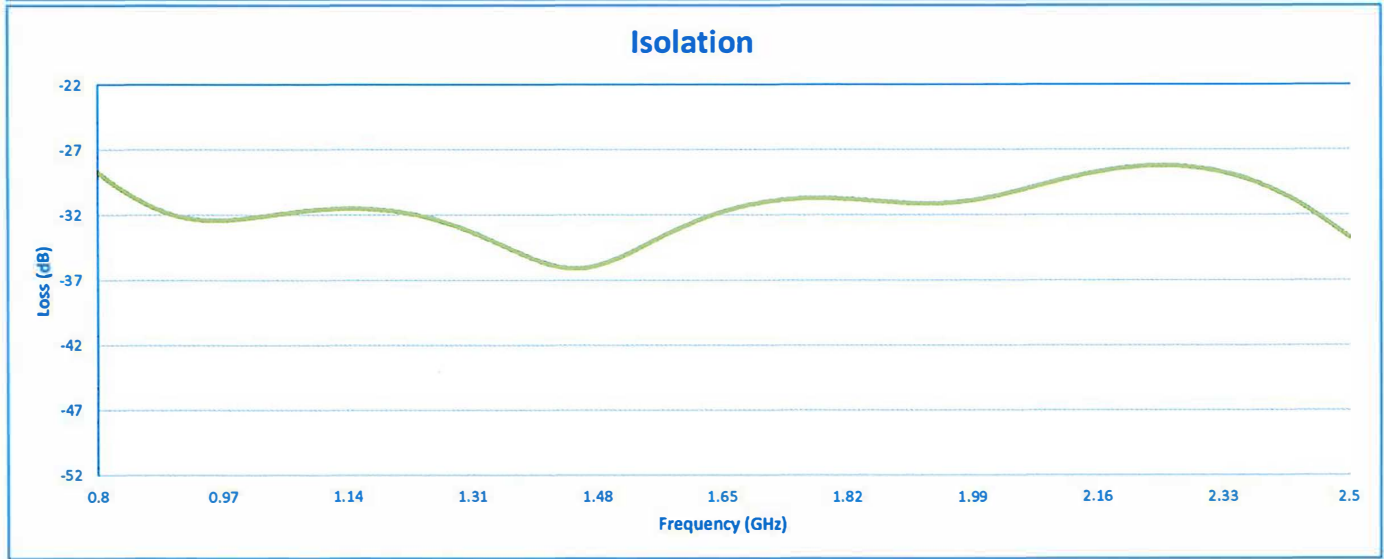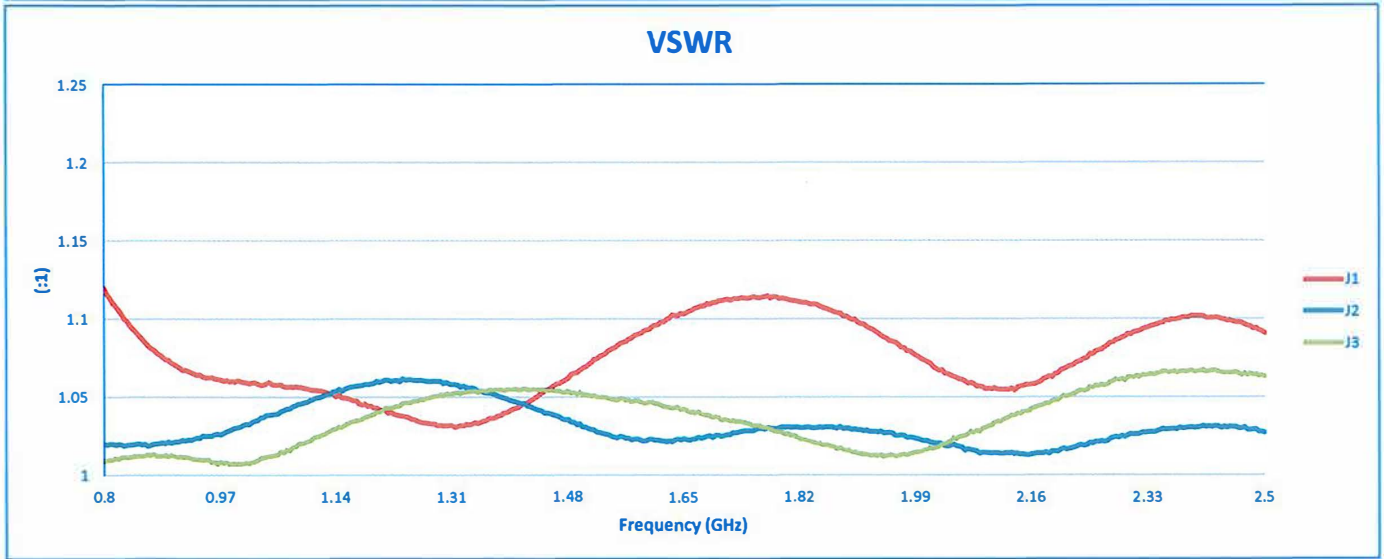

**SUMMARY TEST DATA**  
**ON**  
**APD-2-800M2D5G-NFF-50W**

34182

