

**SUMMARY TEST DATA
ON
P2T-500M18G-USB**

Customer: _____
SO No: _____
Model No: P2T-500M18G-USB
Serial No: 44398
Part No: _____

Tested By: K. Mansfield
Temperature: 25 Degrees C
Date: 4/22/2024
Drawing No: 27622530 Rev: A1

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.5 to 18 GHz	0.5 to 18 GHz	PMI QA4
2	Isolation:	60 dB Min.	65.9 dB See Plot	
3	Insertion Loss:	6.0 dB Max.	3.18 dB See Plot	
4	VSWR In/Out:	2.5:1 Typ.	2.37:1 In/Out 2.13:1 Out/Off See Plot	
5	Input Power:	+20 dBm CW Max.	+20 dBm See Typical Characteristics	
6	Power Connector:	USB Type A Plug	Pass	PMI QA4

QA/QC Approval:

Cameron Kelley


PMI
QA4

Date: 04/22/2024


SUMMARY TEST DATA ON P2T-500M18G-USB

44398

Insertion Loss

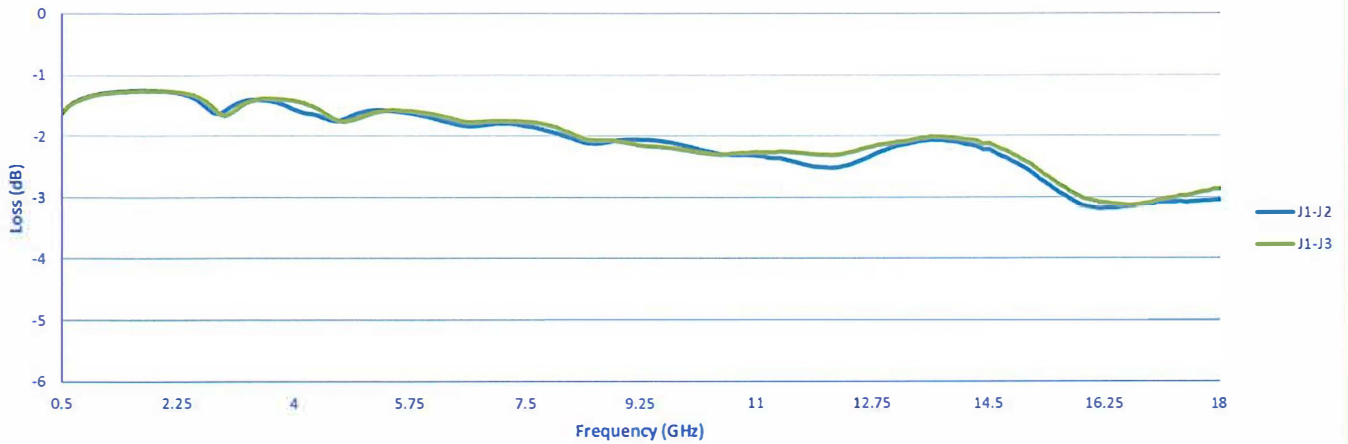

VSWR

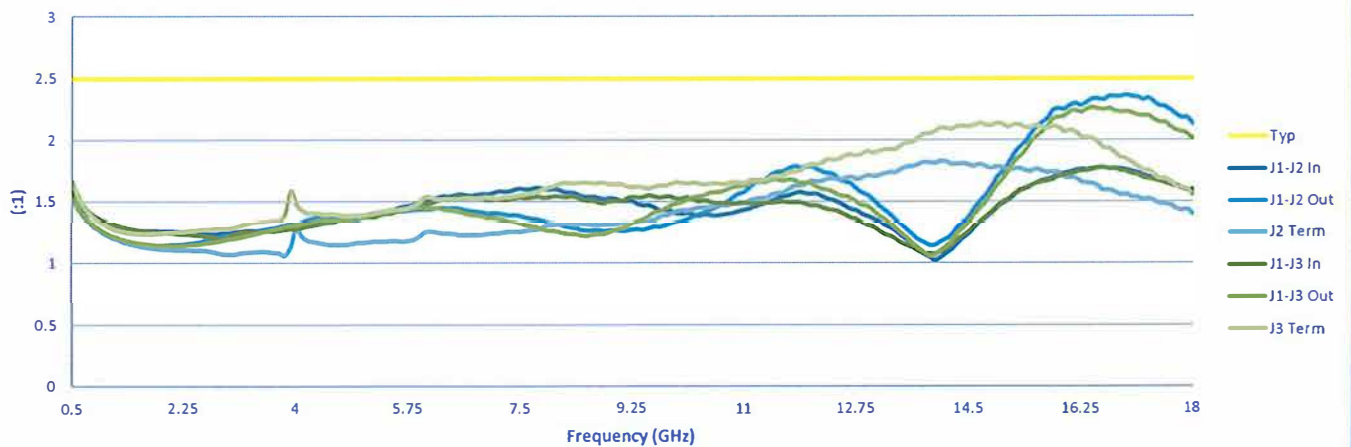

Isolation

