

**SUMMARY TEST DATA
ON
P1T-10M1G-80-T-SFF**

44467

Customer: _____ Tested By: K Craven
 SO No: _____ Temperature: +25°C
 Model No: P1T-10M1G-80-T-SFF Date: 8/19/24
 Serial No: 44467 Drawing No: 27626282 Rev: A1
 Part No: _____


TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	0.01 TO 1.0 GHz	0.01 TO 1.0 GHz	PMI QA4
2	Insertion Loss	1.3 dB Max	1.22 dB (See Plot)	
3	VSWR	1.5:1 Typ	1.5:1 (See Plot)	
4	Isolation	80 dB Typ	91 dB (See Plot)	
5	Switching Speed	200 ns Max.	See Typical Characteristics	
6	Input Power	+30dBm Max (Survival) +20dBm Max (Operating)	Pass	
7	DC Supply	+5VDC @ 20 mA Typ -15VDC @ 40 mA Typ	40 mA 70 mA	
8	Control Signal	TTL "0" → (Insertion Loss) TTL "1" → (Isolation)	Pass / Fail	PMI QA4

QA/QC Approval: *Cameron Kelley* Date: 8/23/24

SUMMARY TEST DATA ON P1T-10M1G-80-T-SFF

44467

(J1 - J2) Insertion Loss and Return Loss

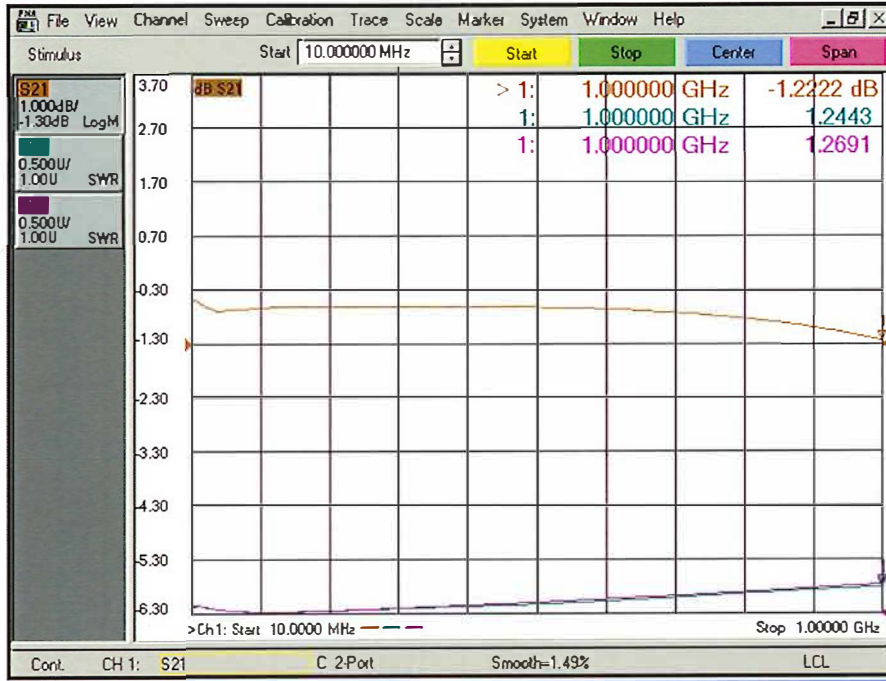

(J1 - J2) Isolation and Termination Return Loss

