

SUMMARY TEST DATA ON P2T-500M18G-USB

Customer: _____
 SO No: _____
 Model No: P2T-500M18G-USB
 Serial No: 44470
 Part No: _____

Tested By: K. Mansfield
 Temperature: 25 Degrees C
 Date: 8/26/2024
 Drawing No: 27622530 Rev: A1

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.5 to 18 GHz	0.5 to 18 GHz	PMI QA2
2	Isolation:	60 dB Min.	66.8 dB See Plot	
3	Insertion Loss:	6.0 dB Max.	2.69 dB See Plot	
4	VSWR In/Out:	2.5:1 Typ.	2.04:1 In/Out 1.78:1 Out/Off See Plot	
5	Input Power:	+20 dBm CW Max.	+20 dBm See Typical Characteristics	
6	Power Connector:	USB Type A Plug	Pass	PMI QA2

QA/QC Approval: _____

PMI
QA2


Date: 9/6/2024




SUMMARY TEST DATA ON P2T-500M18G-USB

44470

Insertion Loss

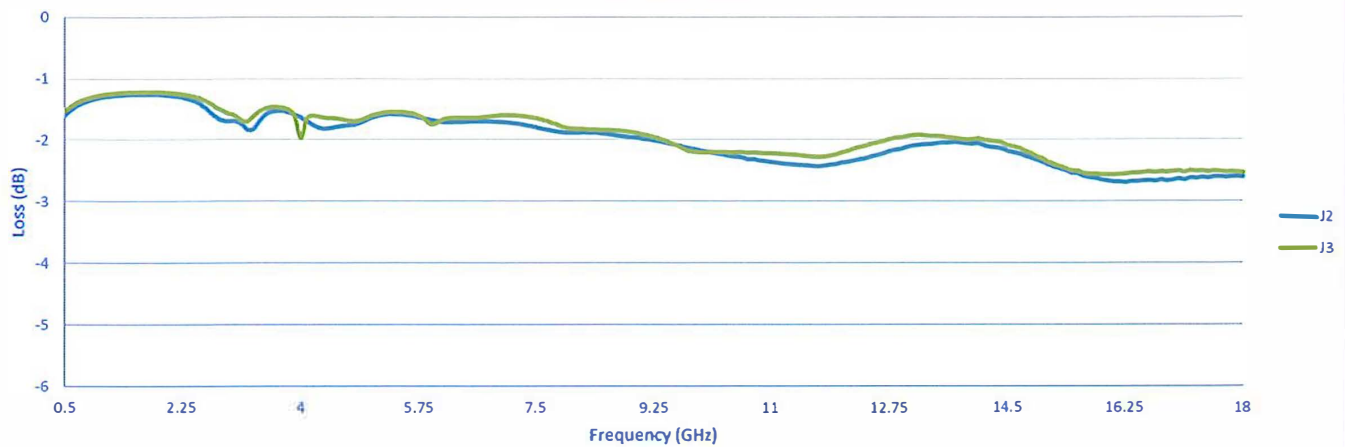

VSWR

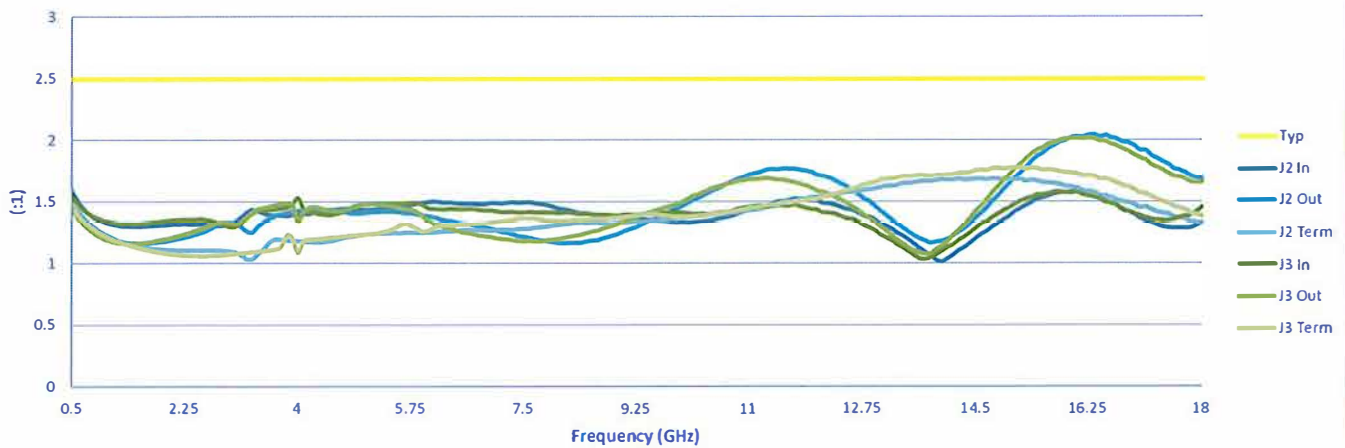

Isolation

