

Summary Test Data ON APD-8-800M2D5G-SFF-30W

Customer: _____
 SO No: _____
 Model No: APD-8-800M2D5G-SFF-30W
 Serial No: 44517
 Part No: _____

Tested By: K Craven
 Temperature: +25 °C
 Date: 12/4/2024
 Drawing No: 27625681 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS +25°C	QA QC	
1	Frequency Range:	0.8 GHz – 2.5 GHz	0.8 GHz – 2.5 GHz	PMI QA2	
2	Insertion Loss:	≤1.2 dB	0.85 dB See Graph		
3	VSWR: (Input)	≤1.40:1	1.25:1 See Graph		
4	VSWR: (Output)	≤1.40:1	1.13:1 See Graph		
5	Isolation:	20 dB Min.	22.4 dB See Graph		
6	Amplitude Balance:	±0.5 dB	±0.11 dB See Graph		
7	Phase Balance:	±5°	0.6° See Graph		
8	Power Handling:	Forward ≤30 W Reverse ≤1 W	See Typical Characteristics		PMI QA2

Note: Amplitude and Phase Balance are relative to J2 port.



QA/QC Approval:  PMI
QA2

Date: 1/29/2025

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com





Summary Test Data ON APD-8-800M2D5G-SFF-30W

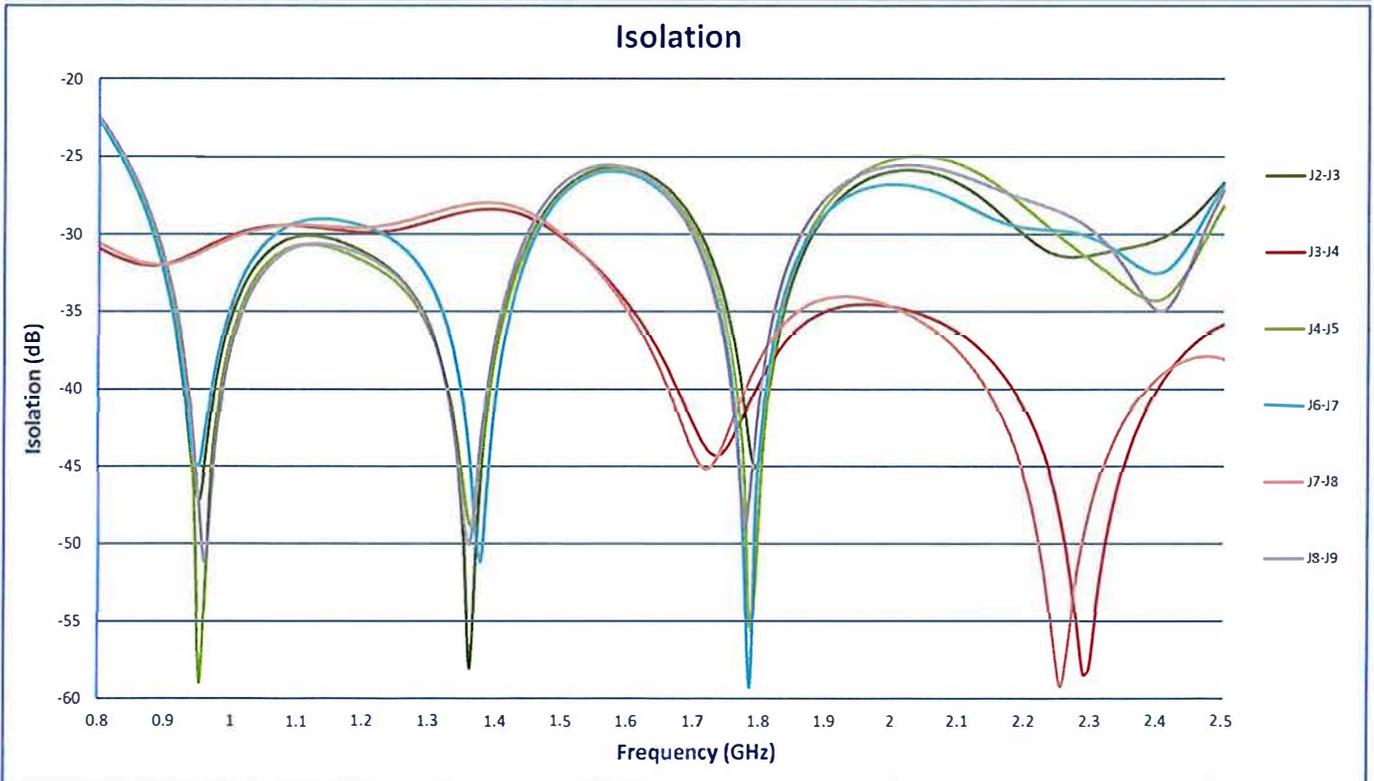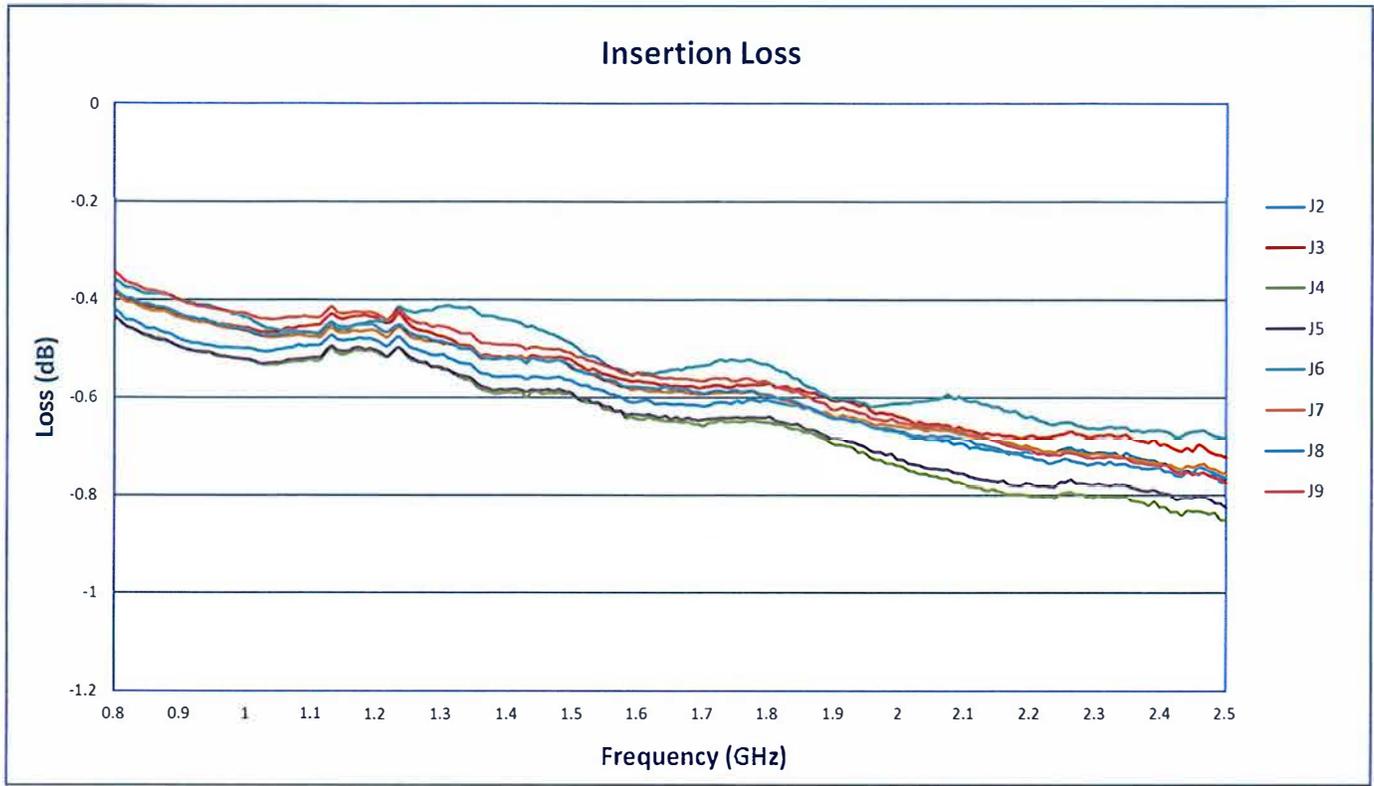



Summary Test Data ON APD-8-800M2D5G-SFF-30W

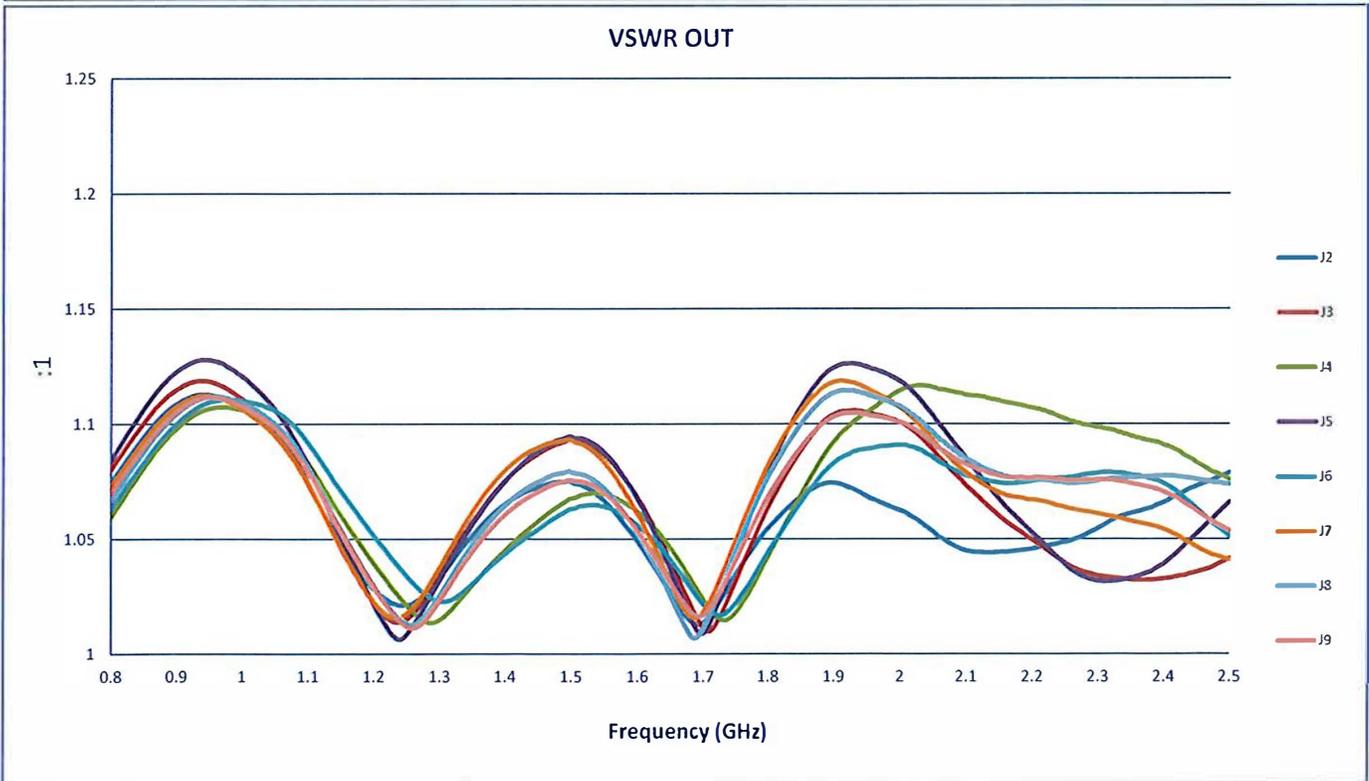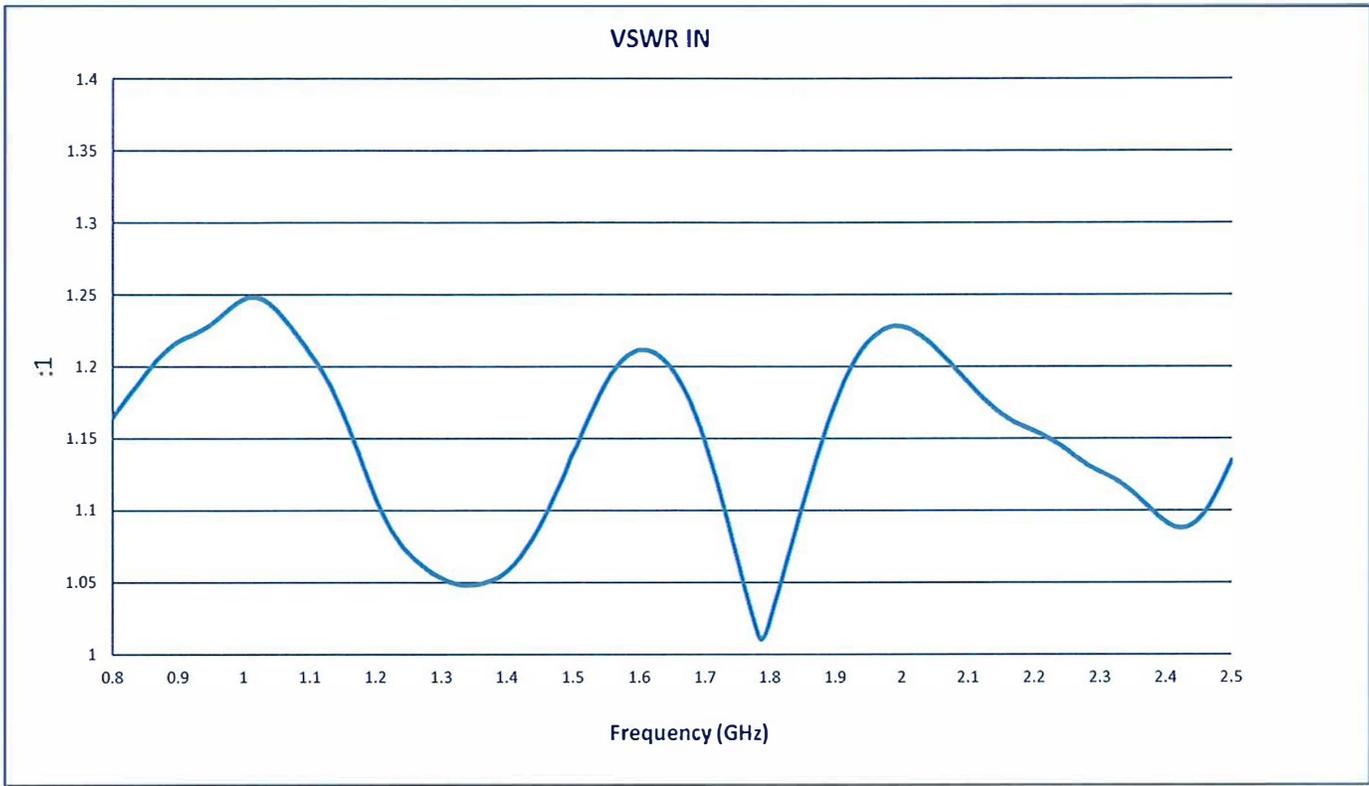

Summary Test Data ON APD-8-800M2D5G-SFF-30W

44517

