

# Summary Test Data ON APD-8-800M2D5G-SFF-30W

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: APD-8-800M2D5G-SFF-30W  
 Serial No: 44518  
 Part No: \_\_\_\_\_

Tested By: K Craven  
 Temperature: +25 °C  
 Date: 12/4/2024  
 Drawing No: 27625681      Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS +25°C	QA QC	
1	Frequency Range:	0.8 GHz – 2.5 GHz	0.8 GHz – 2.5 GHz	PMI QA2	
2	Insertion Loss:	≤1.2 dB	0.95 dB See Graph		
3	VSWR: (Input)	≤1.40:1	1.27:1 See Graph		
4	VSWR: (Output)	≤1.40:1	1.13:1 See Graph		
5	Isolation:	20 dB Min.	22.7 dB See Graph		
6	Amplitude Balance:	±0.5 dB	±0.07 dB See Graph		
7	Phase Balance:	±5°	1.1° See Graph		
8	Power Handling:	Forward ≤30 W Reverse ≤1 W	See Typical Characteristics		PMI QA2



Note: Amplitude and Phase Balance are relative to J2 port.

QA/QC Approval:       PMI  
QA2

Date: 1/29/2025





# Summary Test Data ON APD-8-800M2D5G-SFF-30W

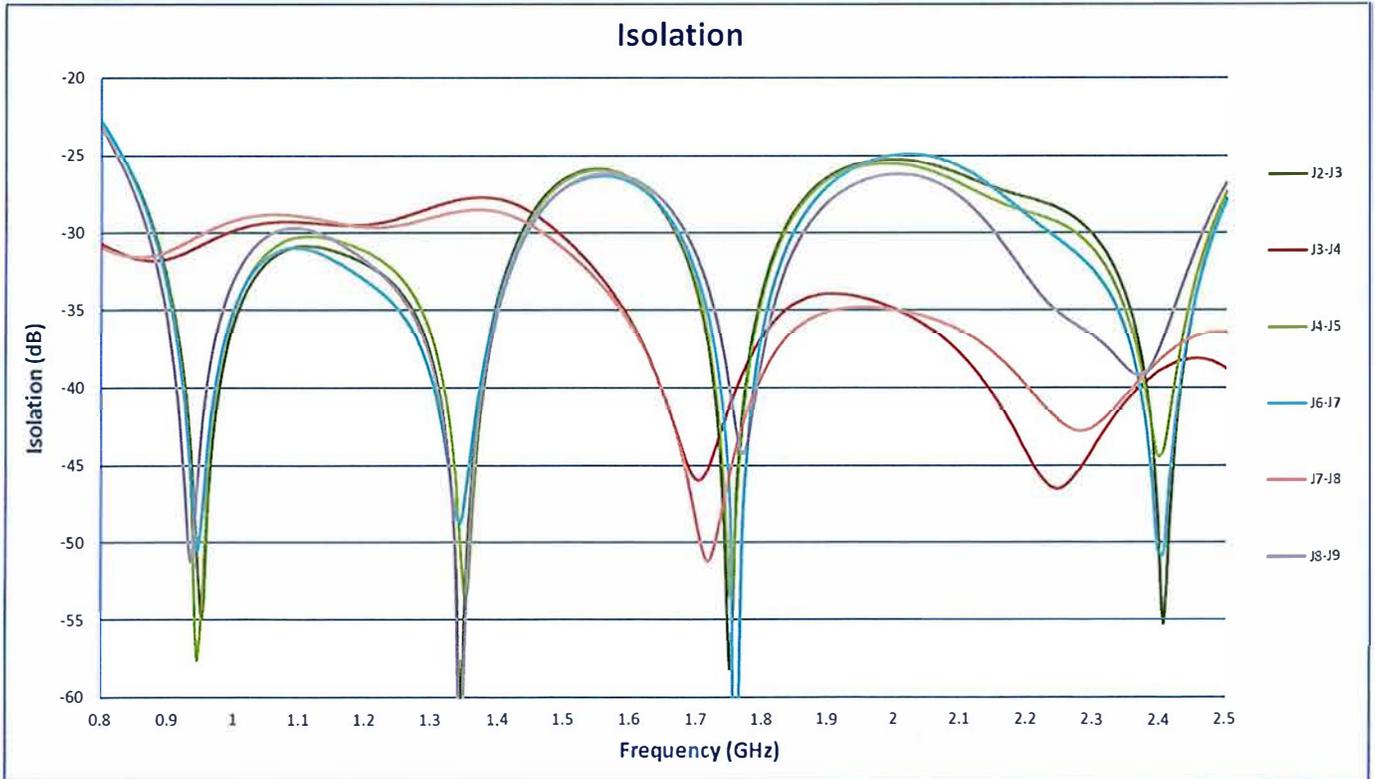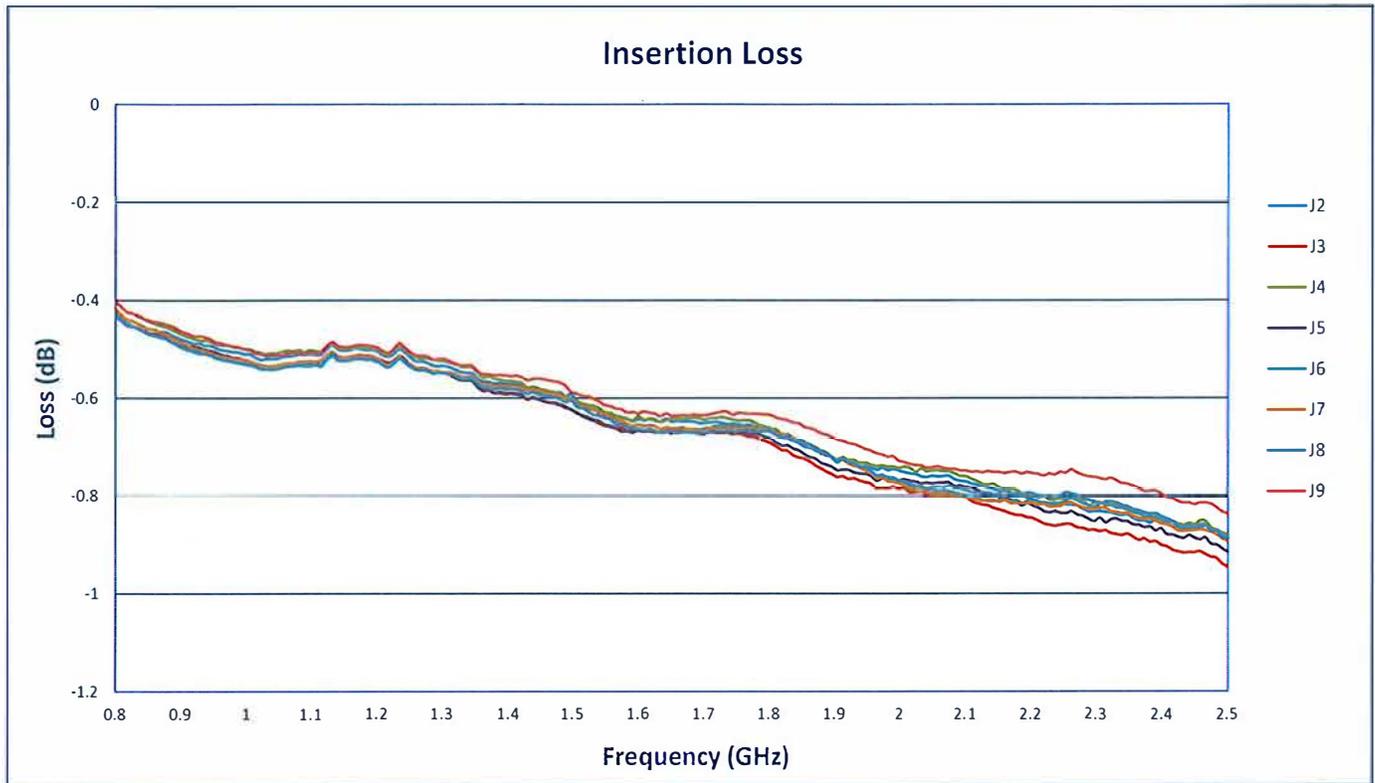



# Summary Test Data ON APD-8-800M2D5G-SFF-30W

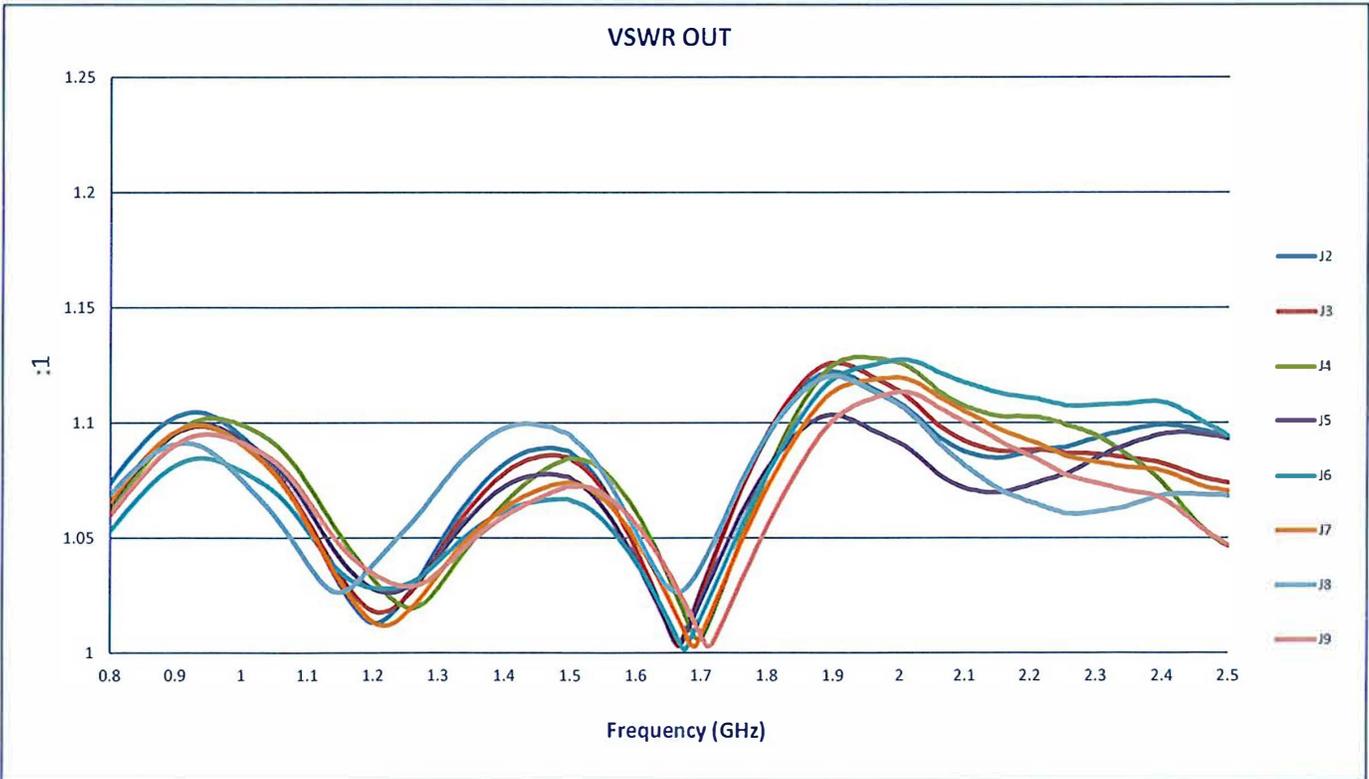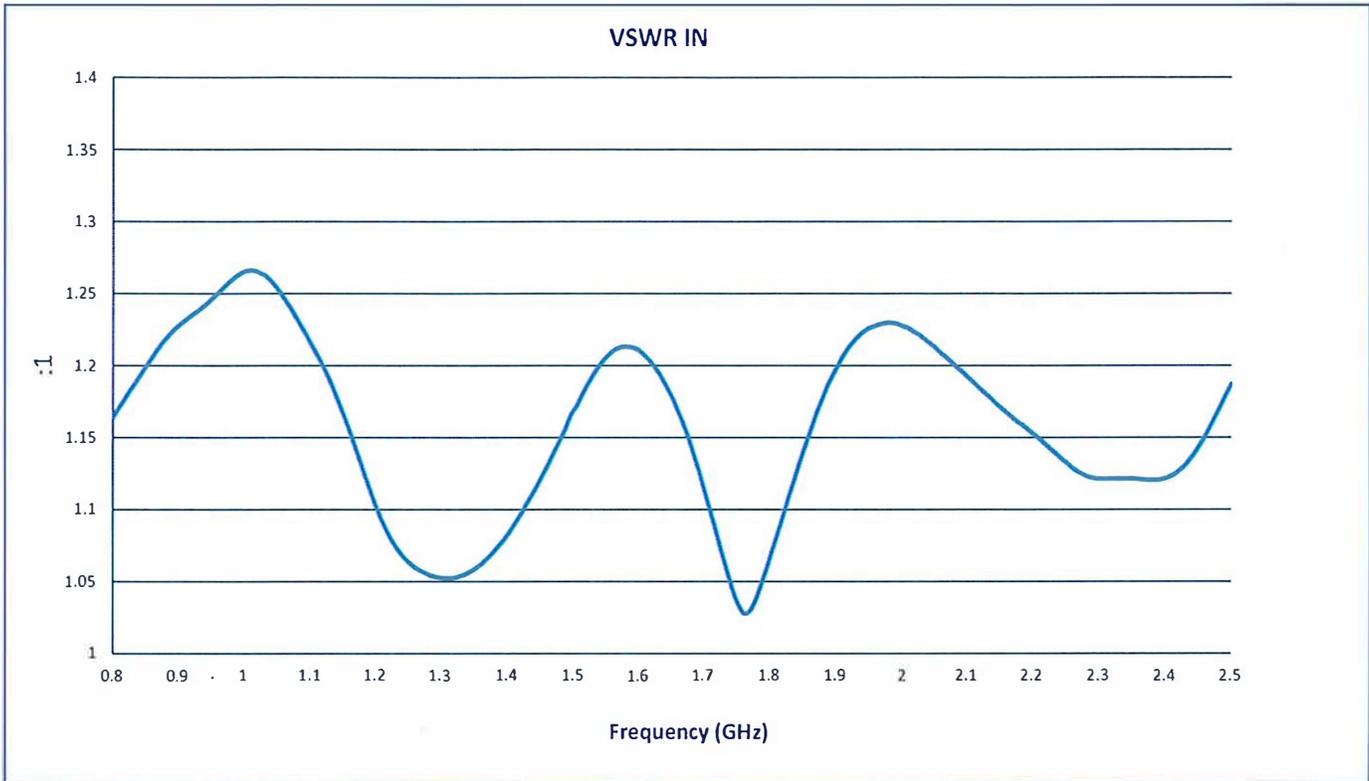

# Summary Test Data ON APD-8-800M2D5G-SFF-30W

44518

