

SUMMARY TEST DATA ON P2T-1G18G-65-T-SFF

Customer: _____
 SO No: _____
 Model No: P2T-1G18G-65-T-SFF
 Serial No: 44522

Tested By: John Berrocal
 Temperature: 25 °C
 Date: 12/5/2024
 Drawing No: 27626502 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	1.0 TO 18.0 GHz	1.0 TO 18.0 GHz	PMI QA2
2	Insertion Loss:	3.5 dB Max	2.92 dB See Graph	
3	Isolation:	65 dB Typ	78.54 dB See Graph	
4	VSWR:	2.0:1 Max.	1.75:1 See Graph	
5	Input Power:	+30dBm Max (Survival) +20dBm Max (Operating)	Pass See Typical Characteristics	
6	Switching Speed:	100 ns Max	Pass See Typical Characteristics	
7	Impedance:	50 Ω	Pass	
8	DC Supply:	+5 VDC @ 100 mA Typ. -15 VDC @ 100 mA Typ.	+5 VDC @ 55 mA -15 VDC @ 70 mA	
9	Control Signal:	Logic Table		
		CTL1	Function	
		0	J1-J2 low Loss	
1	J1-J3 Low loss			

QA/QC Approval: _____




PMI
QA2

Date _____


12/4/2024

SUMMARY TEST DATA ON P2T-1G18G-65-T-SFF


Insertion Loss

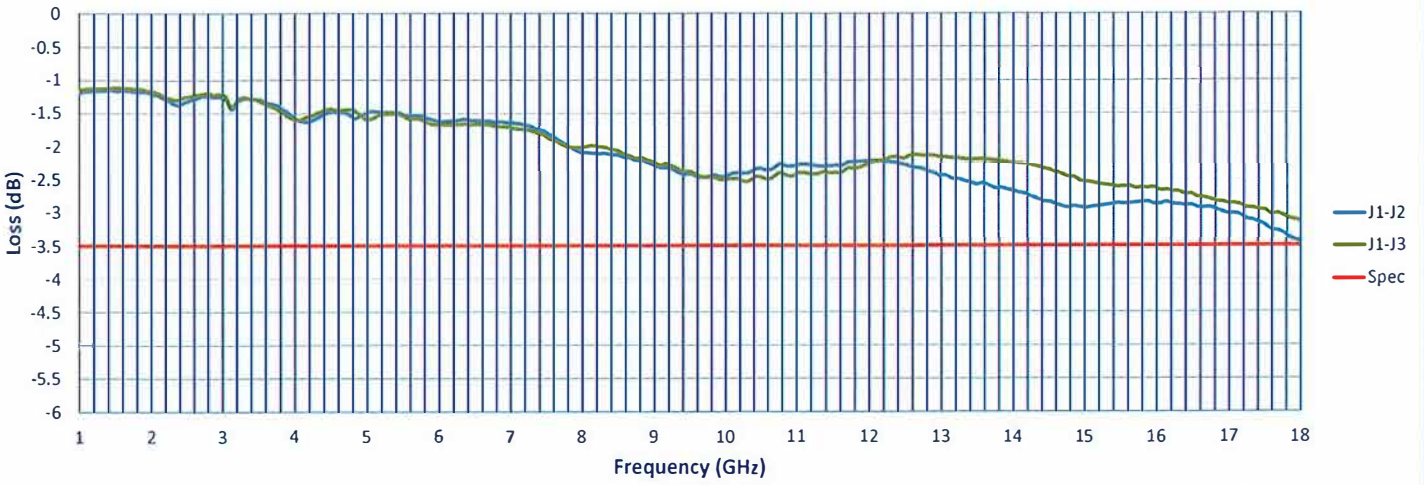

VSWR (On)

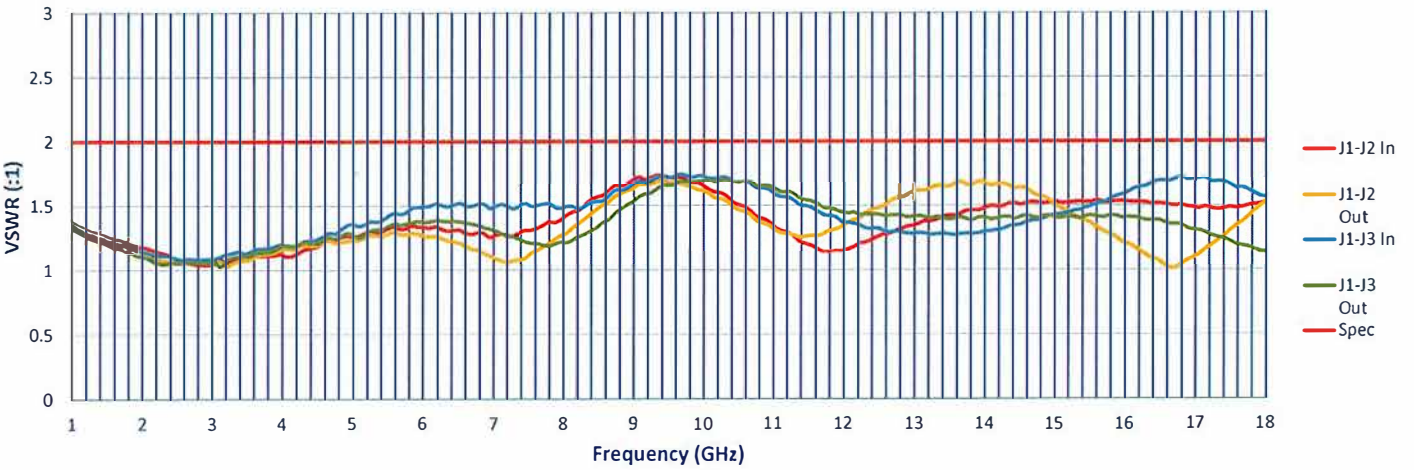

VSWR (Off)

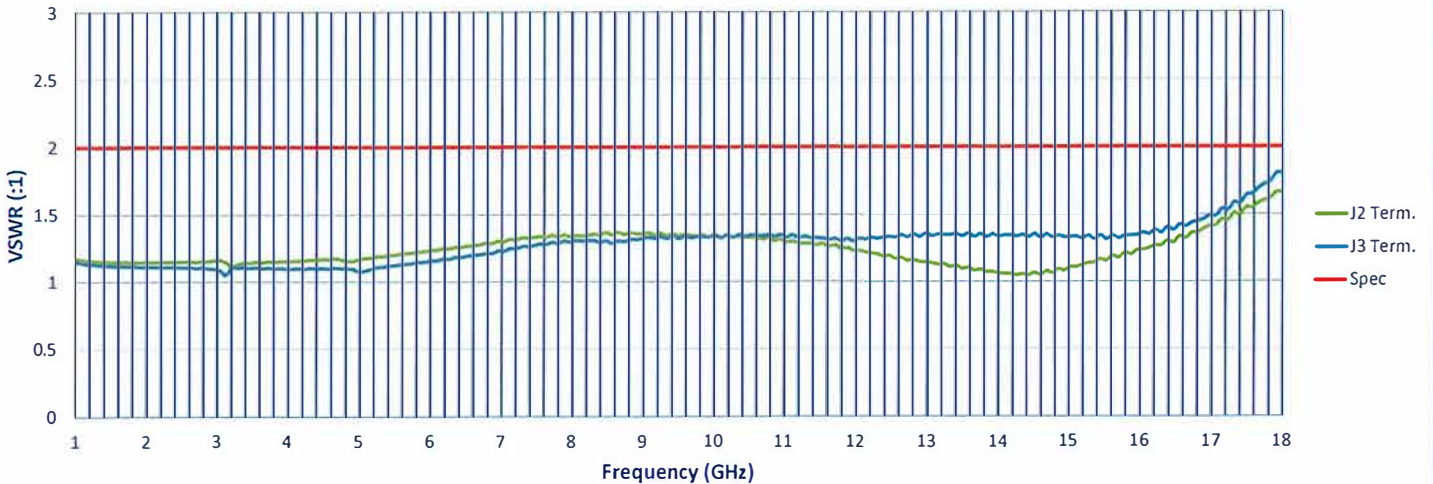

SUMMARY TEST DATA ON P2T-1G18G-65-T-SFF

