

# SUMMARY TEST DATA ON PVVAN-2040-60-MP

Customer: \_\_\_\_\_

Tested By: K. Mansfield

Job No: \_\_\_\_\_

Date: Thursday, February 2, 2023

Model No: \_\_\_\_\_

Temperature: +25° C

Serial No: 61431

Drawing No: 27622574

Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC	
1	Frequency Range:	2.0 GHz to 4.0 GHz	2.0 GHz to 4.0 GHz	PMI QA2	
2	Mean Attenuation Range:	60 dB	63.4 dB		
3	Insertion Loss:	2.0 dB Max.	1.66 dB See Plot		
4	VSWR:	2.0:1 Max	1.37:1 See Plot		
5	Power Rating:	+20 dBm (Operating) +30 dBm (Survival)	See Typical Characteristics		
6	Attenuation Flatness:	±0.45 dB @ 10 dB ±0.80 dB @ 20 dB ±1.50 dB @ 40 dB ±1.60 dB @ 60 dB Typical	±0.38 dB @ 10 dB ±0.82 dB @ 20 dB ±1.54 dB @ 40 dB ±1.91 dB @ 60 dB See Plot		
7	Switching Time:	500 ns Max.	See Typical Characteristics		
8	Control:	10 dB / Volt Analog Controlled	10 dB / Volt		
9	Power Supply:	+12 V to +15 V @ 125 mA Max. -12 V to -15 V @ 50 mA Max.	+15 V @ 42 mA -15 V @ 0 mA		PMI QA2




QA/QC Approval: 

PMI  
QA2

Date: 2/3/2023

# SUMMARY TEST DATA ON PVVAN-2040-60-MP

V000977093020161431

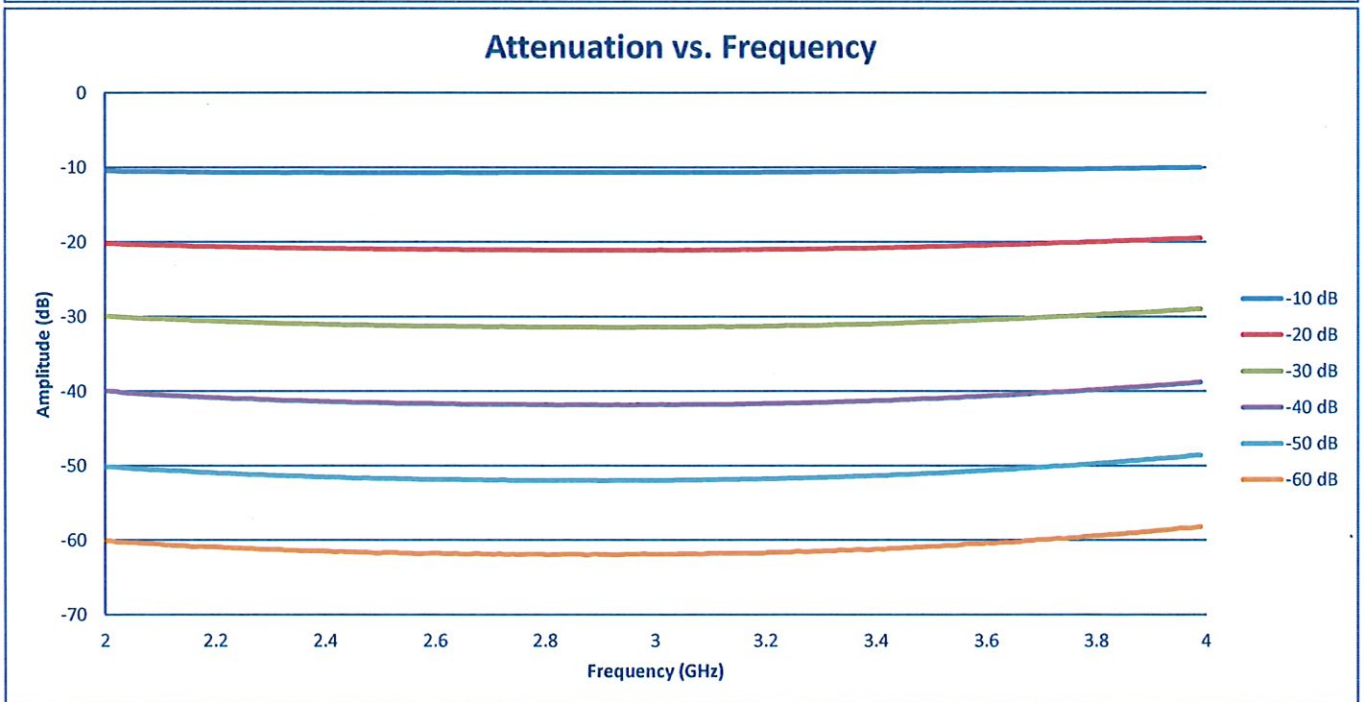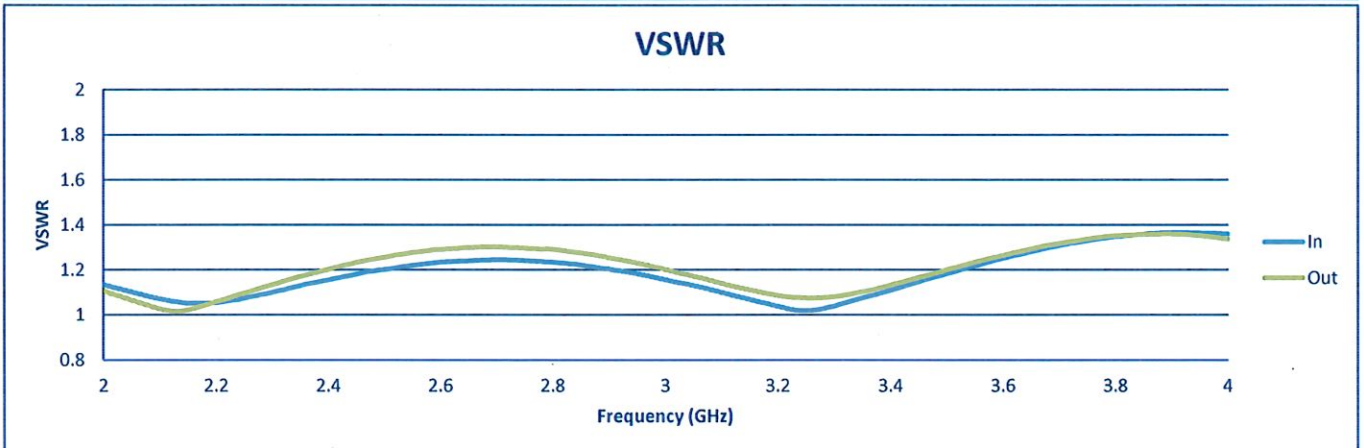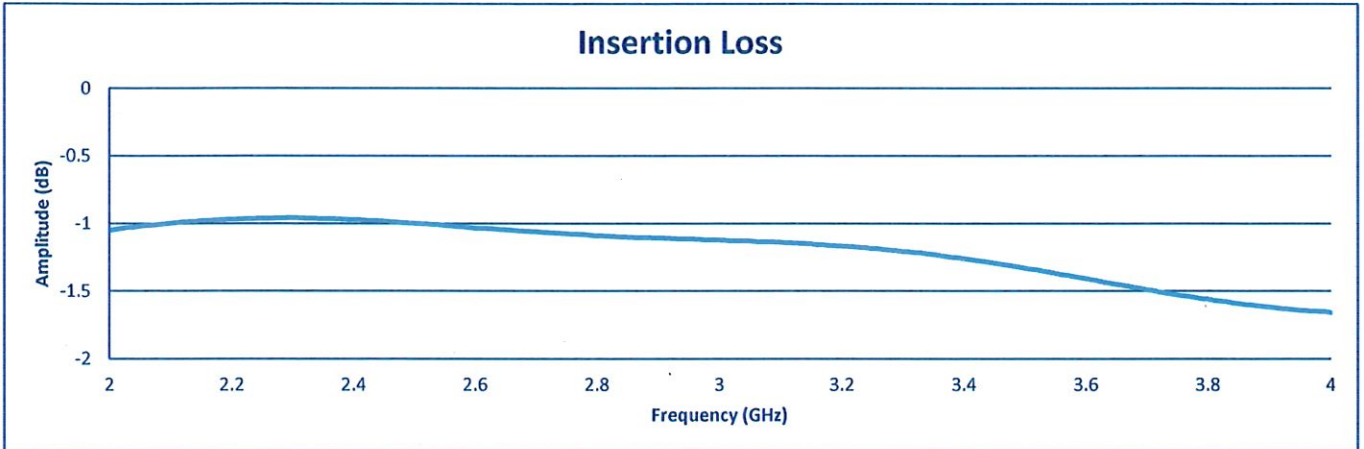

# SUMMARY TEST DATA ON PVVAN-2040-60-MP

V000977093020161431

