

Summary Test Data ON APD-8-800M2D5G-SFF-30W

Customer: _____
 SO No: _____
 Model No: APD-8-800M2D5G-SFF-30W
 Serial No: 64959
 Part No: _____

Tested By: OLIVER K
 Temperature: +25 °C
 Date: 3/25/2026
 Drawing No: 27625681 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS +25°C	QA QC	
1	Frequency Range:	0.8 GHz – 2.5 GHz	0.8 GHz – 2.5 GHz	PMI QA5	
2	Insertion Loss:	≤1.2 dB	0.98 dB See Graph	PMI QA5	
3	VSWR: (Input)	≤1.40:1	1.23:1 See Graph		
4	VSWR: (Output)	≤1.40:1	1.22:1 See Graph		
5	Isolation:	20 dB Min.	21.2 dB See Graph		
6	Amplitude Balance:	±0.5 dB	±0.11 dB See Graph		
7	Phase Balance:	≤±5°	2.3° See Graph		
8	Power Handling:	Forward ≤30 W Reverse ≤1 W	See Typical Characteristics		PMI QA5



Note: Amplitude and Phase Balance are relative to J2 port.

QA/QC Approval: *Jordan Syed* Date: 3-31-26

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com



Summary Test Data ON APD-8-800M2D5G-SFF-30W

64959

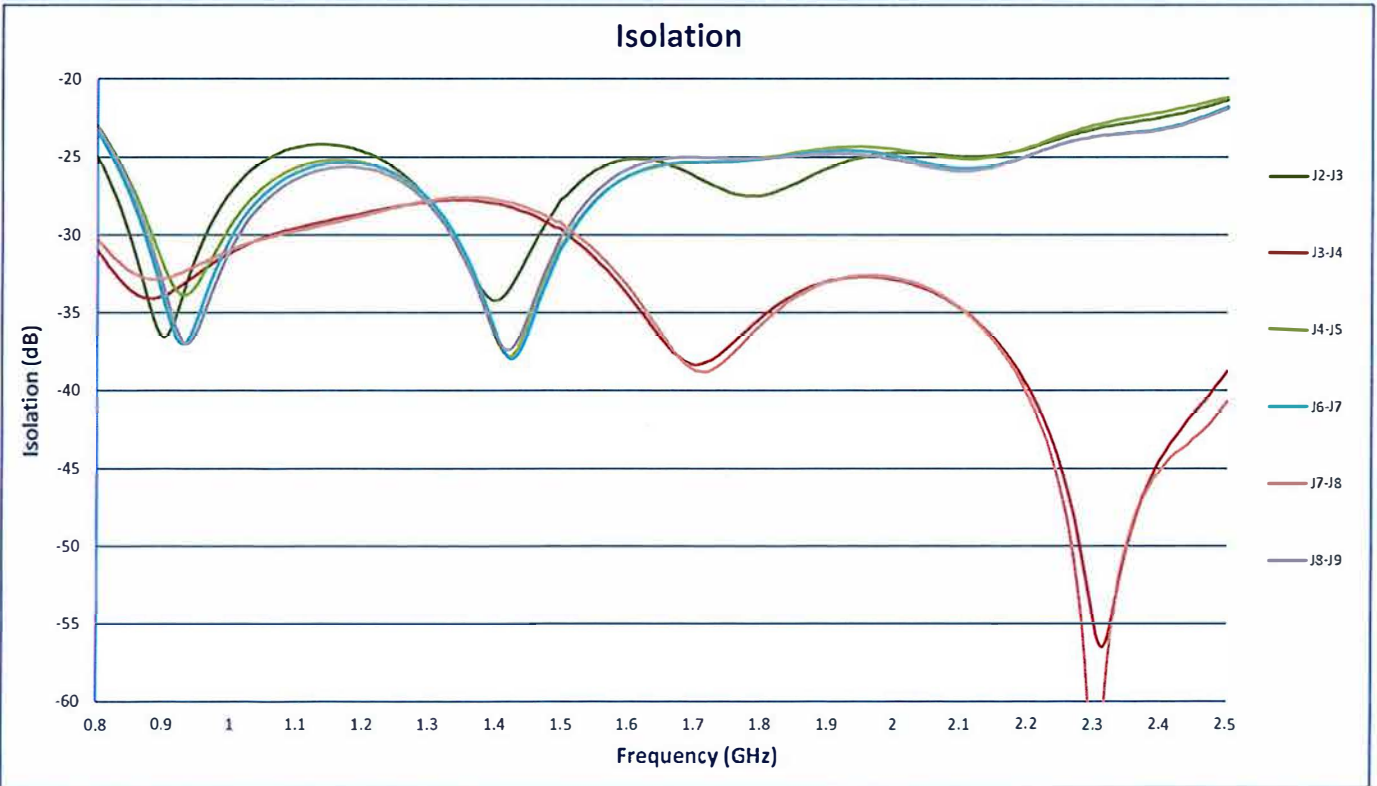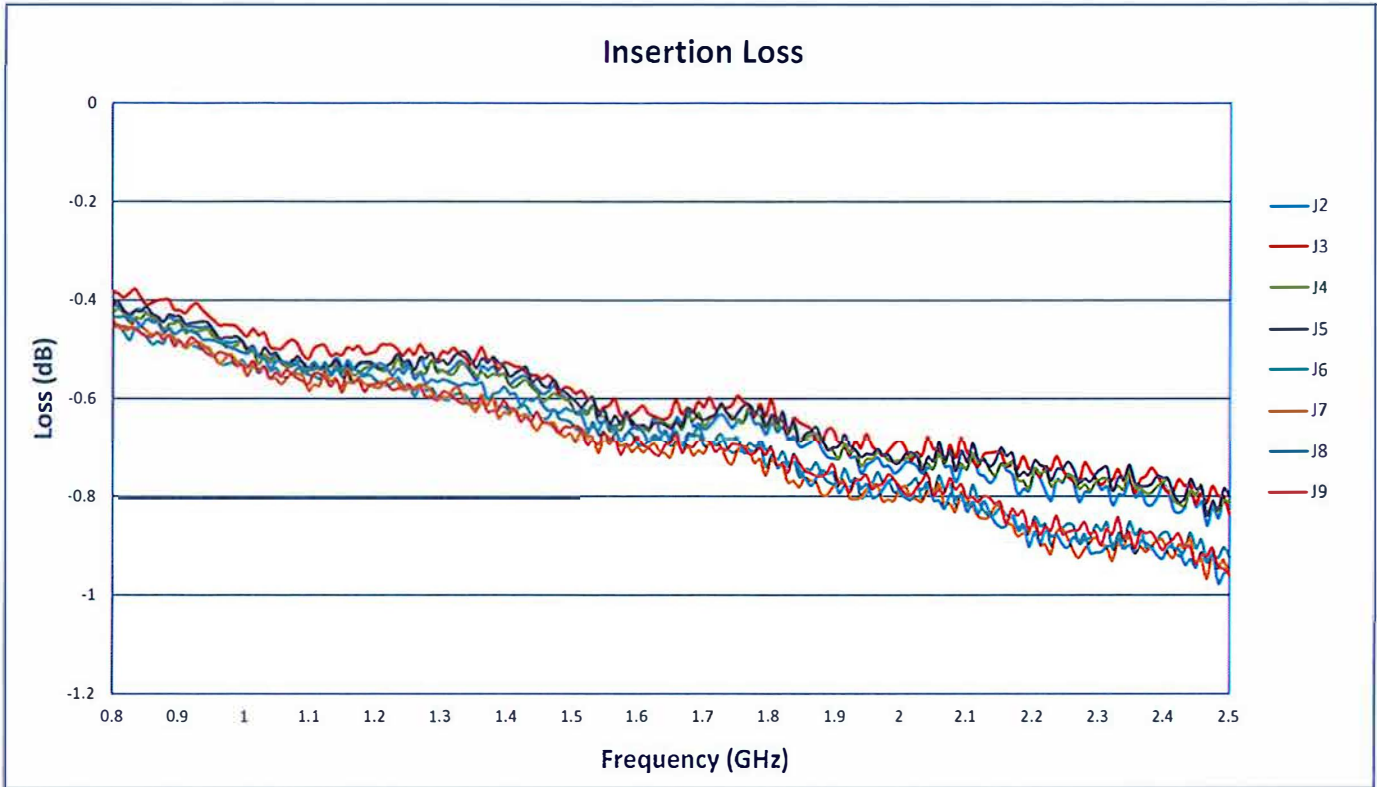

Summary Test Data ON APD-8-800M2D5G-SFF-30W

64959

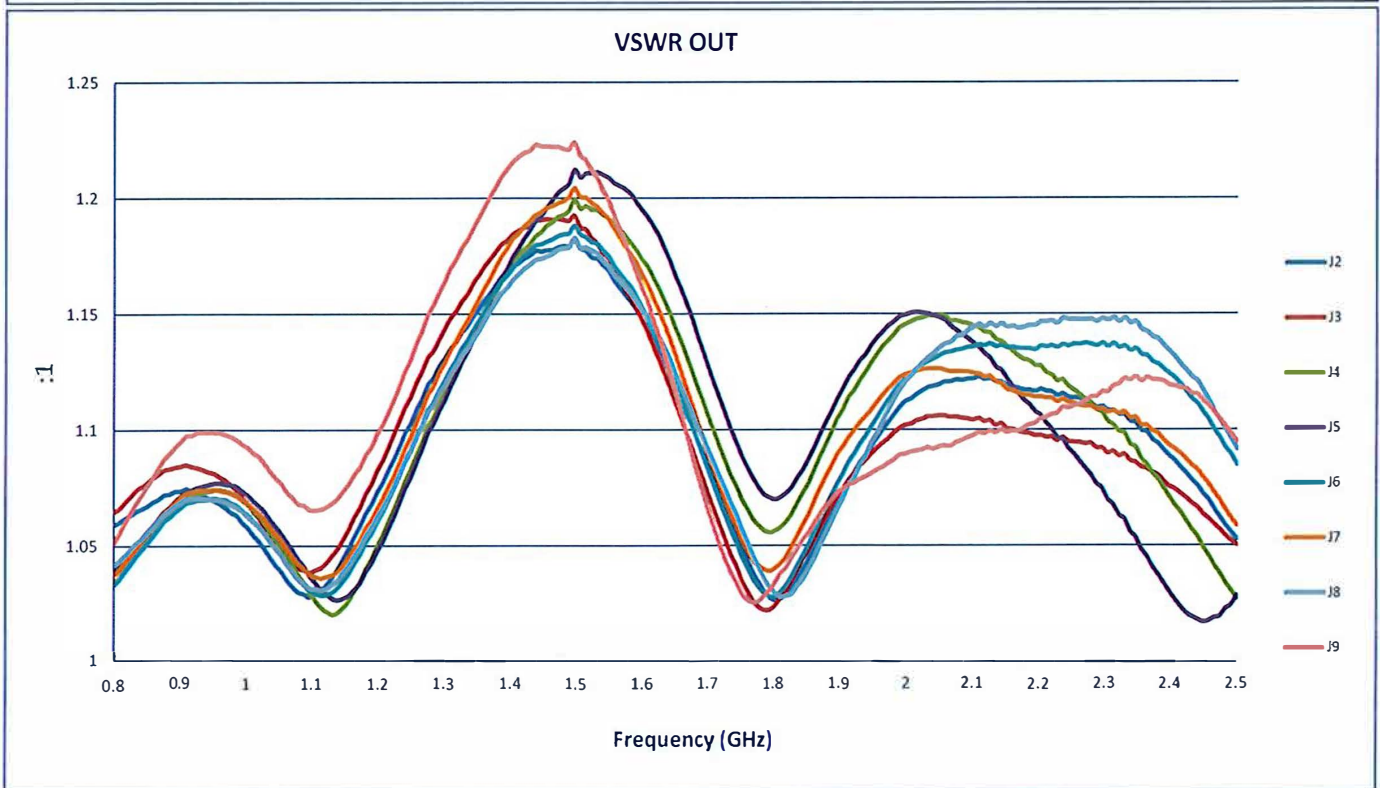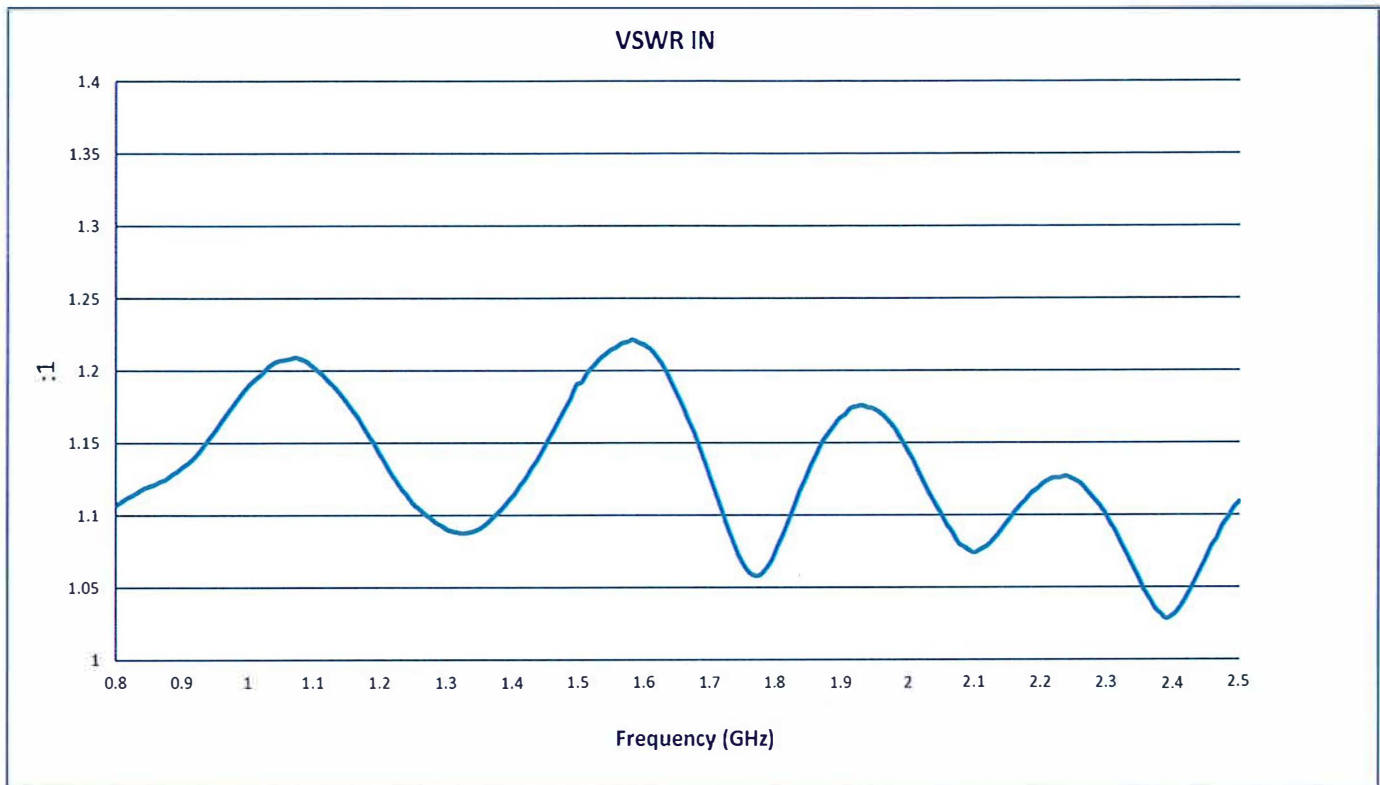

Summary Test Data ON APD-8-800M2D5G-SFF-30W

64959

