

SUMMARY TEST DATA

Customer: _____
 SO No: _____
 Model No: P2T-0R5G18G-55-T-SFF-PN
 Serial No: 65084
 Part No: _____




Tested By: A. Mousavi
 Temperature: 25°C
 Date: 7/16/2026
 Drawing No: 27616508 Rev: B1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	0.5 GHz to 18 GHz	0.5 GHz to 18 GHz	PMI QA5
2	Insertion Loss	3.75 dB Max.	3.34 dB	
3	Isolation	60 dB Min., 0.5-10 GHz 55 dB Min., 10-18 GHz	84.2 dB 71.2 dB	
4	VSWR: In/Out	2:1 Max.	1.84:1 In 1.87:1 Out	
5	Switching Speed Max	100 ns Max.	Pass See Typical Characteristics	
6	Operating Power	20 dBm CW Max	Pass See Typical Characteristics	
7	Control Signal	TTL LOGIC (ctl1,ctl2) 00: J2&J3 ON 01: J1-J2 10: J1-J3	Pass	
8	Power Supply	5 V @ 80 mA	5 V @ 30 mA	
9	Power Supply	-12 to -15 V @ 50 mA	-15 V @ 80 mA	PMI QA5

QA/QC Approval: _____

Date: _____

SUMMARY TEST DATA
ON
P2T-0R5G18G-55-T-SFF-PN

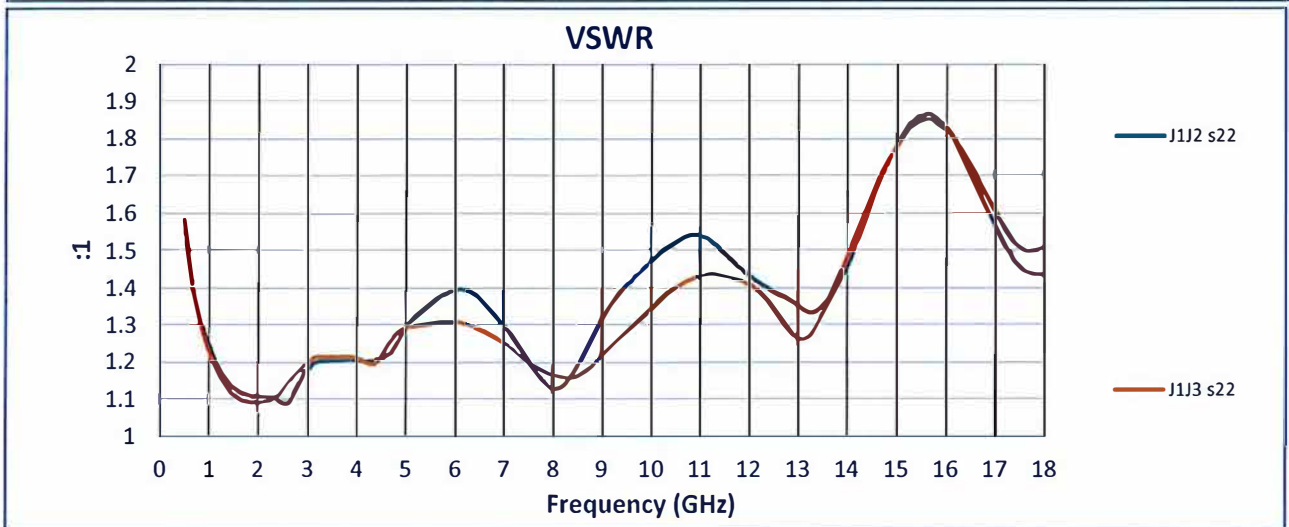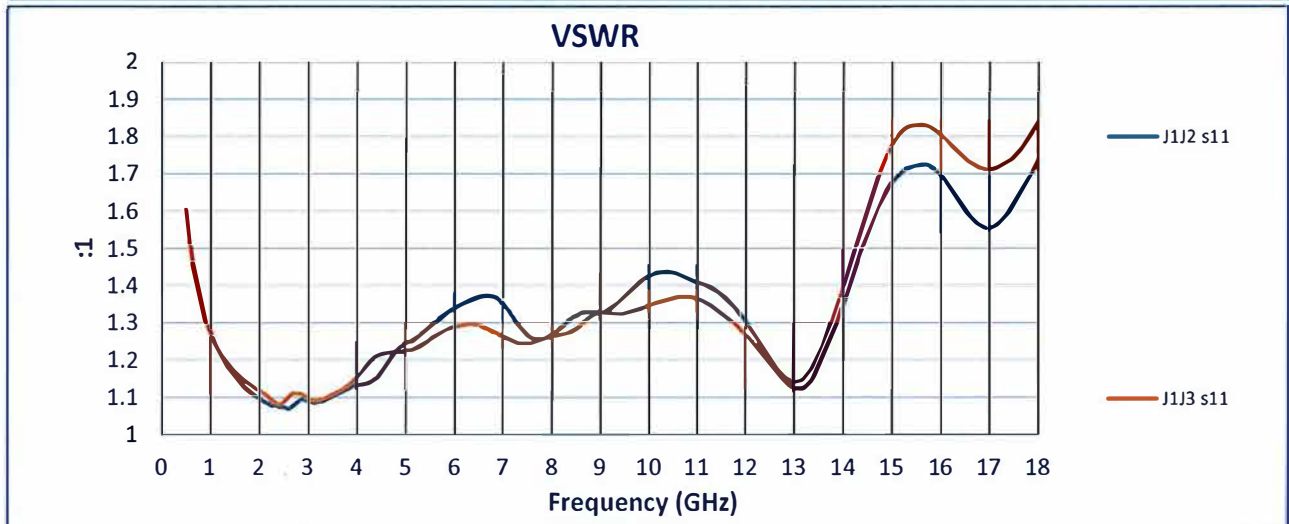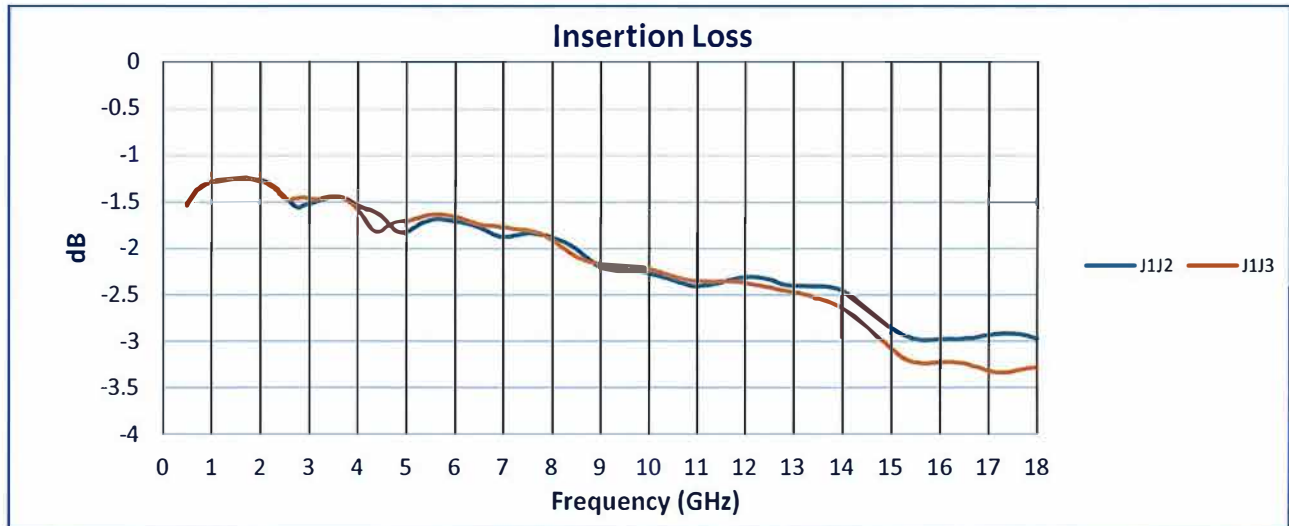

SUMMARY TEST DATA
ON
P2T-0R5G18G-55-T-SFF-PN

