

SUMMARY TEST DATA ON PTB-42-1G40G-12-292FF-DC12

Customer: _____
 SO No: _____
 Model No: PTB-42-1G40G-12-292FF-DC12
 Serial No: 71749
 Part No: _____

Tested By: K. Mansfield
 Temperature: 25 Degrees C
 Date: 2/2/2023
 Drawing No: 27606212 REV: A2

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC	
1	Frequency Range:	1.0 GHz - 40 GHz	1.0 GHz - 40 GHz	PMI QA2	
2	Gain:	40 dB Typ.	+32.2 dB Min. +37.2 dB Max. See Graph		
3	Gain Flatness:	±2.5 dB Typ.	±2.52 dB See Graph		
4	Noise Figure:	5.0 dB Typ. MID-BAND	4.8 dB See Typical Characteristics		
5	OP1dB:	+22 dBm Typ. (1-18 GHz) +18 dBm Typ. (18-40 GHz)	+20 dBm +16 dBm See Typical Characteristics		
6	VSWR: (Input/Output)	2.5:1 Typ.	1.8:1 In 2.2:1 Out See Graph		
7	Maximum RF Input:	+15 dBm	+15 dBm		
8	AC Voltage Supply:	120 VAC	120 VAC		
9	DC Voltage Supply: (External)	+12 VDC	+12 VDC @ 580 mA		PMI QA2




QA/QC Approval: 

PMI
QA2

Date: 2/3/2023

**SUMMARY TEST DATA
ON
PTB-42-1G40G-12-292FF-DC12**

71749

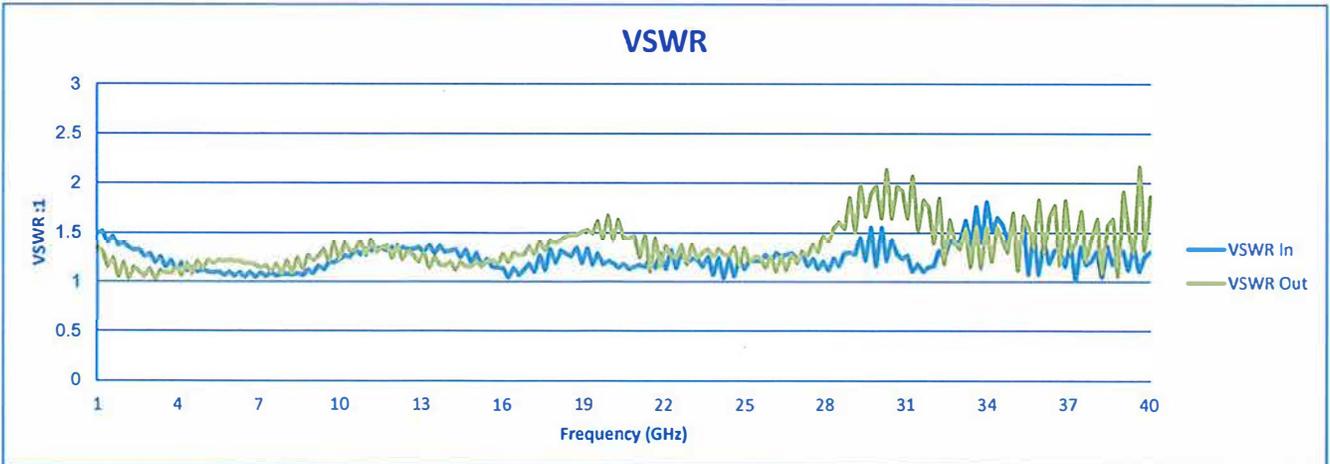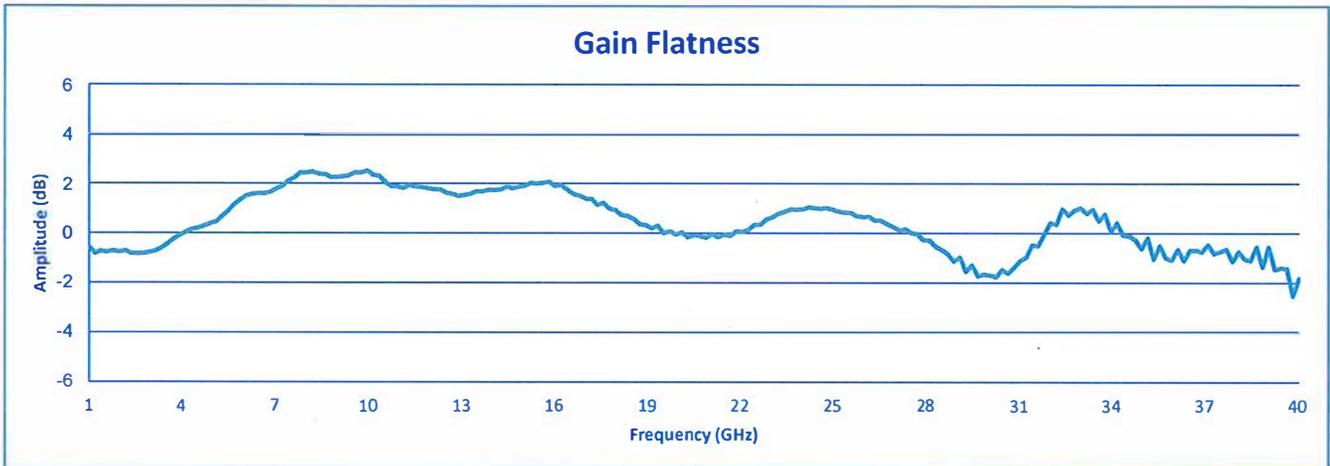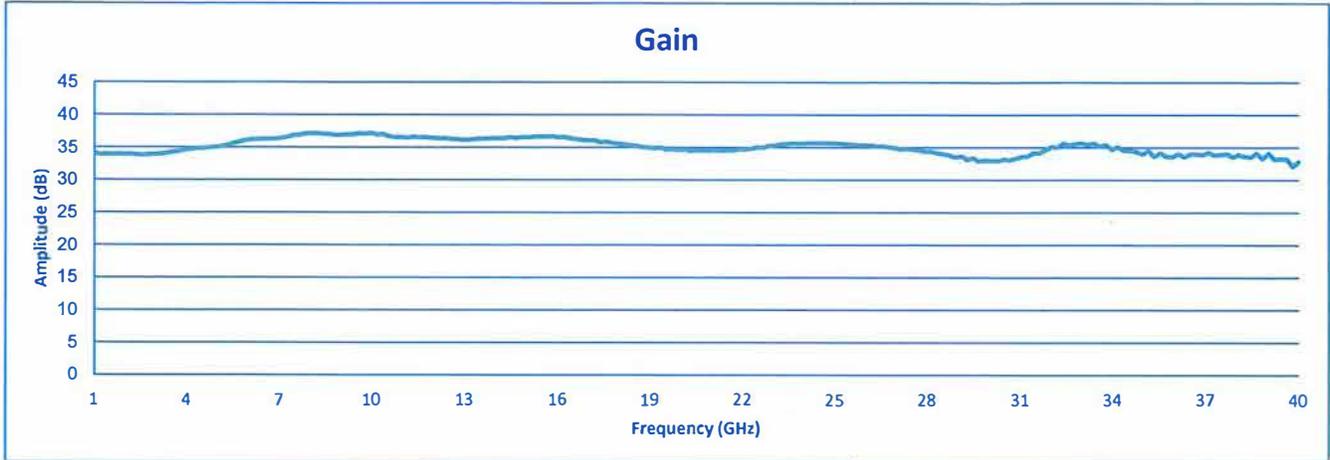

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com