

DESCRIPTION

PMI MODEL: APD-2-218-FD IS A TWO WAY POWER DIVIDER OPERATING OVER THE 2.0 TO 18.0 GHz FREQUENCY RANGE. THIS MODEL HAS A MAXIMUM INSERTION LOSS OF 1.5 dB AND HAS VERY GOOD PHASE AND AMPLITUDE MATCH. THE COMPACT 1.58" x 1.00" x 0.40" HOUSING IS OUTFITTED WITH 2.92 mm FEMALE CONNECTORS.

SPECIFICATIONS

- FREQUENCY RANGE: --- 2.0 TO 18.0 GHz
- INSERTION LOSS: ----- 1.5 dB MAXIMUM
- VSWR: ----- 2.0:1 MAXIMUM
- ISOLATION: ----- 16 dB MINIMUM
- AMPLITUDE BALANCE: -- ±0.5 dB MAXIMUM
- PHASE BALANCE: ----- ±2.5° MAXIMUM
- AVERAGE POWER: ----- 25 WATTS (INTO 1.2:1 LOAD VSWR)
7.5 WATTS (INTO 2.0:1 LOAD VSWR)
0.75 WATTS (INTO ∞:1 LOAD VSWR)
- CONNECTORS: ----- 2.92 mm FEMALE REMOVABLE
- SIZE: ----- 40.1 mm x 25.4 mm x 10.2 mm
[1.58" x 1.00" x 0.40"]
EXCLUDING CONNECTORS
- FINISH: ----- PAINTED BLUE

ENVIRONMENTAL RATINGS


- TEMPERATURE: ----- -55 °C TO +85 °C (OPERATING)
-65 °C TO +125 °C (STORAGE)
- HUMIDITY: ----- MIL-STD-202, METHOD 103B COND. B
- SHOCK:----- MIL-STD-202, METHOD 213B COND. B
- VIBRATION: ----- MIL-STD-202, METHOD 204D COND. B
- ALTITUDE: ----- MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE: ----- MIL-STD-202, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	02/08/18	

MECHANICAL OUTLINE

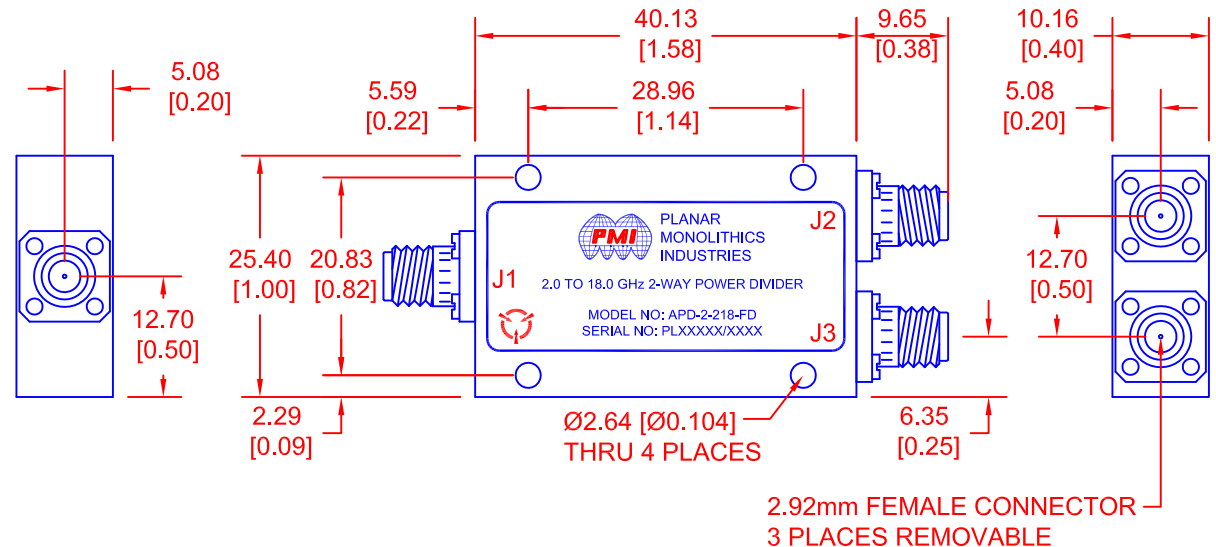

ALL DIMENSIONS
ARE IN mm [INCH]
TOLERANCES:
X.XX ± 0.508 [0.020]
X.XXX ± 0.254 [0.010]

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			REV.
DRAWN <i>M. Berry</i>		02/08/17	PRODUCT FEATURE APD-2-218-FD 2.0 to 18.0 GHz Two Way Power Divider			A1
CHECKED			SIZE	FSCM NO.	DWG NO.	
ISSUED			A	05XQ0	27034180	
			SCALE	N:S	SHEET	1 OF 1