


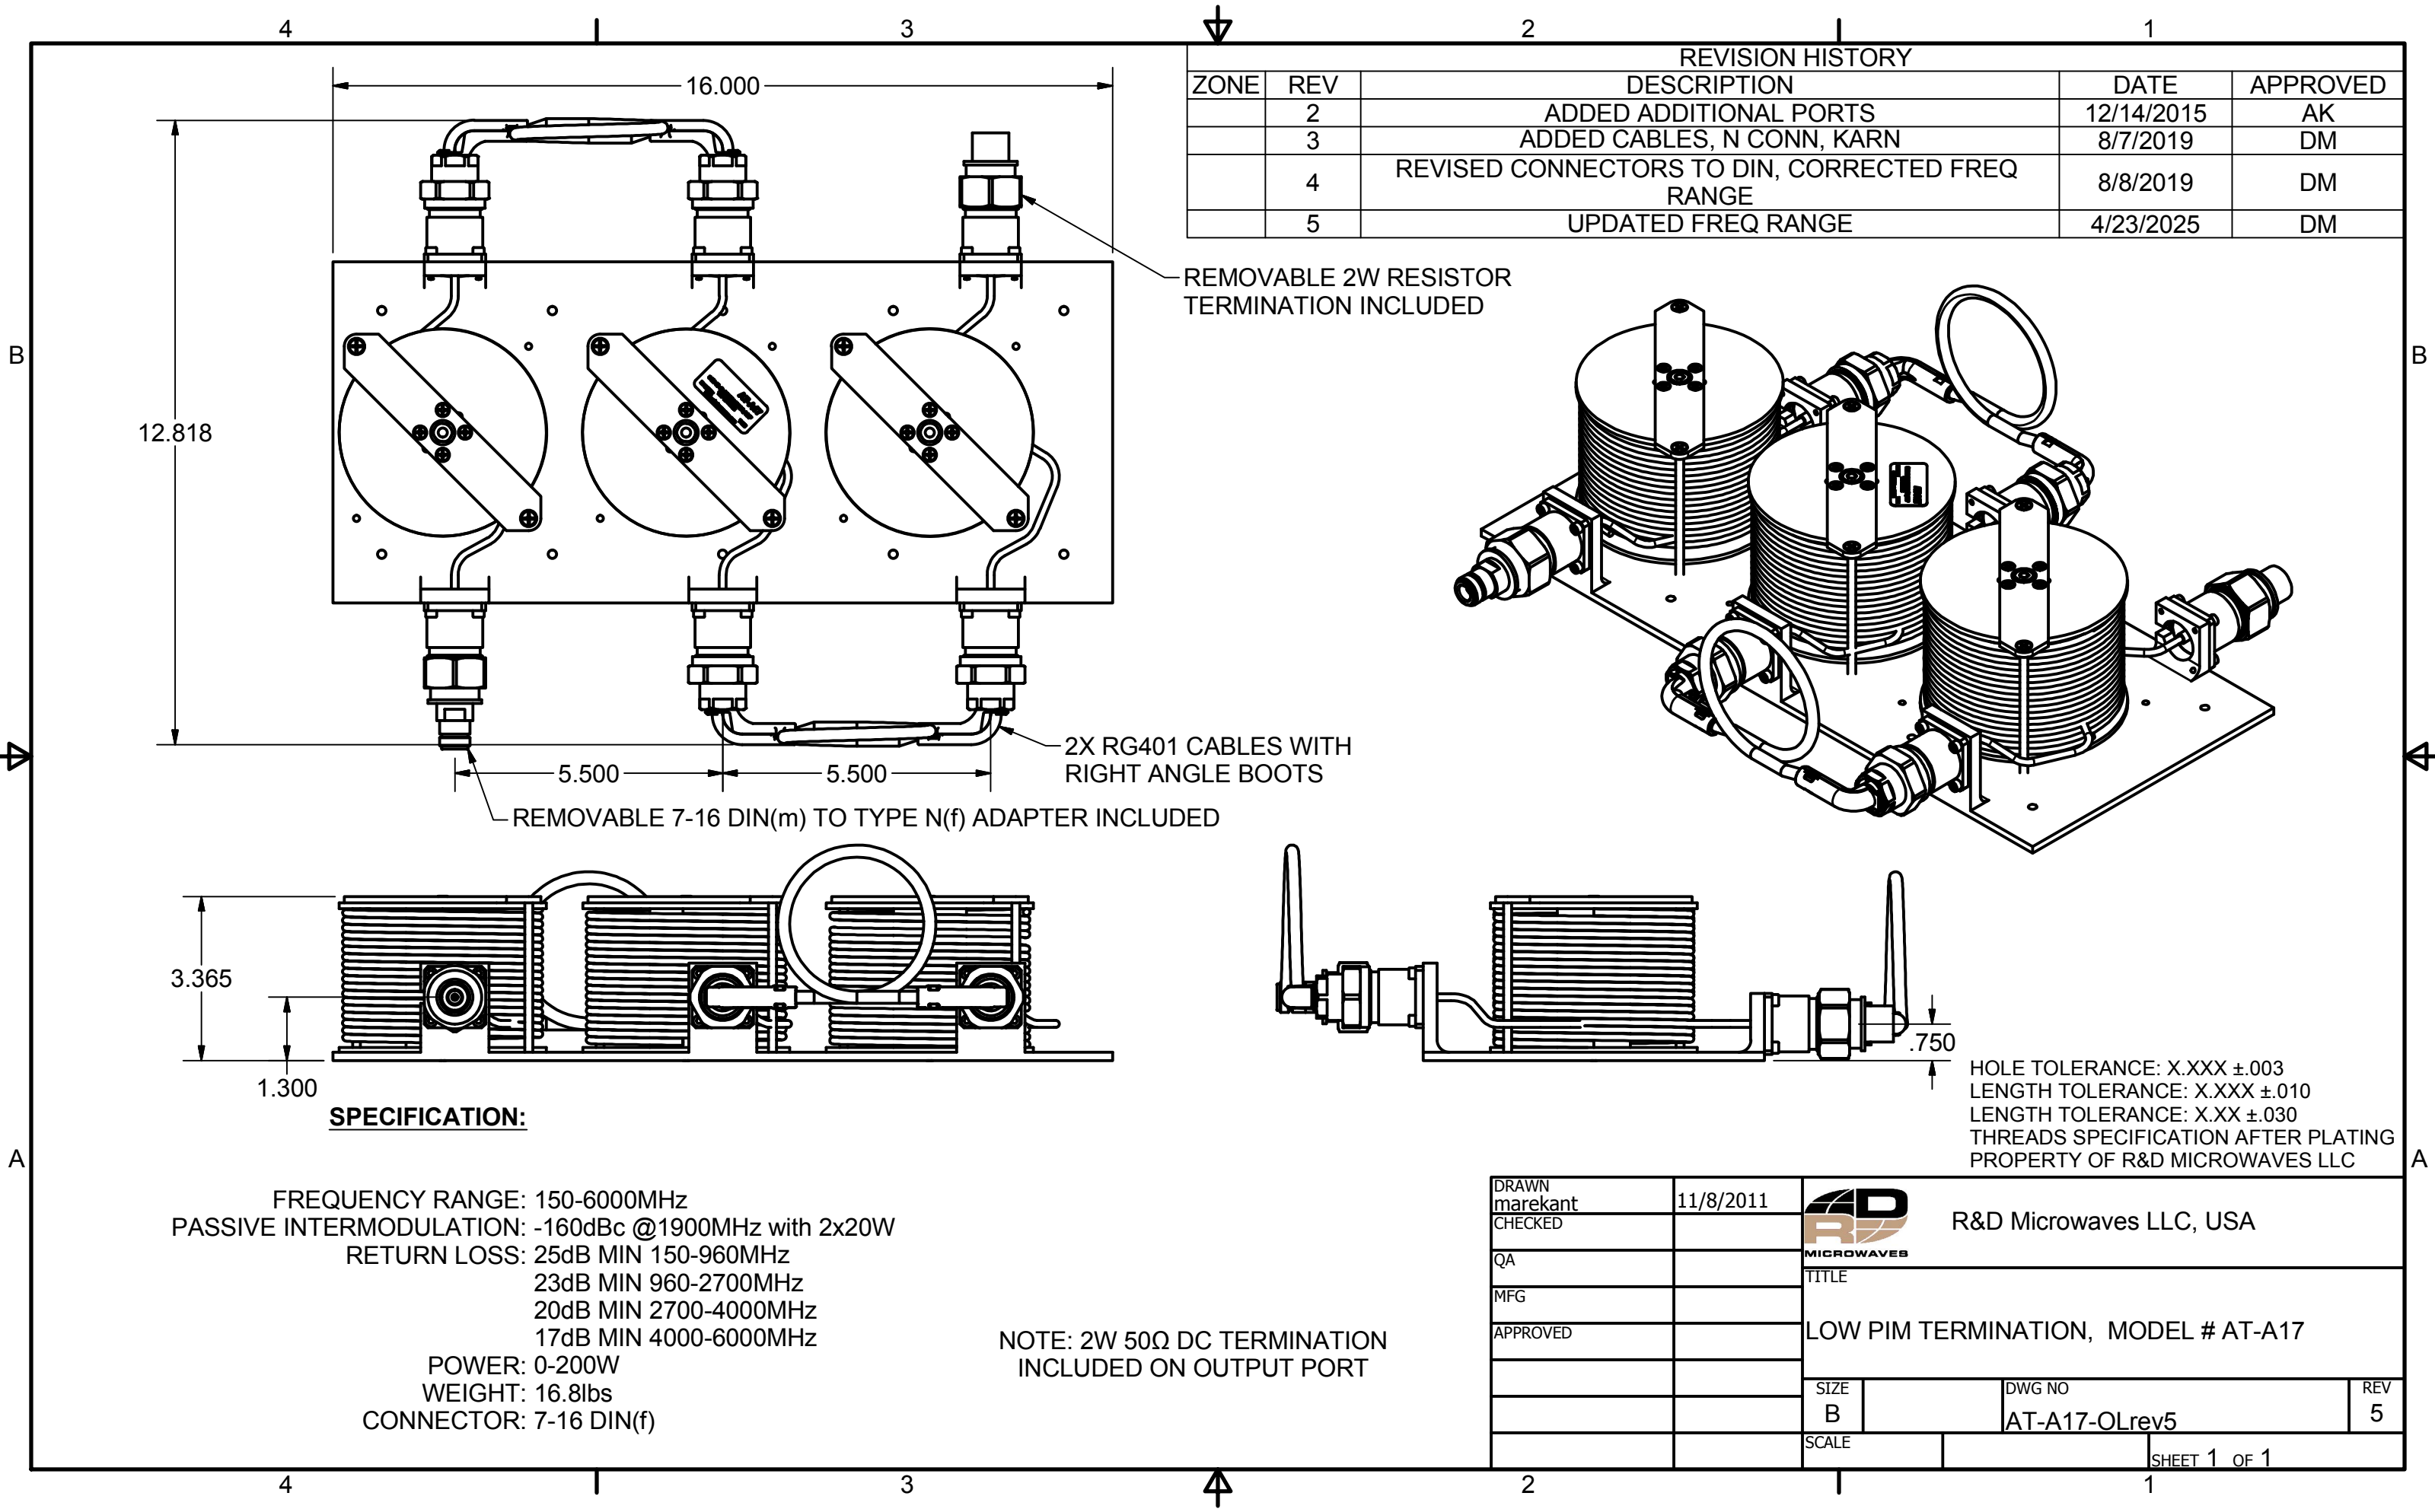

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	2	ADDED ADDITIONAL PORTS	12/14/2015	AK
	3	ADDED CABLES, N CONN, KARN	8/7/2019	DM
	4	REVISED CONNECTORS TO DIN, CORRECTED FREQ RANGE	8/8/2019	DM
	5	UPDATED FREQ RANGE	4/23/2025	DM

SPECIFICATION:

FREQUENCY RANGE: 150-6000MHz
PASSIVE INTERMODULATION: -160dBc @1900MHz with 2x20W
RETURN LOSS: 25dB MIN 150-960MHz
23dB MIN 960-2700MHz
20dB MIN 2700-4000MHz
17dB MIN 4000-6000MHz
POWER: 0-200W
WEIGHT: 16.8lbs
CONNECTOR: 7-16 DIN(f)

NOTE: 2W 50Ω DC TERMINATION INCLUDED ON OUTPUT PORT

DRAWN marekant	11/8/2011	 R&D Microwaves LLC, USA		
CHECKED				
QA		TITLE LOW PIM TERMINATION, MODEL # AT-A17		
MFG				
APPROVED		SIZE B	DWG NO AT-A17-OLrev5	REV 5
		SCALE	SHEET 1 OF 1	