


DESCRIPTION:

PMI model number CL15D62-300-CD-SFF is a Combine filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	ORIGINAL RELEASE	6/20/00	

SPECIFICATIONS:

- CENTER FREQUENCY: 15.62 GHz
- 3dB BANDWIDTH: 300 MHz
- VSWR IN THE PASS BAND: 1.5:1 MAX.
- INSERTION LOSS (PASSBAND) <= -4 dB MAX.
- REJECTION FROM DC TO 15.32 GHz: -40 dB
- REJECTION FROM 15.92 TO 40 GHz: -40 dB

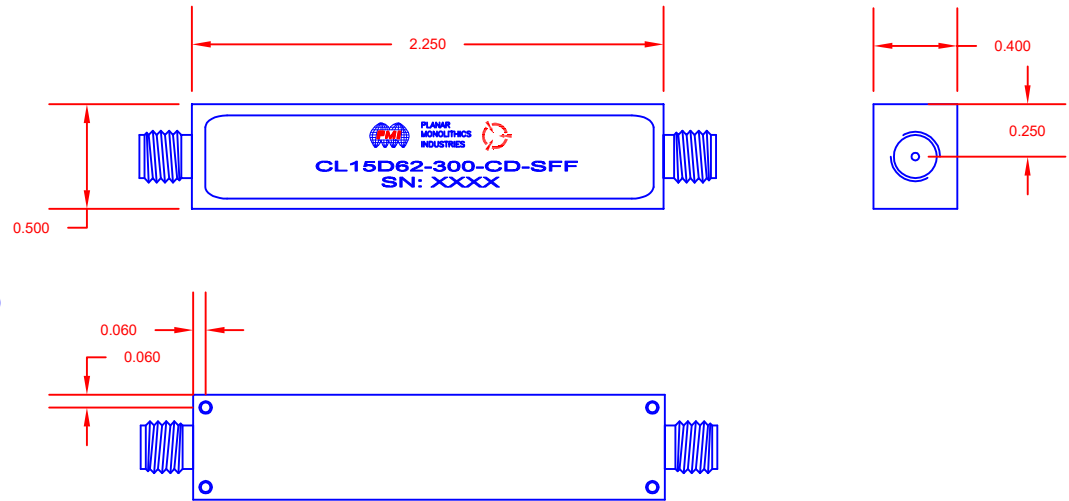


- CONNECTORS: SMA FEMALE CONNECTORS
- SIZE 2.25" (L) x 0.40" (W) x 0.50" (H)
- WEIGHT 1 OZ. TYP.

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
 -65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 213B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

ALL DIMENSIONS ARE IN INCHES
 TOLERANCES:
 X.XX ±0.010
 X.XXX ±0.005

PART NO. PF60-248		 PLANAR MONOLITHICS INDUSTRIES 7311-F GROVE RD FREDERICK, MARYLAND			
APPROVALS	DATE	TITLE			
DRAWN S. PALACIO	6/20/00	OUTLINE DRAWING CL15D62-300-CD-SFF			
CHECKED		SIZE	FSCM NO.	DWG NO.	REV.
ISSUED		A	1QJWO	155-0315	-
		SCALE	SHEET		1 OF 1
		N/A			

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION