


DESCRIPTION:

PMI MODEL NUMBER DD-10M12D4G-RAD-MF IS A 10 MHz TO 12.4 GHz DIODE DETECTOR FEATURING 500 mV/mW SENSITIVITY, NEGATIVE POLARITY, AND A NOTABLY FLAT FREQUENCY RESPONSE.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	06/15/26	

SPECIFICATIONS:

- FREQUENCY: 0.01 GHz TO 12.4 GHz
- VSWR: 1.4:1 TYP
1.6:1 MAX
- FREQUENCY FLATNESS: ±0.25 dB TYP
±0.3 dB MAX
- INPUT POWER: +20 dBm MAX
- SENSITIVITY: 500 mV/mW MIN
- POLARITY: NEGATIVE
- RF CONNECTORS (IN/OUT): 2.92 mm (MALE/FEMALE)
- FINISH: ALBALOY PLATED

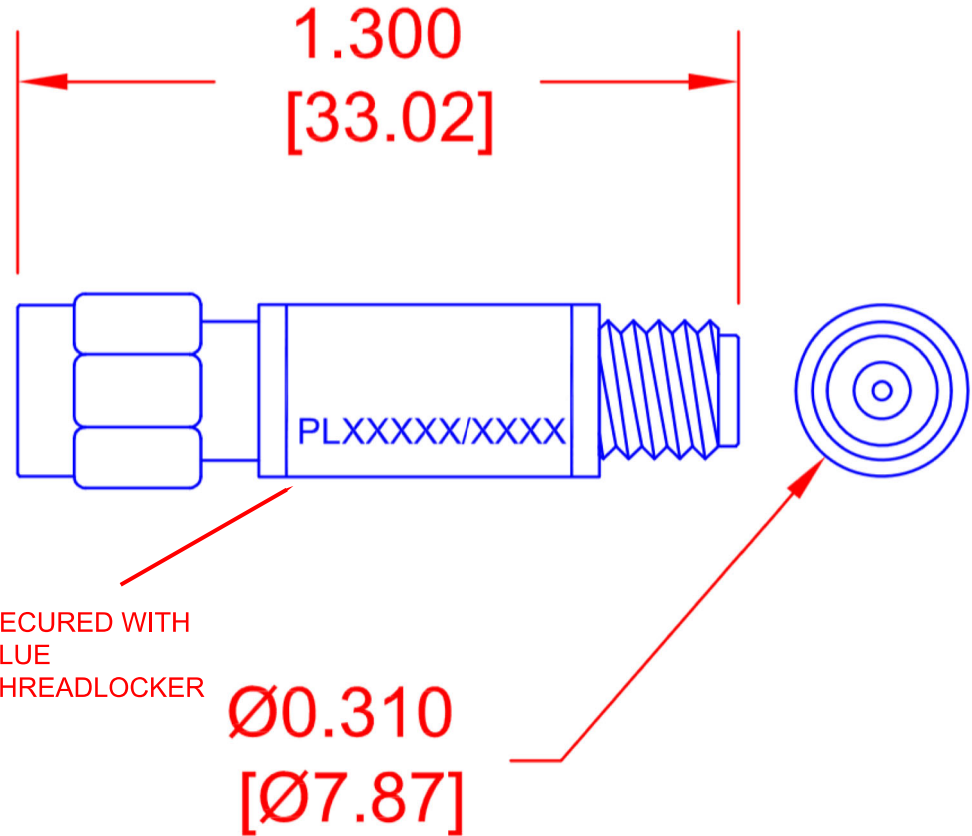

ENVIRONMENTAL RATINGS

- **TEMPERATURE:** -54°C TO +100°C (OPERATING)
-65°C TO +100°C (STORAGE)
- **HUMIDITY:** MIL-STD-202, METHOD 103 COND. B
- **SHOCK:** MIL-STD-202, METHOD 213 COND. B
- **VIBRATION:** MIL-STD-202, METHOD 204 COND. B
- **ALTITUDE:** MIL-STD-202, METHOD 105 COND. B
- **TEMPERATURE CYCLE:** MIL-STD-202, METHOD 107 COND. A

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7309-A GROVE ROAD
 FREDERICK, MARYLAND 21704 USA
 TEL: 301-662-5019 FAX: 301-662-1731
 WEBSITE: www.pmi-rf.com
 E-MAIL: sales@pmi-rf.com
 ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN AG		06/15/26	PRODUCT FEATURE DD-10M12D4G-RAD-MF		
CHECKED			SIZE A	FSCM NO. 05XQ0	DWG NO. PRELIMINARY
ISSUED			SCALE N:S		REV. -
					SHEET 1 OF 1

ALL DIMENSIONS ARE IN INCHES
 TOLERANCES:
 X.XX ±0.020
 X.XXX ±0.010
 WEIGHT: 2.75 oz.

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
 NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION