

DESCRIPTION:

PMI MODEL NUMBER DD-8G18G-P-RAD-MF-ROHS IS A 8 TO 18 GHz DIODE
DETECTOR FEATURING 1600 mV/mW SENSITIVITY, 23 dBm POWER HANDLING, AND
POSITIVE OUTPUT POLARITY.

SPECIFICATIONS:

- FREQUENCY: 8 GHz TO 18 GHz
- VOLTAGE SENSITIVITY: 1600 mV/mW TYP
- FLATNESS: ±0.7 dB TYP
- INPUT POWER: +23 dBm MAX
- OUTPUT POLARITY: POSITIVE
- RF CONNECTORS: 2.92 mm (MALE/FEMALE)
- FINISH: ALBALOY PLATED
- ROHS/REACH: COMPLIANT


ENVIRONMENTAL RATINGS

- TEMPERATURE: -55°C TO +125°C (OPERATING)
..... -65°C TO +150°C (STORAGE)
- HUMIDITY: MIL-STD-202, METHOD 103 COND. B
- SHOCK: MIL-STD-202, METHOD 213 COND. B
- VIBRATION: MIL-STD-202, METHOD 204 COND. B
- ALTITUDE: MIL-STD-202, METHOD 105 COND. B
- TEMPERATURE CYCLE: MIL-STD-202, METHOD 107 COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010
WEIGHT: 2.75 oz.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	07/22/26	

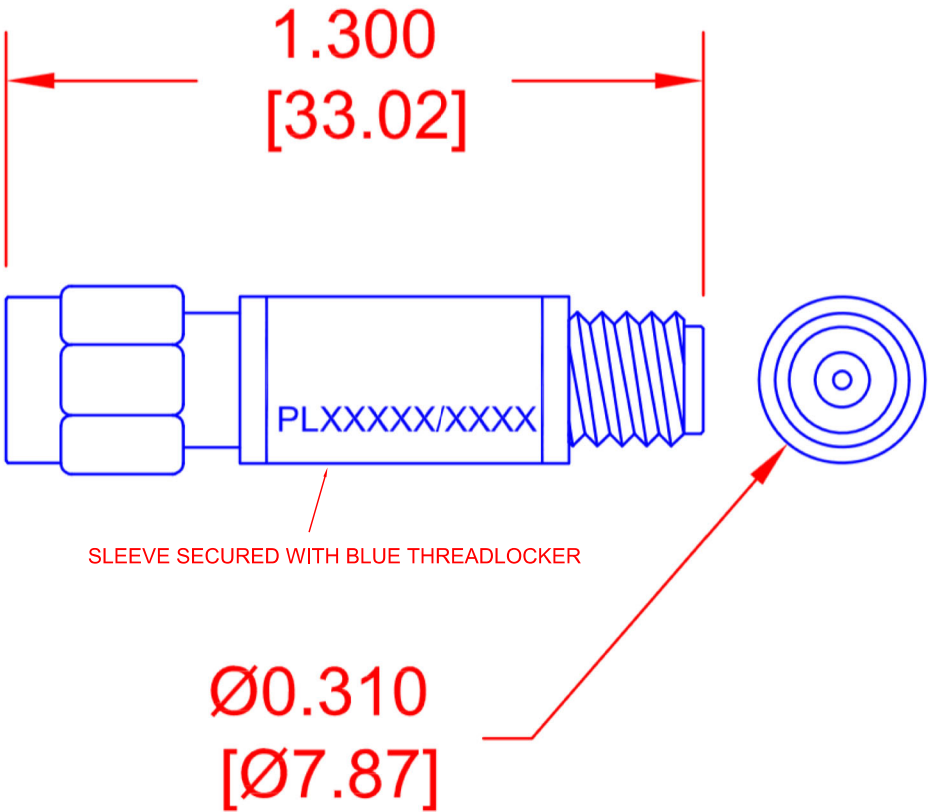

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.
7309-A GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN		AG	PRODUCT FEATURE			
CHECKED			DD-8G18G-P-RAD-MF-ROHS			
ISSUED			SIZE	FSCM NO.	DWG NO.	REV.
			A	05XQ0		-
			PRELIMINARY			
			SCALE	N:S	SHEET	1 OF 1