



**SUMMARY TEST
ON
DD-10M12D4G-RAD-MF-ROHS**

Customer: _____
 SO No: _____
 Model No: DD-10M12D4G-RAD-MF-ROHS
 Serial No: Demo - PMI

Tested By: Alfredo Lopez
 Temperature: +25°C
 Date: 6/10/2026
 Drawing No: _____ Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Operating Frequency:	10 MHz to 12.4 GHz	10 MHz to 12.4 GHz	
2	Input VSWR:	1.4:1 Typ. 1.6:1 Max.	1.53 :1 See Graph	
3	Video Output Polarity:	NEGATIVE	NEGATIVE	
4	Flatness: (Square Law Region)	±0.25 dB Typ. ±0.3 dB Max.	±0.3 dB See Graph	
5	Voltage Sensitivity:	500 mV/mW Min.	614.8 mV/mW See Graph	
6	Maximum Input Power:	+20 dBm Max.	Pass +20 dBm See Graphs	
7	Dynamic Range:	-30 to +20 dBm	Pass See Graphs	





QA/QC Approval: _____

Date: _____





7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com








SUMMARY TEST ON DD-10M12D4G-RAD-MF-ROHS

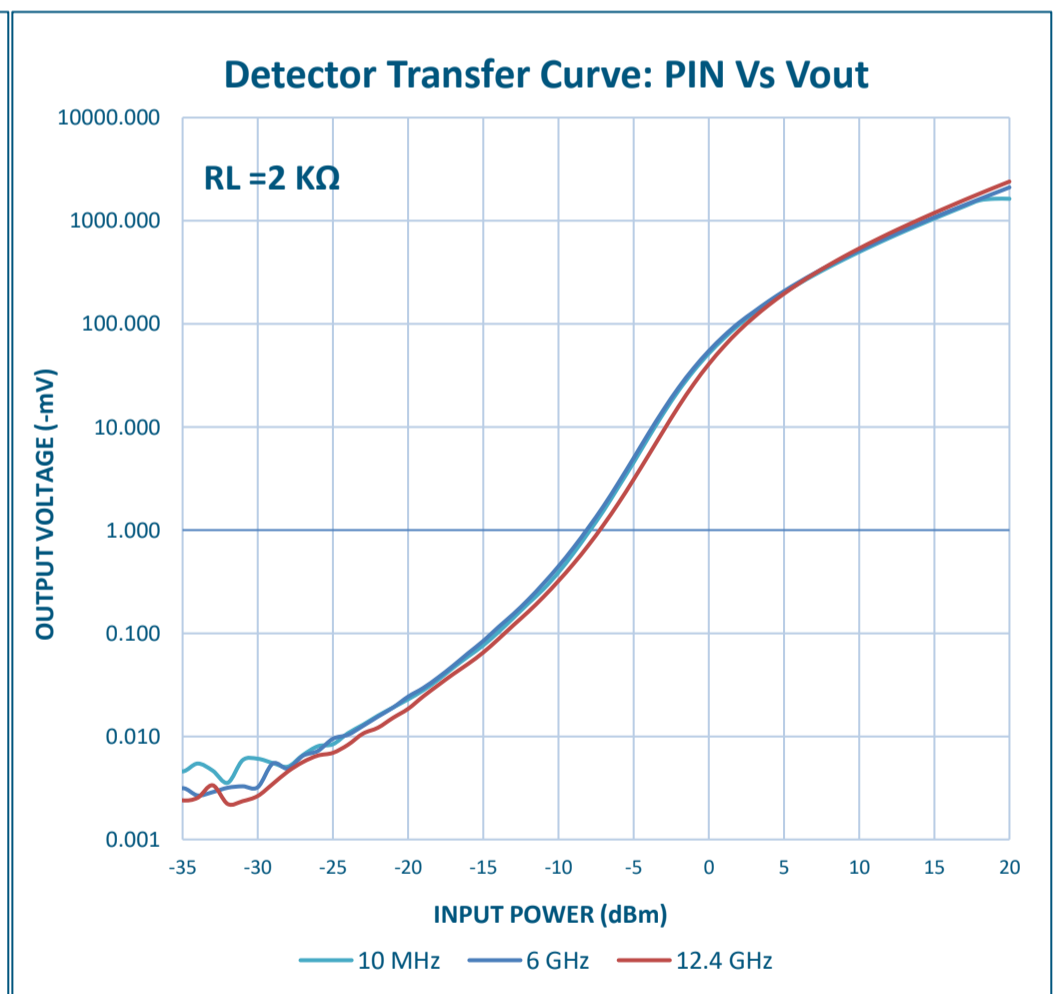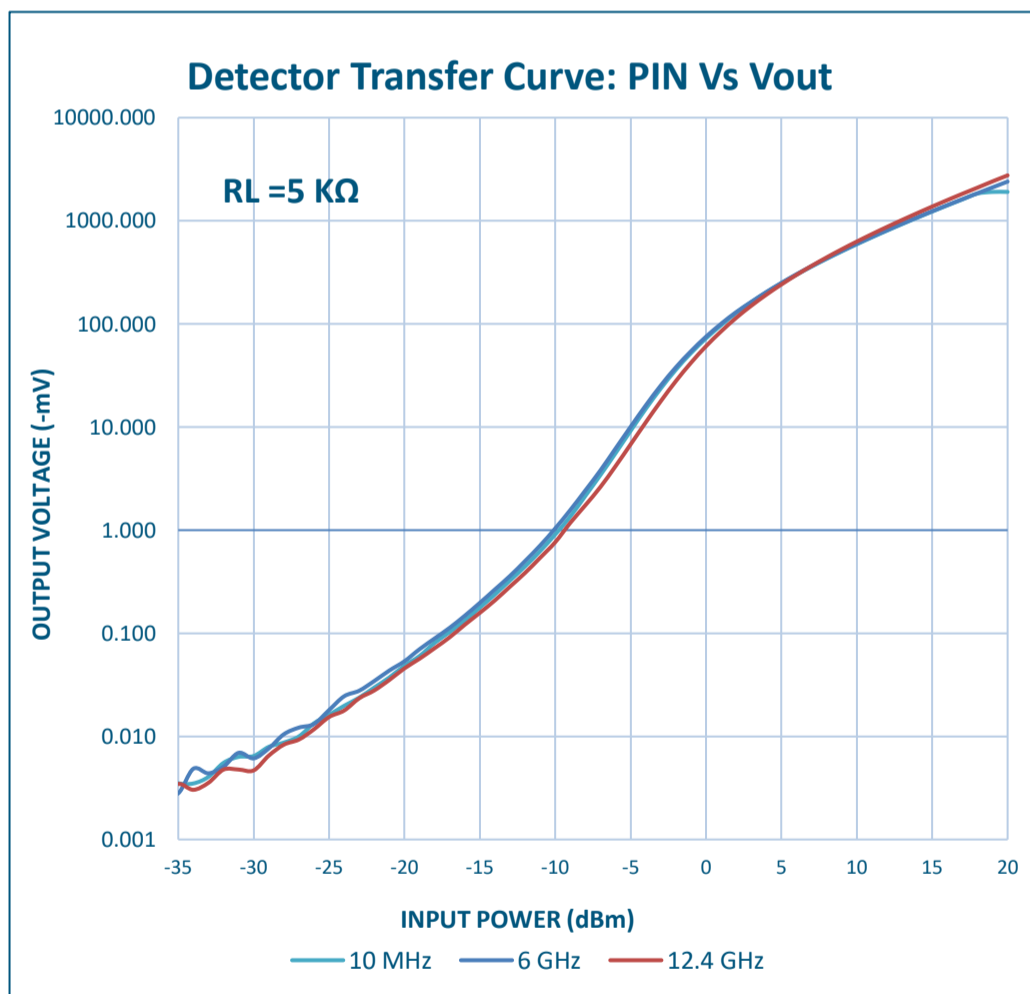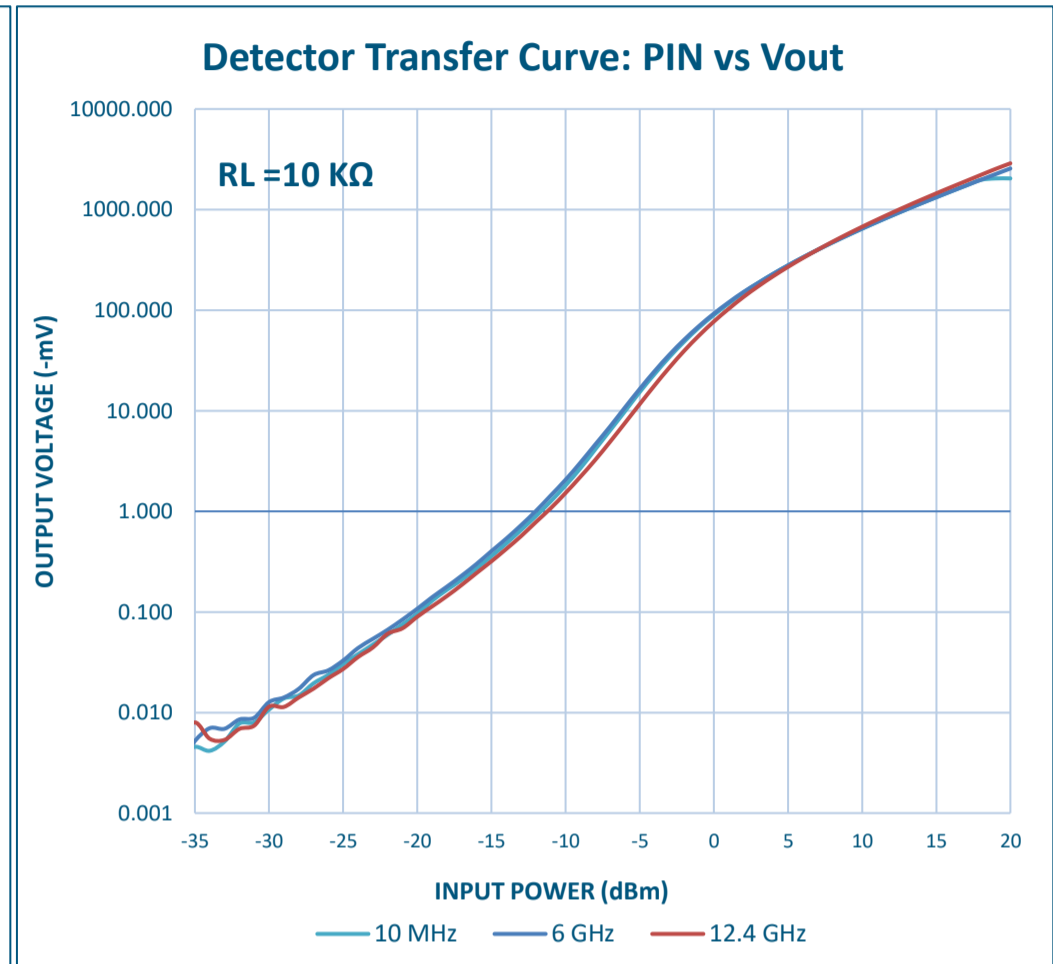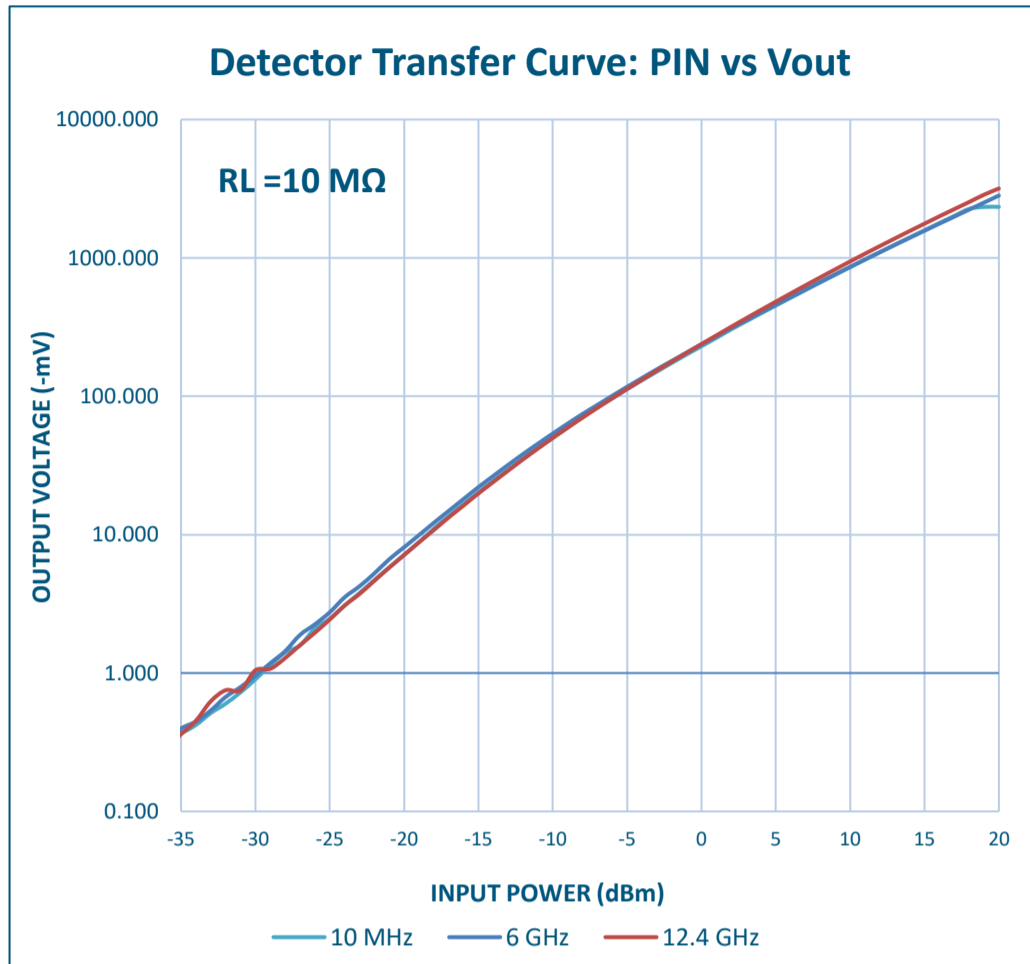

SUMMARY TEST ON DD-10M12D4G-RAD-MF-ROHS

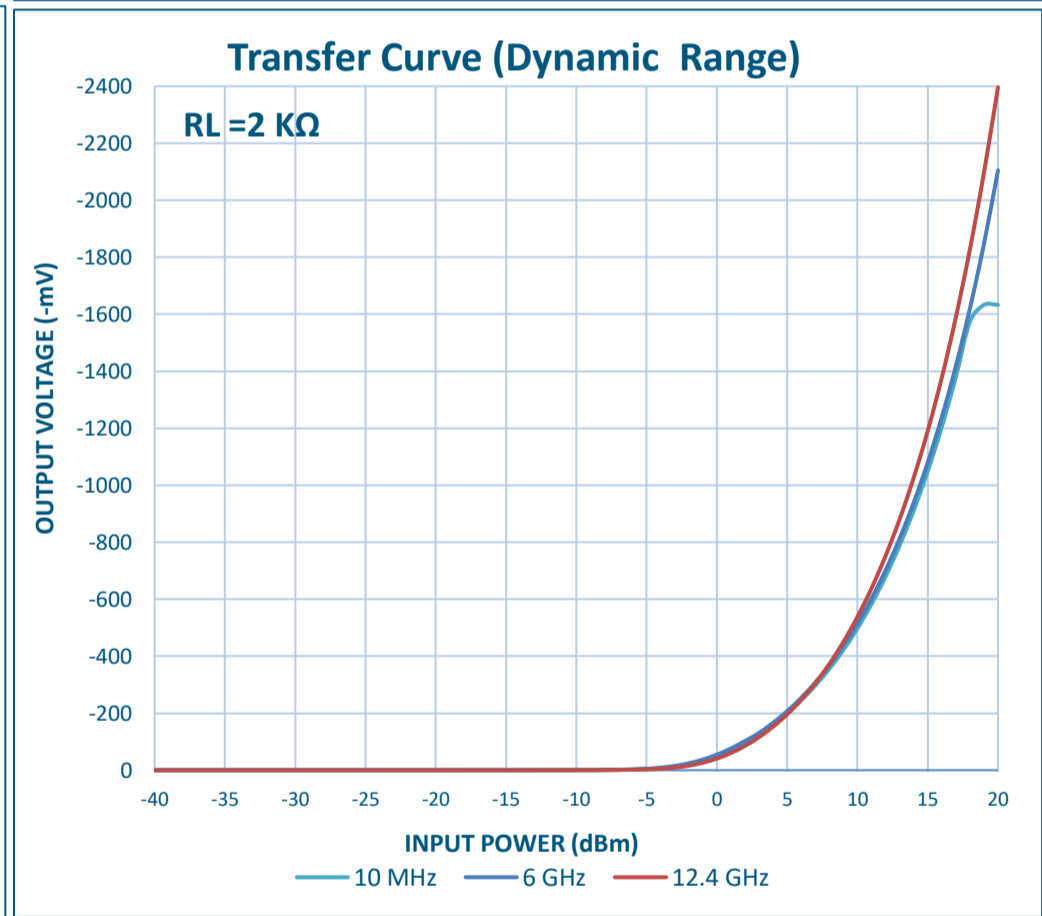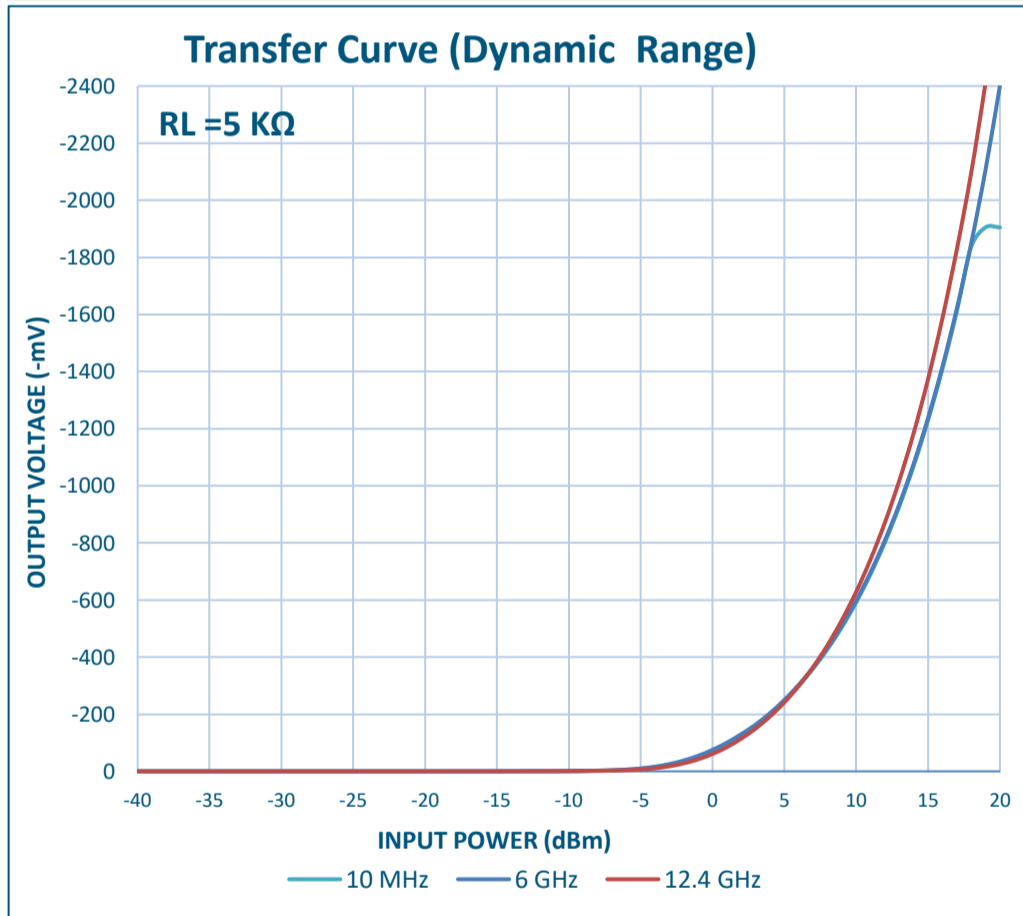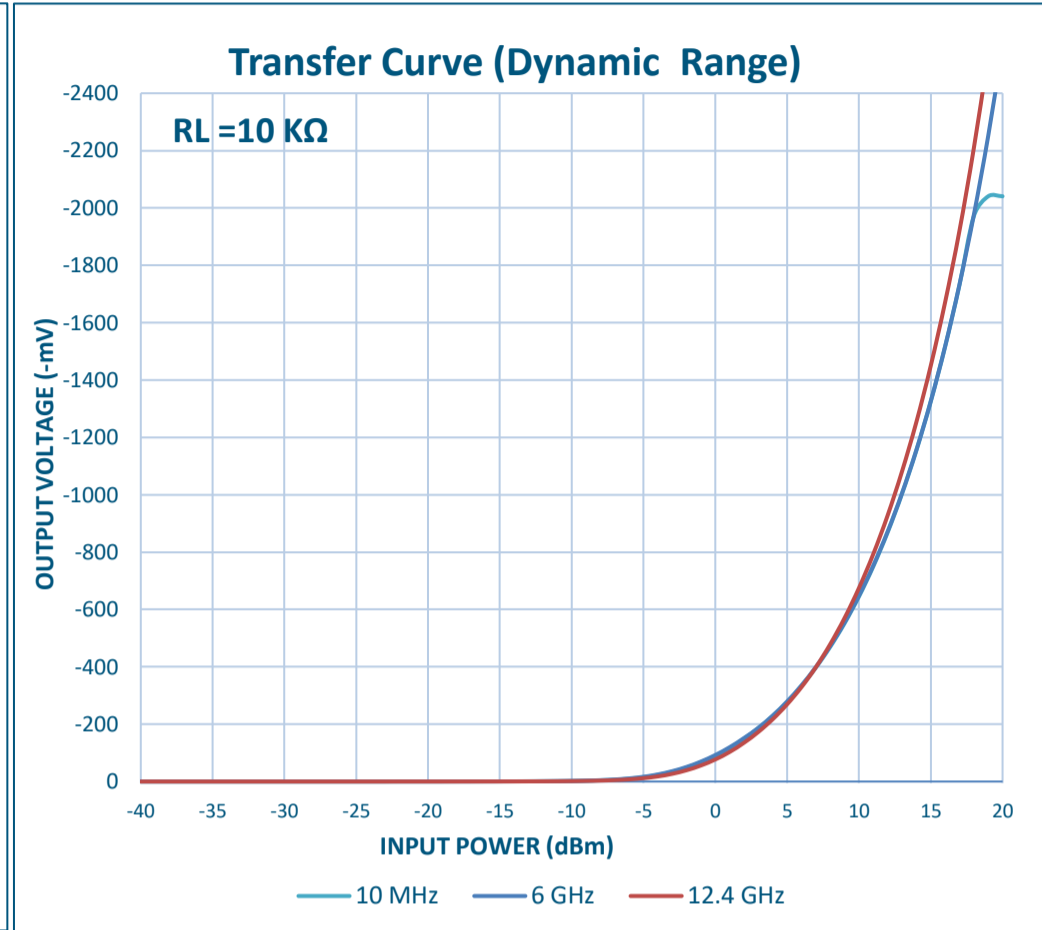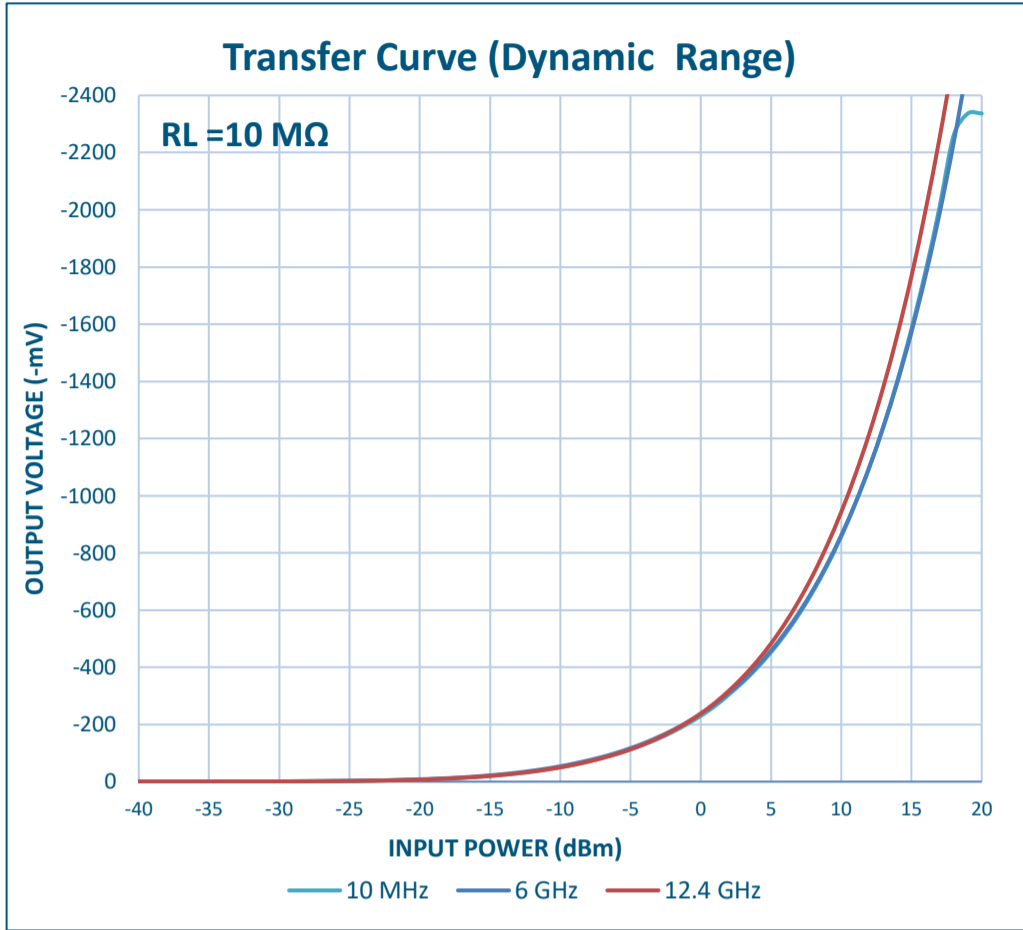

SUMMARY TEST ON DD-10M12D4G-RAD-MF-ROHS

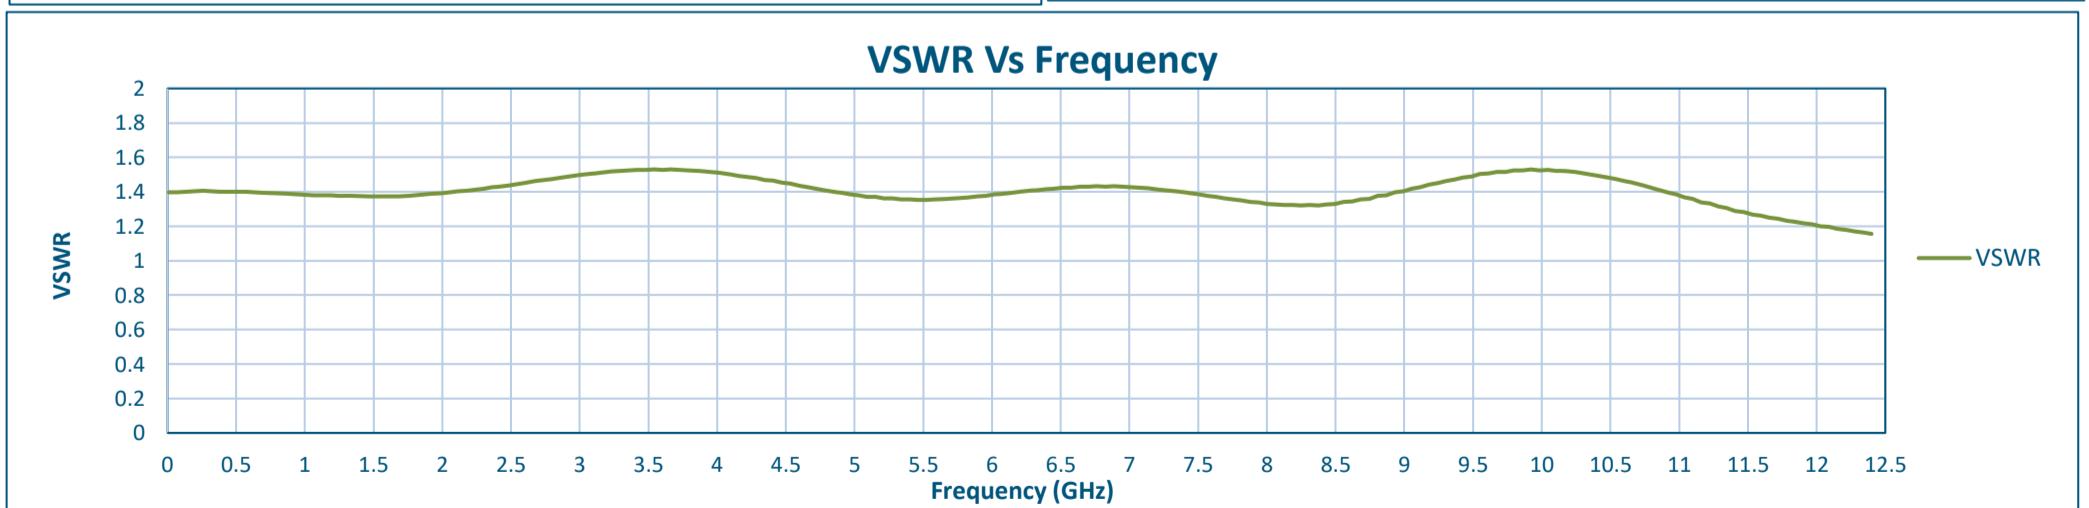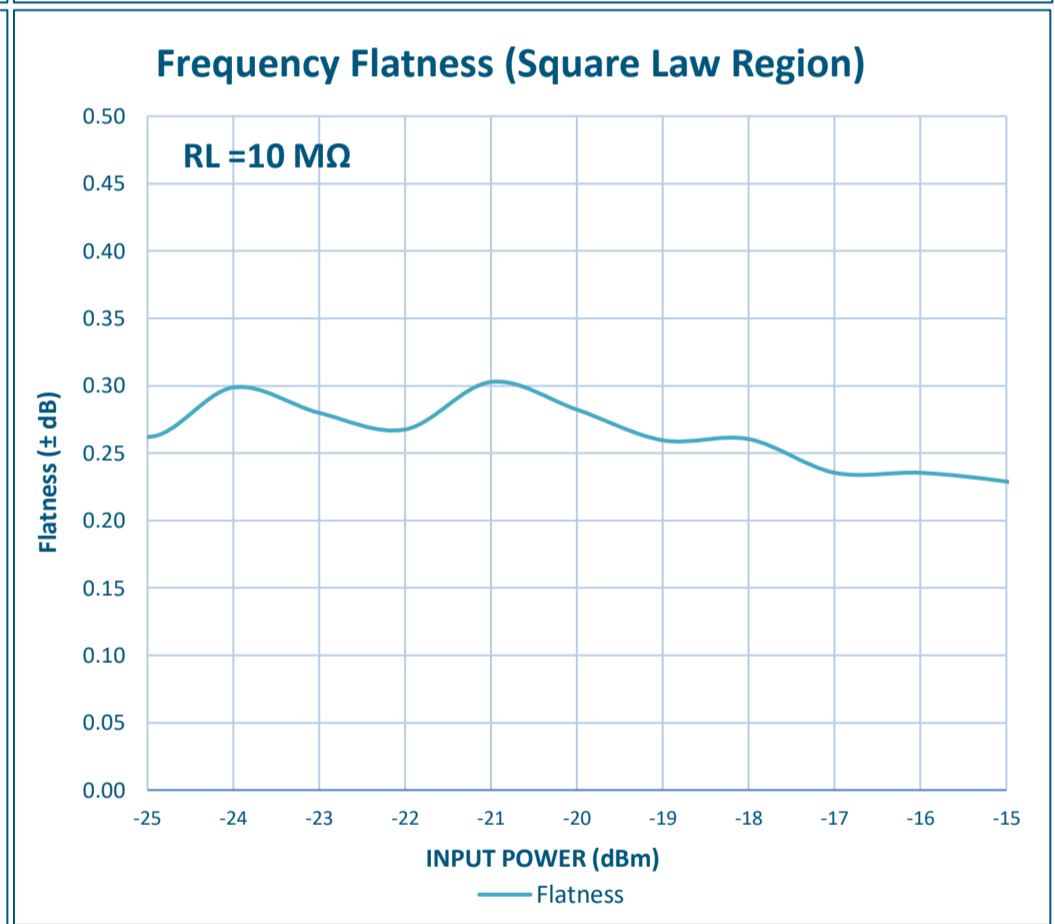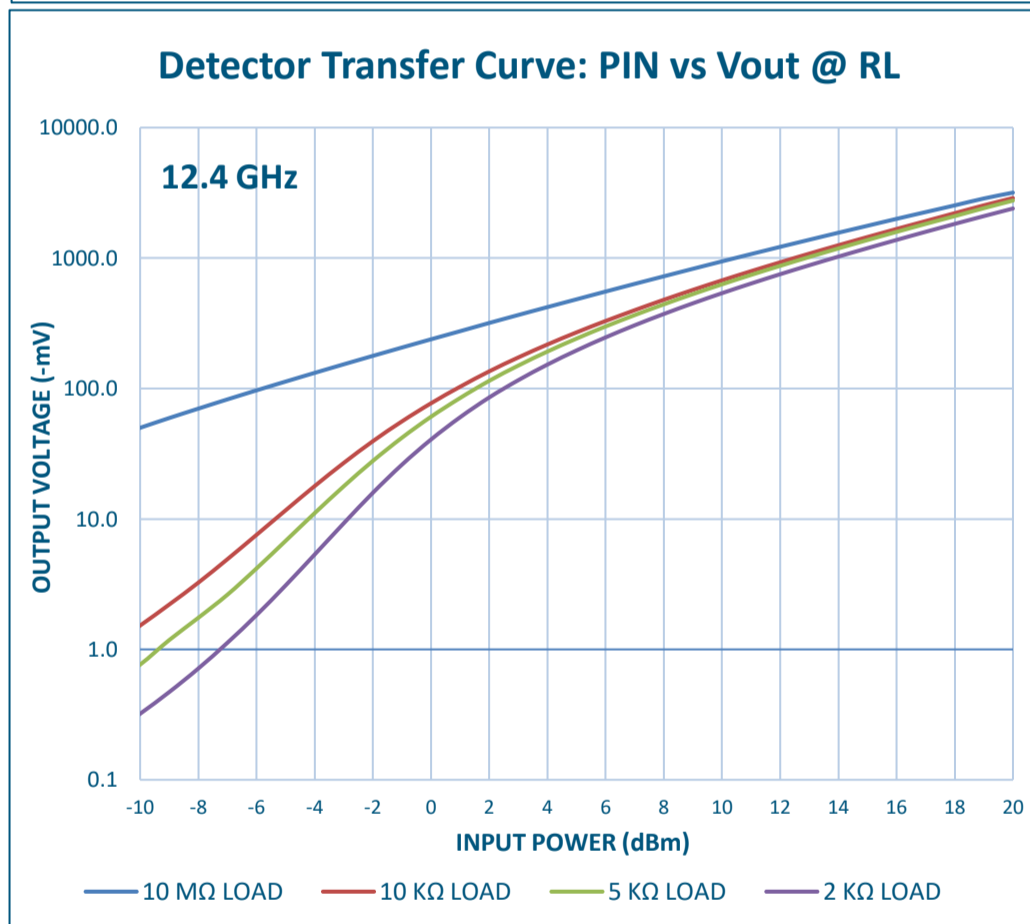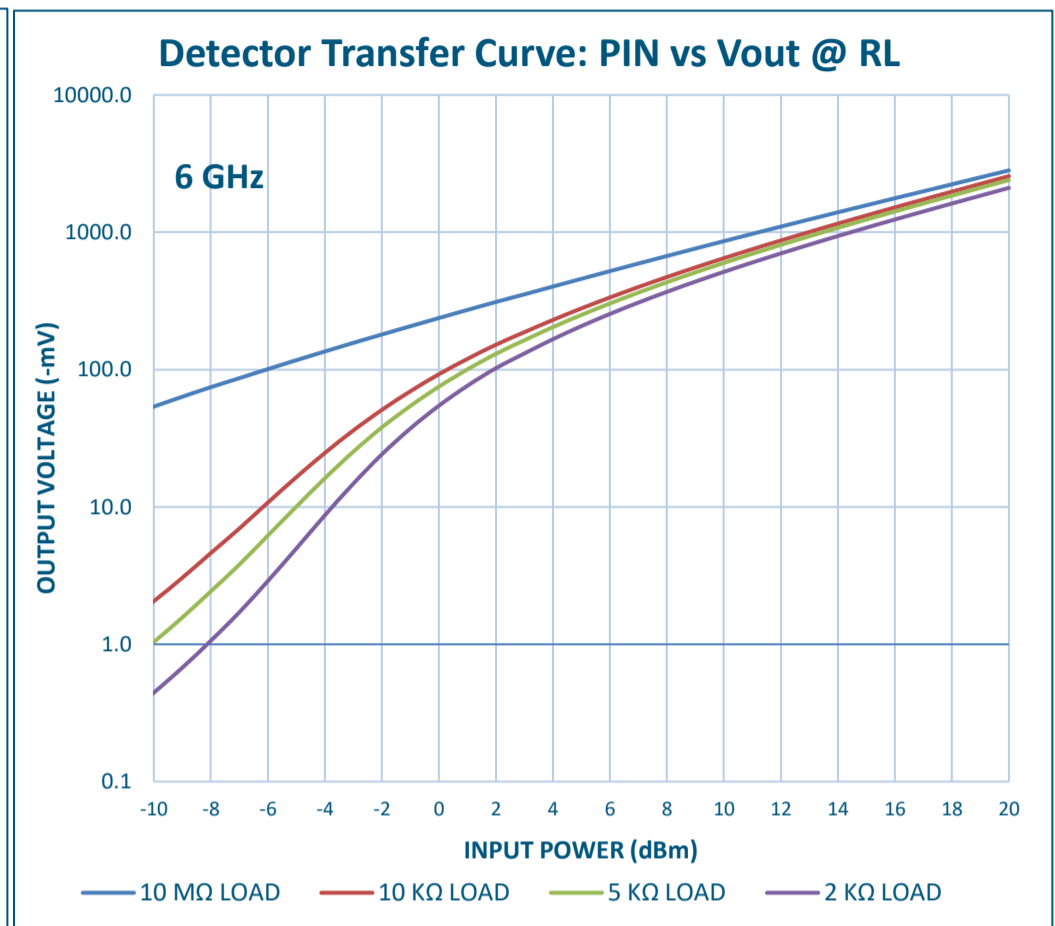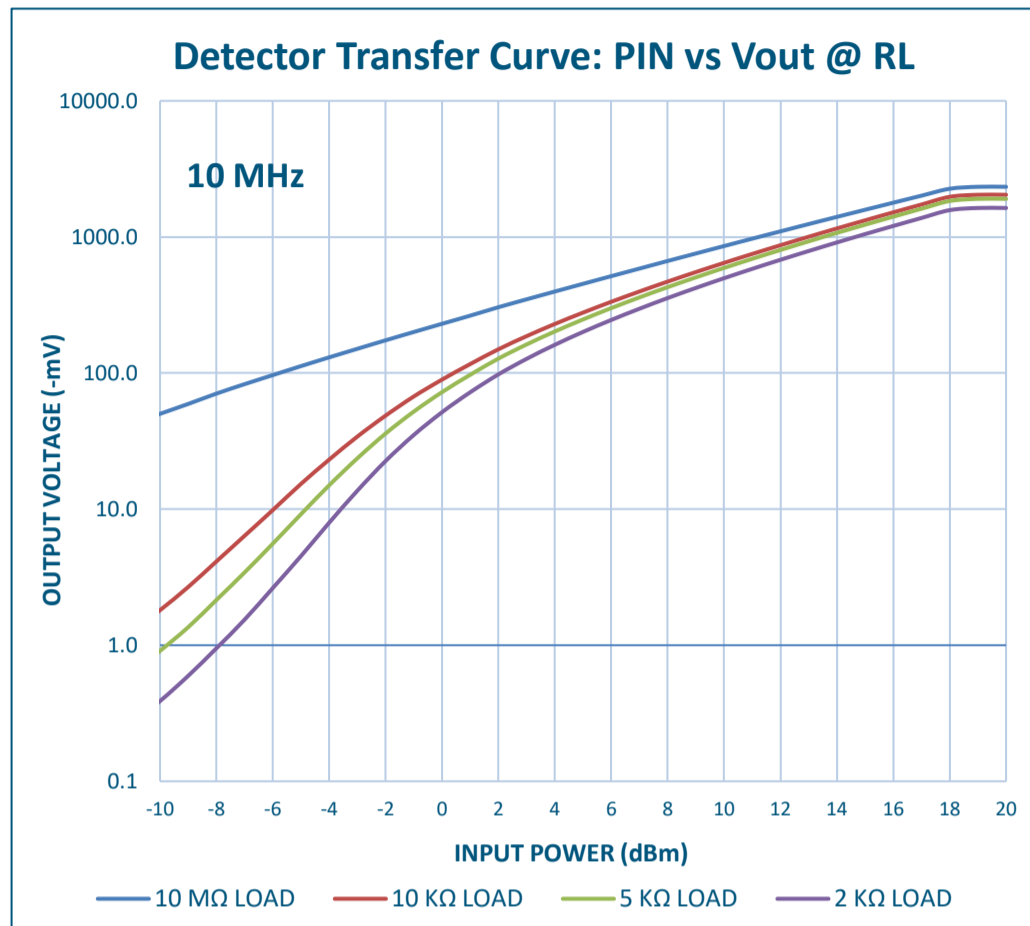

SUMMARY TEST ON DD-10M12D4G-RAD-MF-ROHS

Rise & Fall Time


Input Power 0dBm
100 ns PW, 25% Duty Cycle

Rise time - 3.69 ns
Fall Time - 1.90 ns



Full Pulse

Input Power 0dBm
100 ns PW, 25% Duty Cycle

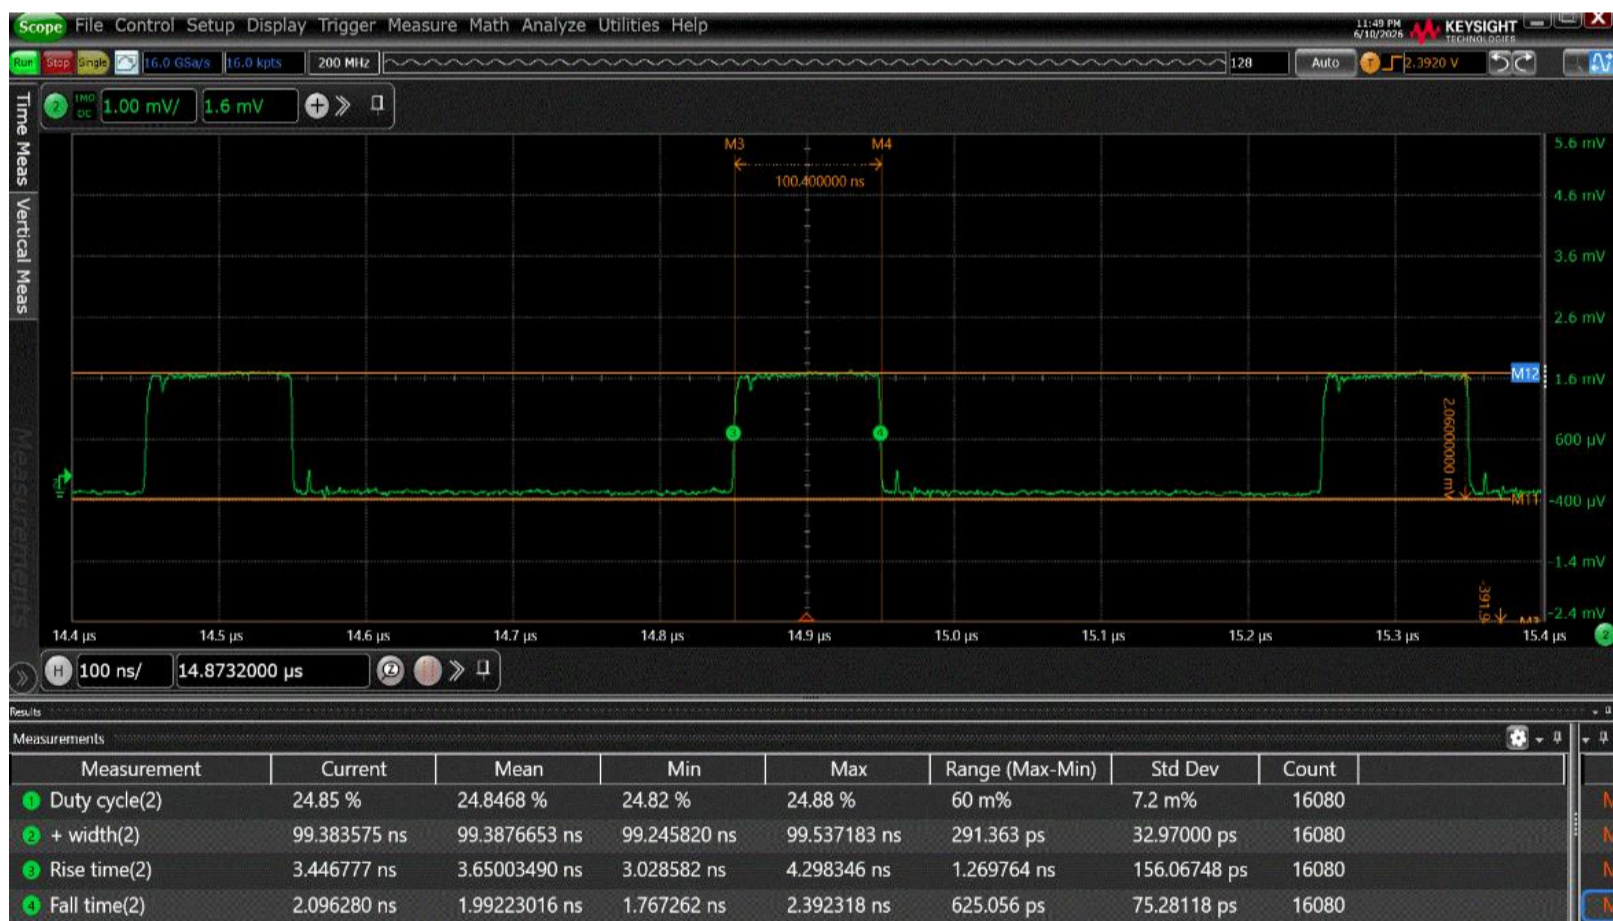




SUMMARY TEST ON DD-10M12D4G-RAD-MF-ROHS

Rise & Fall Time


Input Power 0dBm
1 μ s PW, 25% Duty Cycle

Rise time - 3.65 ns
Fall Time - 2.1 ns

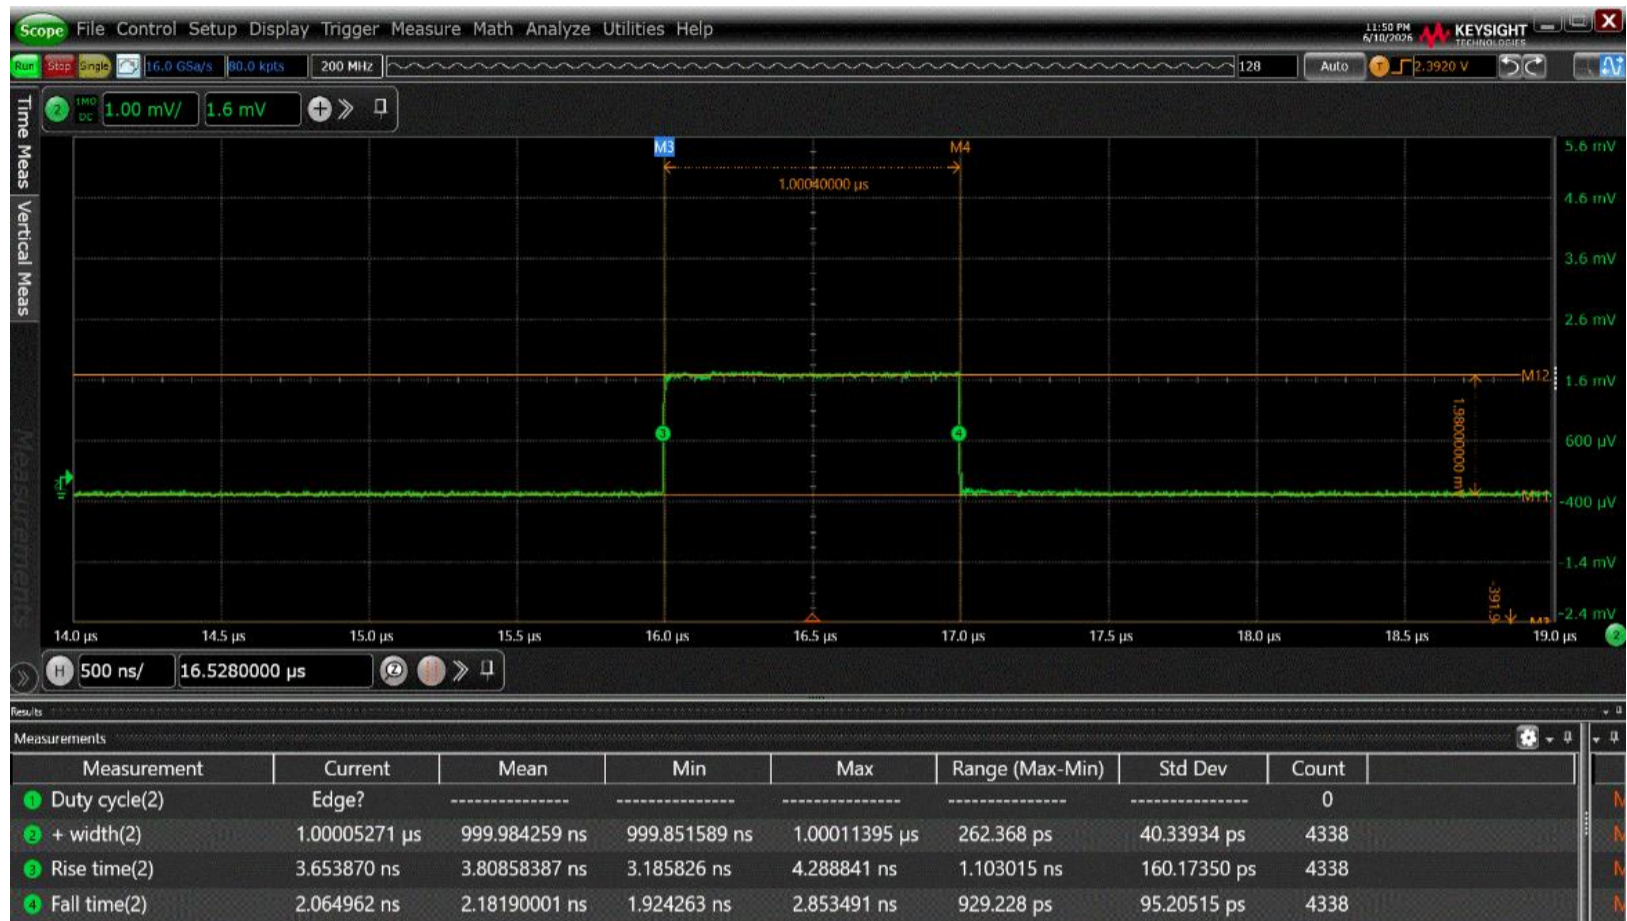

Full Pulse

Input Power 0dBm
1 μ s PW, 25% Duty Cycle

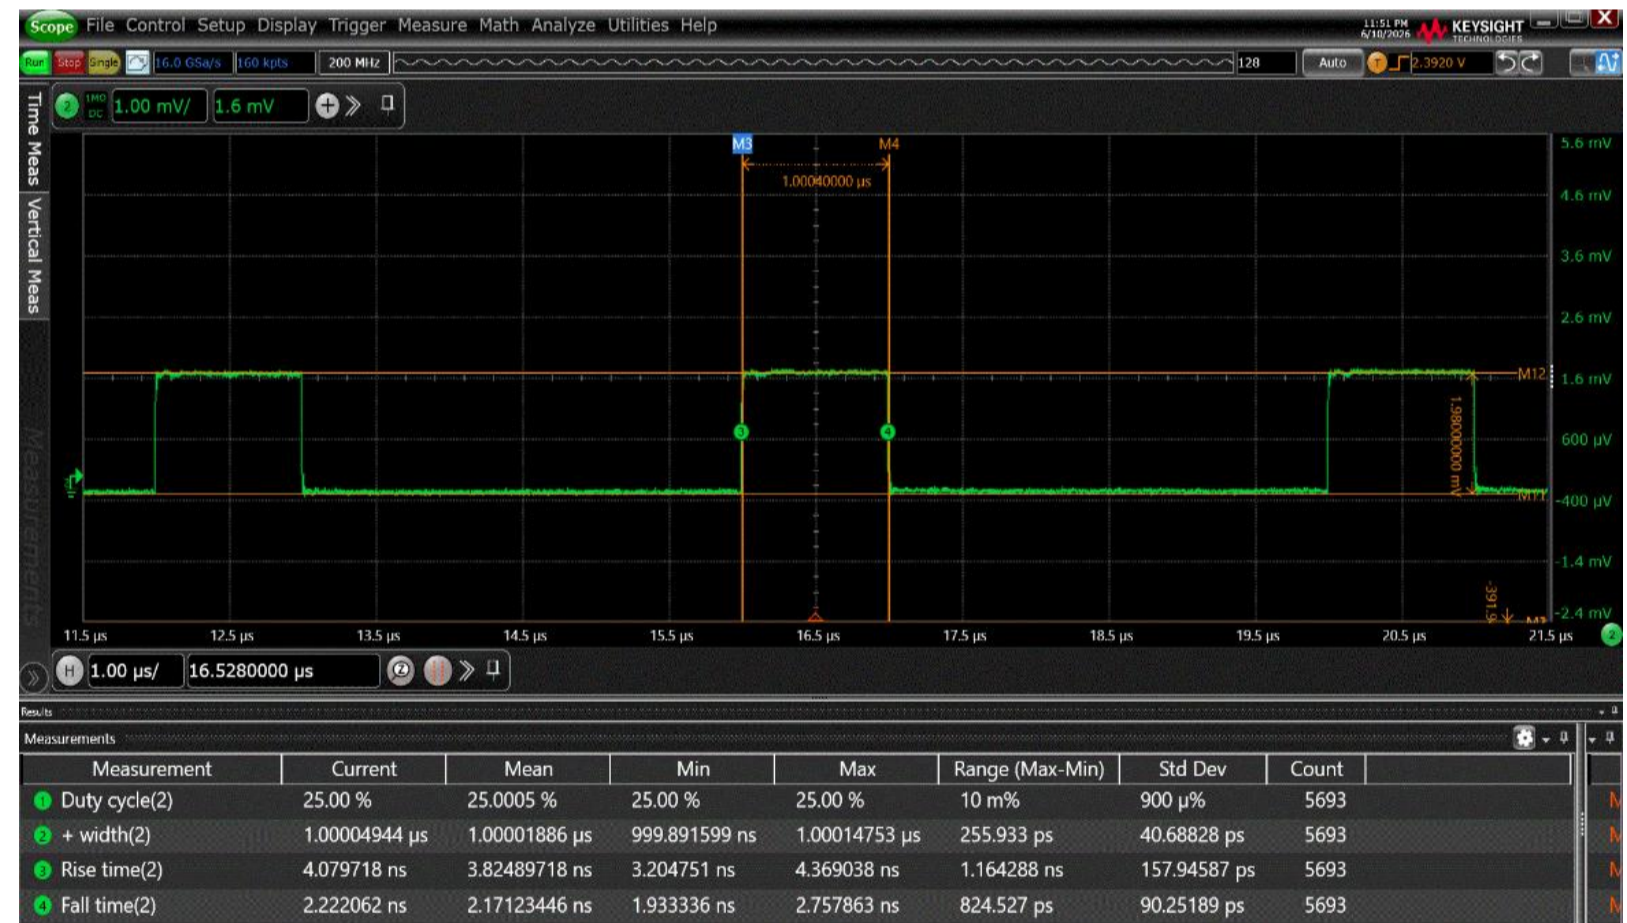

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com