

Hybrid Wet Tantalum

TDE

Series



- 1.4" x 1.4" square base
- Heights range from 0.312" – 0.755"
- Voltages range from 60V-110V
- Cap values range from 2,200µF – 25,000µF
- Temperature range of -55°C to 125°C
- Standard tolerance ±20% (±10% available)
- Stud mount options available

Product Overview

The TDE series capacitors utilize sintered tantalum anodes and ruthenium oxide coated cathodes operating in aqueous electrolyte. The components are hermetically sealed in a welded tantalum case with a glass to metal seal.

The TDE series capacitors come in a 1.4" x 1.4" square case and has the highest power density of any tantalum capacitor technology.

Electrical	Physical
<p>Rated Voltage Range 60VDC to 110VDC</p> <p>Capacitance Range 2,200µF to 25,000µF</p> <p>Life (@ 85°C) >2000 hours @ Rated Voltage</p>	<p>Solderability To ANSI J-STD-002</p> <p>Operating Temperature Range -55°C to +85°C or 125°C with voltage derating (see page 3)</p> <p>Storage Temperature Range - 62°C to +130°C</p>

Mechanical			
Test	Method	Condition	Remarks
Shock	MIL-STD-202 METHOD 213	G	11 ms, 50G
Vibration	MIL-STD-202 METHOD 204	D	12 sweeps/axis, 20G peak
	MIL-STD-202 METHOD 214	II, Letter E	1.5 hours/axis, 19.64G rms
Moisture Resistance	MIL-STD-202 METHOD 106		6V bias

Capacitor Life

TDE series capacitors are rated for >2,000 hours at 85°C and rated voltage or 125°C at derated voltage. The effective life of a capacitor in a given application is based on the specific operating voltage and average temperature.

TDE series Capacitors have an unlimited Shelf life.

Environmental Compliance

Standard TDE ratings are not RoHS compliant. TDE ratings are REACH compliant.

- Negative terminal is 60/40 SnPb plated copper wire
- Positive Terminal is 60/40 SnPb plated Nickel Tube
- Lead free RoHS compliant options available upon request

Handling Guidelines

Attachment / Mounting by leads only is discouraged in applications exposed to mechanical shock or vibration. Always ensure capacitor is firmly secured to PWB, by either mounting studs, epoxy staking or both (preferred for vibration environments). In severe shock and vibration environments full potting is preferred.

Provide adequate care to protect the glass to metal seal (GTMS)

- Avoid forces on the positive terminal, lateral, axial or torque.
- Avoid mechanical shock to the positive terminal.
- Secure the part to PWB before soldering

Mounting with studs

- #2-56 CDA 752 studs are available as a standard option.
- Use spacers (provided) to fill the gap between PWB and leaded surface of capacitor.
- Tighten Studs to 30-40 in oz.
- Secure nuts (provided) with red Loctite. Do not use lock washers.

Potting / Epoxy Staking

- We advise epoxy staking capacitor to PWB even when using studs, for maximum vibration tolerance.
- In some applications it may be advisable to pot the cavity between the PWB and leaded surface.
- Highest shock/vibration applications may require the capacitor to be fully potted.

Soldering

- Rim of capacitor is intended to mate directly to PWB. Advise using "no-clean" flux.
- Use through-hole soldering methods in accordance with ANSI/IPC J-STD-001.

Lead trimming

- Provide adequate care if leads must be trimmed.
- Trimming of the positive terminal is risky and highly discouraged.
- Positive lead lengths available in 1/32" increments from 0.125" when measured from the rim of the capacitor.

Part Number Description

Product Series	Voltage Rating	Cap Rating	Option: Custom Center Lead	Option: ±10% Rating	Option: Lead Free	Option: Stud Mount
TDE#	XXX	XXX	LX	K	LF	SMXX

Ratings Table

Part Number	Voltage_85°C	Voltage_125°C	Cap (µF)	ESR (mΩ)	Height (in)	Mass (g)
TDE1060632	60	36	6.300	50	0.312	60.00
TDE1075442	75	45	4.400	55	0.312	60.00
TDE1100262	100	60	2.600	65	0.312	60.00
TDE1110222	110	66	2.200	85	0.312	60.00
TDE2060133	60	36	12.600	25	0.45	86.00
TDE2075882	75	45	8.800	27	0.45	86.00
TDE2100522	100	60	5.200	30	0.45	86.00
TDE2110442	110	66	4.400	40	0.45	86.00
TDE3060193	60	36	19.000	17	0.6	115.00
TDE3075133	75	45	13.000	18	0.6	115.00
TDE3100782	100	60	7.800	20	0.6	115.00
TDE3110662	110	66	6.600	27	0.6	115.00
TDE4060253	60	36	25.000	15	0.755	145.00
TDE4075183	75	45	18.000	15	0.755	145.00
TDE4100103	100	60	10.400	15	0.755	145.00
TDE4110882	110	66	8.800	20	0.755	150.00

2D Drawings

	TDE1	TDE2	TDE3	TDE4
Case Height (H)	0.312"	0.450"	0.600"	0.755"

* If unspecified, standard center lead length is 0.230+/-0.030"
L(x) dimensions are +/-0.010"



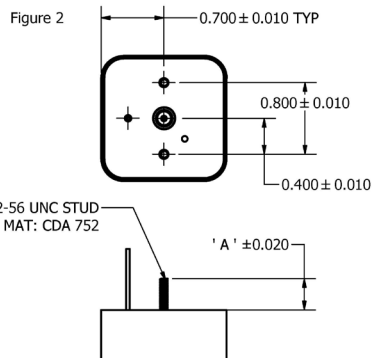


Table 3

OPTIONAL STUD MOUNT	
PART NUMBERS	STUD LENGTH ('A')
TDE#XXXXXXXXSM00	0.21 INCH
TDE#XXXXXXXXSM01	0.27 INCH
TDE#XXXXXXXXSM02	0.40 INCH
TDE#XXXXXXXXSM03	0.15 INCH
TDE#XXXXXXXXSM04	0.18 INCH
TDE#XXXXXXXXSM05	0.35 INCH

Mounting Recommendation

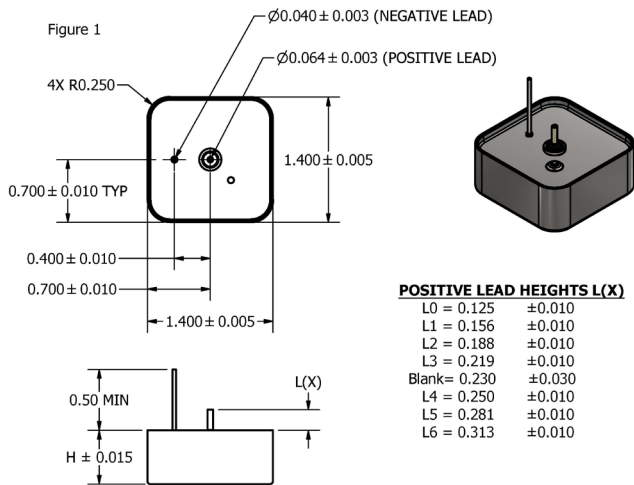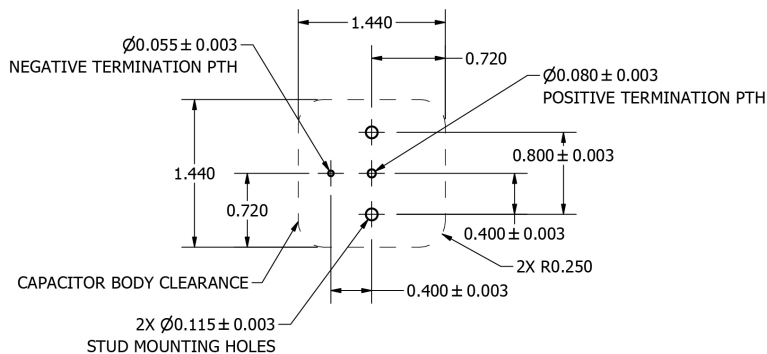

Evans GROUP **Trusted Brands. Single Source.**
Hi-Rel Capacitors for Mission Critical Systems.

Uniting four industry leaders—Evans, Paktron, UTC, and Eulex—Evans Group delivers the industry's most specialized and comprehensive capacitor portfolio. Together, we provide power-dense, high-reliability solutions engineered for mission-critical environments across defense, aerospace, energy, and advanced RF systems.

Product specifications and technical documentation are provided for informational purposes only, are subject to change without notice, and do not create any warranty except as expressly set forth in the applicable Terms and Conditions of Sale.

Evans
72 Boyd Avenue E. Providence, RI 02914

T +1 401.435.3555
E evans@evans-group.com
URL www.evans-group.com/evans