




REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	ENGINEERING RELEASE	3/08/2016	AK

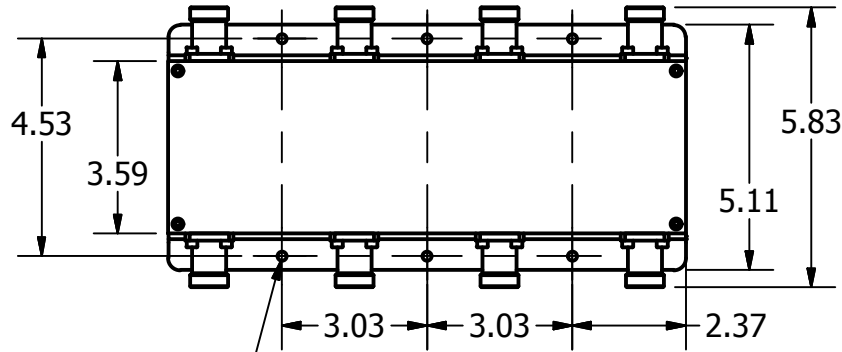


6X Ø.19 ∇ .06

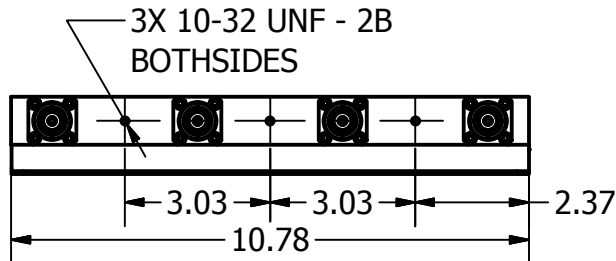

3X 10-32 UNF - 2B
BOTH SIDES

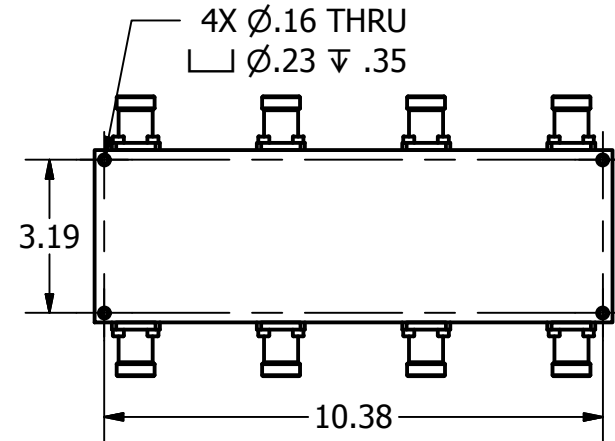

4X Ø.16 THRU
□ Ø.23 ∇ .35

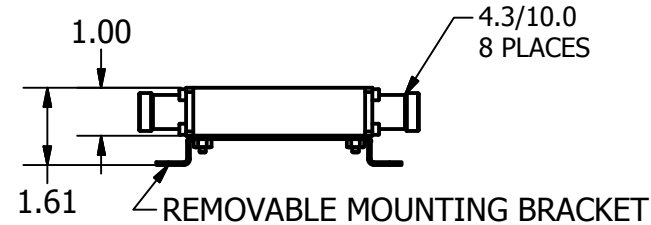

REMOVABLE MOUNTING BRACKET

SPECIFICATIONS:

FREQUENCY: 698-2700 MHz
ISOLATION: 23 dB
NOM. PATH LOSS: 6 dB
DISSIPATIVE LOSS: 0.7 dB
AMPLITUDE BALANCE, <2.4 GHz: 6.2±1.1 dB
>2.4 GHz: 6.2±1.3 dB
RETURN LOSS: 20 dB
POWER, EACH PORT: 100 WATTS
PIM(TESTED @1900 MHz): 161 dBc
FREQ. SENSITIVITY, 698-2400 MHz: ±1.1 dB
2400-2700 MHz: ±1.3 dB
ENVIRONMENTAL & OUTDOOR RATING: IP67
FINISH: CLEAR IRIDITE

UNLESS OTHERWISE SPECIFIED:
ALL UNITS ARE IN inches [mm]
ALL DIMENSIONS ARE NOMINAL

PROPERTY OF R&D MICROWAVES LLC

DRAWN AK	5/8/2015	 R&D Microwaves LLC, USA		
CHECKED				
QA		TITLE		
MFG		HM-A32D43 Outline Drawing		
APPROVED		SIZE A	DWG NO HM-A32D43-OLrev1	REV 1
		SCALE	SHEET 1 OF 1	