

DESCRIPTION

PMI MODEL: LNA-3D8G8D2G-26-13-15-SFF IS A LOW NOISE AMPLIFIER OPERATING OVER THE 3.8 TO 8.2 GHz FREQUENCY RANGE. THIS AMPLIFIER OFFERS A MINIMUM SIGNAL GAIN OF 26 dB LIMITING NOISE TO A MAXIMUM OF 4 dB. THE HOUSING IS OUTFITTED WITH FIELD REPLACEABLE SMA FEMALE CONNECTORS.

SPECIFICATIONS

- FREQUENCY RANGE: ----- 3.8 TO 8.2 GHz
- SMALL SIGNAL GAIN: ----- 26 dB MIN
30 dB MAX
- GAIN FLATNESS vs FREQUENCY: ----- ±1 dB MAX
- GAIN VARIATION OVER TEMPERATURE: - ±1 dB MAX
- NOISE FIGURE: ----- 4 dB MAX
- P1dB: ----- 13 dBm MIN
- VSWR (INPUT/OUTPUT): ----- 2.0:1 MAX
- MAXIMUM INPUT POWER: ----- +20 dBm CW MAX
- POWER SUPPLY: ----- +15±5% VDC @ 220 mA MAX
- CONNECTORS: ----- +V: SOLDER TERMINAL
RF: SMA FEMALE
- SIZE (EXCLUDING CONNECTORS): ----- 49.1mm x 20.3mm x 11.0mm
1.93" x 0.80" x 0.43"
- FINISH: ----- PAINTED BLUE

ENVIRONMENTAL RATINGS

- TEMPERATURE: ----- 0 °C TO +50 °C (OPERATING)
- HUMIDITY: ----- MIL-STD-202, METHOD 103B COND. B
- SHOCK: ----- MIL-STD-202, METHOD 213B COND. B
- VIBRATION: ----- MIL-STD-202, METHOD 204D COND. B
- ALTITUDE: ----- MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLING: ----- MIL-STD-202, METHOD 107A COND. A


NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS
HAVE A TOLERANCE
OF ±0.5mm [0.020"]

PMI CONFIDENTIAL AND PROPRIETARY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	08/11/17	

MECHANICAL OUTLINE

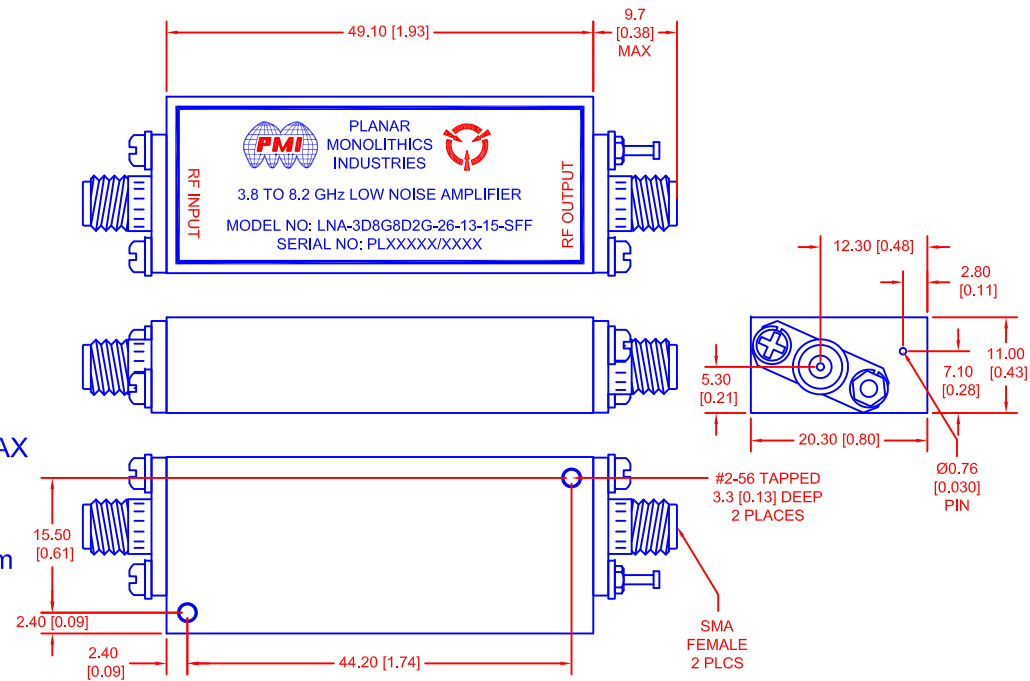

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN <i>M. Berry</i>		08/11/17	PRODUCT FEATURE LNA-3D8G8D2G-26-13-15-SFF 3.8 to 8.2 GHz Low Noise Amplifier		
CHECKED			SIZE A	FSCM NO. 05XQ0	DWG NO. PRELIMINARY
ISSUED			SCALE N:S		SHEET 1 OF 1