DESCRIPTION


PMI MODEL LM-10M2D5G-100CW-1KWP-SFF-TH IS A RF LIMITER THAT OPERATES IN THE 10 MHz TO 2.5 GHz FREQUENCY RANGE. THIS LIMITER CAN HANDLE 100W CW AND 1 kW PEAK (1% DUTY CYCLE, 1 usec MAXIMUM PULSE WIDTH) INPUT POWER AND PROVIDES A MAXIMUM LEAKAGE OF +13 dBm AT 10 WATTS CW INPUT. THIS MODEL HAS A LOW INSERTION LOSS OF 0.8 dB AND A RECOVER TIME OF 2 usec TYPICAL.

SPECIFICATIONS

• FREQUENCY RANGE:10 MHz TO 2.5 GHz
• INSERTION LOSS:
• INPUT/OUTPUT VSWR:1.3:1 MAXIMUM (AT -10 dBm INPUT)
• IMPEDANCE:50 OHMS
• INPUT POWER: 100 WATTS CW MAXIMUM (NOTES 1, 2)
1 kW PEAK (1% DUTY CYCLE, 1 usec MAXIMUM PULSE V
(NOTES 1, 2, 3, 4)
• MAXIMUM FLAT LEAKAGE:+13 dBm MAXIMUM AT 10W CW
MAXIMUM FLAT LEAKAGE: 0 dBm MINIMUM



MECHANICAL OUTLINE

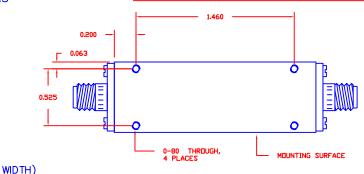



• NOTES:

1. POWER RATING AT 25°C: DERATED LINEARLY TO ZERO @ 150°C

RECOVERY TIME:
 2 usec TYPICAL
 FINISH: GOLD PLATED

- 2. HIGH POWER TEST DURATION: FULL RATED POWER FOR 10 SECONDS
- 3. HIGH POWER PEAK CONDITIONS: 1 kW PEAK (1% DUTY CYCLE, 1 usec MAXIMUM PULSE WIDTH)
- 4. EXTERNAL DC BLOCKS ARE REQUIRED FOR PROPER FUNCTION.



PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD FREDERICK, MARYLAND 21704 USA TEL: 301-662-5019 FAX: 301-662-1731 WEBSITE: www.pmi-rf.com

E-MAIL: <u>sales@pmi-rf.com</u> ISO 9001 CERTIFIED



				TITLE								
AF	PPROVALS	DATE		PRODUCT FEATURE								
DRAWN	v r	01/27/15	LM-10M2D5G-100CW-1KWP-SFF-TH									
REDRAWN	EW	3/14/18	SIZE	FSCM NO. 05XQ0		DWG NO.	PRELIMINARY				REV.	
ISSUED			SCALI	N:S				SHEET	1	OF	1	

ENVIRONMENTAL RATINGS

-60°C TO +100°C (STORAGE)

• STABILIZATION BAKE: MIL-STD-883, METHOD 1008, TEST COND. B

• THERMAL CYCLE.:MIL-STD-883, METHOD 1010, TEST COND. B

• CONSTANT ACCELERATION: MIL-STD-883, METHOD 2001, A (Y1 AXIS)

• EXTERNAL VISUAL: MIL-STD-883, METHOD 2009

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION