

DESCRIPTION:

PMI MODEL NUMBER P4T-12G18G-60-5/5-SFF IS A SINGLE POLE, FOUR THROW REFLECTIVE SWITCH DESIGNED TO OPERATE OVER THE 12GHZ TO 18GHZ FREQUENCY RANGE. THIS MODEL IS DESIGNED TO MAINTAIN LOW INSERTION LOSS, HIGH ISOLATION, AND FAST SWITCHING SPEED.

SPECIFICATIONS:

- FREQUENCY: 12.0 GHz TO 18.0 GHz
- INSERTION LOSS: 3.0dB TYPICAL
- ISOLATION: 60dB MINIMUM
- VSWR: 2.0:1
- SPEED: 50ns MAXIMUM
- POWER INPUT: 500 mW CW MAXIMUM
- CONTROL: TTL LOGIC - SEE LOGIC TABLE
- POWER SUPPLY: +5V @ 120 mA NOMINAL
-5V @ 45 mA NOMINAL
- CONNECTORS: SMA FEMALE CONNECTORS
- CONNECTORS: MICRO SUB-D 9 PIN

PIN OUT TABLE	
Pin No.	Function
1	E1
2	E2
3	N/C
4	N/C
5	N/C
6	GND
7	+V
8	-V
9	GND



LOGIC TABLE		
2 BIT DECODER		
E1	E2	FUNCTION
0	0	J1-J2 "Low Loss"
0	1	J1-J3 "Low Loss"
1	0	J1-J4 "Low Loss"
1	1	J1-J5 "Low Loss"

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	ORIGINAL RELEASE	1/22/10	

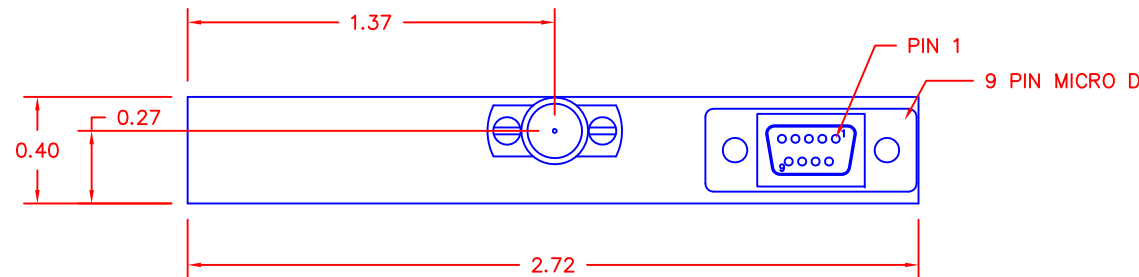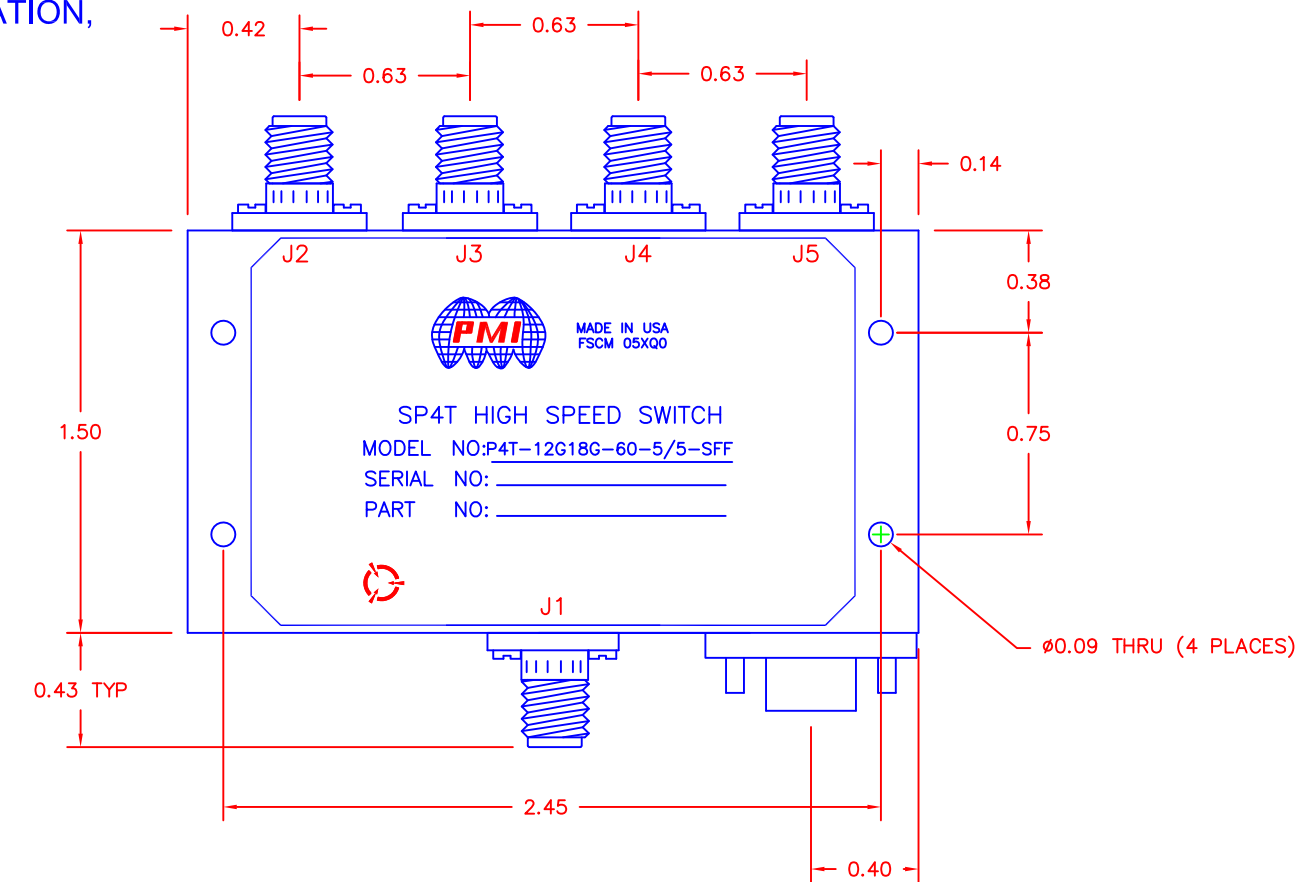

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001:2008 CERTIFIED



APPROVALS		DATE	TITLE	
DRAWN <i>KM</i>		1/22/10	PRODUCT FEATURE	
CHECKED			P4T-12G18G-60-5/5-SFF	
ISSUED	SIZE A	FSCM NO. 05XQ0	DWG NO. 27012921	REV. A
	SCALE N:S		SHEET 1 OF 1	