DESCRIPTION

LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR STANDARD PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR A SURFACE MOUNT COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. THIS MODEL PROVIDES THE FOLLOWING PERFORMANCE. DATA IS AVAILABLE UPON REQUEST.

SPECIFICATIONS

• FREQUENCY RANGE: — 2.0 to 18.0 GHZ

• GAIN FLATNESS:— ±1.5dB MAXIMUM

NOISE FIGURE:
 4.5dB TYPICAL

• OP1dB:------+20dBm MINIMUM

EXCLUDING CONNECTORS

• FINISH — GOLD PLATED

FEATURES

- INTERNAL VOLTAGE REGULATION
- UNCONDITIONAL STABILITY

AVAILABLE OPTIONS

- VARIOUS PACKAGE TYPES
- VARIOUS CONNECTOR TYPES
- TEMPERATURE COMPENSATION
- GAIN AND PHASE MATCHING
- MIL-STD-883 SCREENING AVAILABLE

ENVIRONMENTAL RATINGS

• TEMPERATURE: -54°C TO + 85°C (OPERATING) -65°C TO +125°C (STORAGE)

• HUMIDITY: _____ MIL-STD-202F, METHOD 103B COND. B

• SHOCK: MIL-STD-202F, METHOD 213B COND. B

• ALTITUDE: _____ MIL-STD-202F, METHOD 105C COND. B

• TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES

TOLERANCES:

X.XX ±0.020

X.XXX ±0.010


 REVISIONS

 ZONE
 REV.
 DESCRIPTION
 DATE
 APPROVED


 A1
 ORIGINAL RELEASE
 8/1/14

MECHANICAL OUTLINE

PE2 HOUSING WITH CARRIER

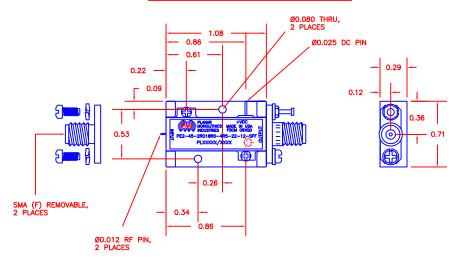

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

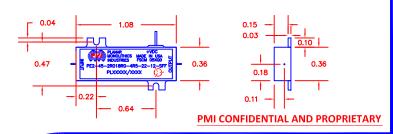

PLANAR MONOLITHICS INDUSTRIES, INC

7311-F GROVE ROAD FREDERICK, MARYLAND 21704 USA TEL: 301-662-5019 FAX: 301-662-1731 WEBSITE: www.pmi-rf.com E-MAJL: sales@pmi-rf.com

ISO 9001 CERTIFIED



		TITLE						
APPROVALS	DATE	PRODUCT FEATURE						
drawn KM	8/1/14	PE2-45-2R018R0-4R5-22-12-SFF						
CHECKED		SIZE	FSCM NO.		DWG NO.			REV.
		Α	05XQ0		27023801			A1
ISSUED		SCALE N:S				SHEET	1 OF	1