REVISIONS									
ZONE	REV.	DESCRIPTION	DATE	APPROVED					
	Α	ORIGINAL RELEASE	12/14/10						

Description:

Part Number 27007062 (Model Number PE2-22-5G6G-23-12-SFF) is a 5 to 6 GHz low noise amplifier. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component.

This model provides the following performance. Data is available upon request.

Specifications:

Frequency Range: 5 to 6 GHz Gain: 22dB Typ.

Gain Flatness: +/- 1.25dB Max.
Noise Figure: 4.5dB Max.
OP1dB: +23dBm Min.
VSWR Input/Output: 2.0:1 Max.
DC Voltage Supply: +12 to +15VDC
DC Current Draw: 450mA Max.
Connectors In/Out SMA Female

Features:

Internal Voltage Regulation
Unconditional Stability
Standard Operating Temperature -55 to +85 Deg. C

Available Options:

Various Package types
Various Connector types
Temperature Compensation
Gain and Phase Matching
MIL-STD-883 Screening Available

Environmental Ratings:

Temperature: -55 to +85 Deg. C (Operating)


-65 to +125 Deg. C (Storage)

Humidity: MIL-STD-202F, METHOD 103B COND B. Shock: MIL-STD-202F, METHOD 213B COND B. Altitude: MIL-STD-202F, METHOD 105C COND B.


Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

PE2 HOUSING WITH CARRIER

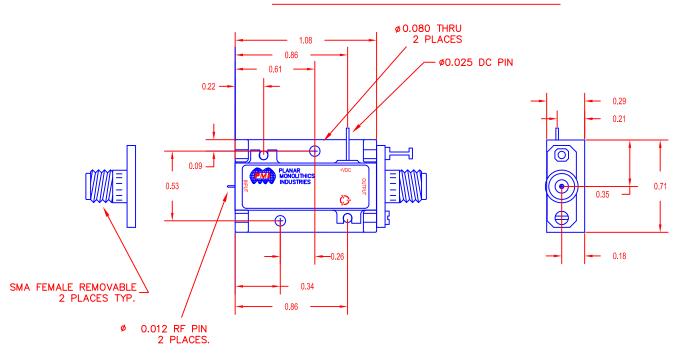

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

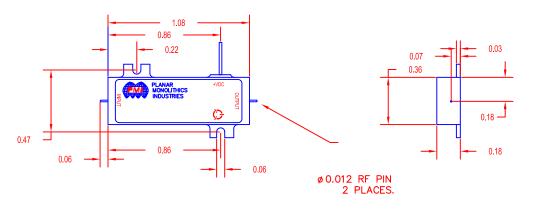

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES \pm .XX \pm 0.010 \pm

 $.xxx \pm 0.005$

		PART NO.				Æ	
		APPROVALS		DATE			
	MATERIAL: 6061–T6 Aluminum)PD	3/9/10	TITLE		
	FINISH:	Modified	SFK	12/14/10			
	GOLD PLATED	ISSUED			size B	C	
	DO NOT SCALE DRAWING				SCALE		

PE2 Series Amplifier PE2-22-5G6G-23-12-SFF

| SIZE | CAGE CODE | DWG NO. | RE | CAGE CODE | DWG NO. | RE | CAGE CODE | DWG NO. | RE | CAGE CODE |