


SPECIFICATIONS:

- FREQUENCY: 1.0 to 2.0GHz
- INSERTION LOSS: 0.8dB Max.
- RF POWER: 25 Watts Average
- DC CURRENT: 750mA Max.
- VSWR IN/OUT: 1.3:1 Max.
- INPUT & OUTPUT SMA (F)
- SIZE 1.081" (L) x 0.705" (W) x 0.367" (H)

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	ORIGINAL RELEASE	7/21/04	

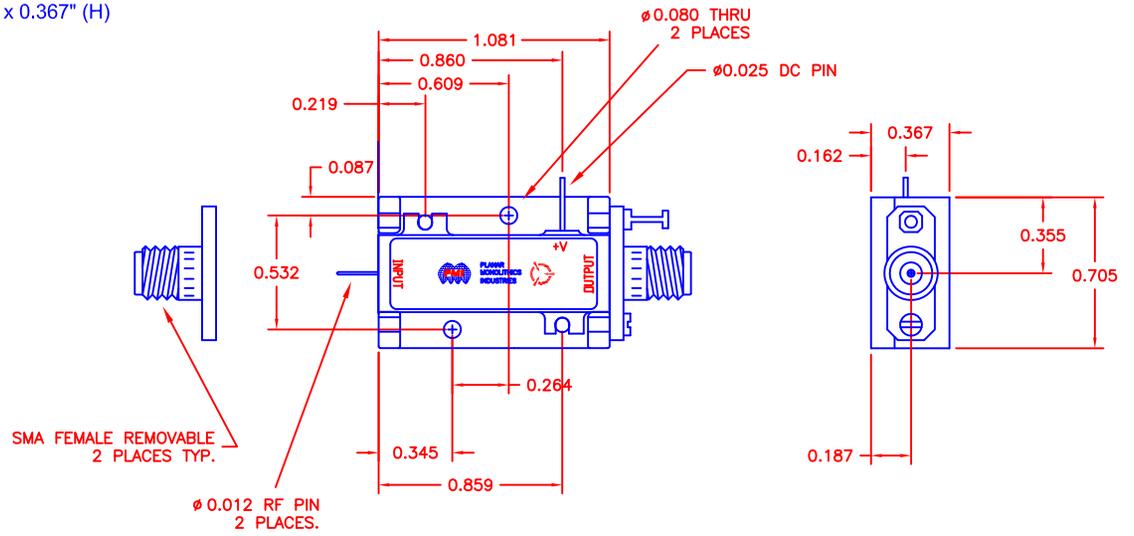

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE FRACTIONS DECIMALS ANGLES		PART NO.		PLANAR MONOLITHICS INDUSTRIES 7311 F. GROVE RD FREDERICK, MARYLAND	
MATERIAL:	FINISH:	APPROVALS	DATE	TITLE	
		DRIVER	7/21/04	Bias-Tee Outline	
		CHECKED		PE2-BT-12-750-SFF	
NOT ARMY	USED ON	DESIGNED		SIZE FROM NO.	DWG NO.
				B	27002522
APPLICATION	DO NOT SCALE DRAWING	SCALE	N/S	SHEET	1 OF 1