



### SUMMARY TEST DATA ON FILTER


**Customer :**  
**Job No :** PF505055  
**Model No :** 8CL7150-500-CD-SFM  
**Serial No :** PF634

**Tested By :** SP  
**Temperature :** +25°C  
**Date :** 07/15/05


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Frequency Range:	DC-8000 MHz	Pass	
2	Insertion Loss @ Fc	1dB	Pass (See Plot)	
3	Filter: 1dB Pass Band 6900-7400 MHz	< 1.0dB Max. P-P	(See Plot) Pass	
4	Rejection 6700 MHz	-40dBc MIN	(See Plot) Pass	
5	Rejection 7700 MHz	-40dBc MIN	Pass (See Plot)	
6	Rejection 6100 MHz	-65dBc MIN	Pass (See Plot)	
7	Rejection 8000 MHz	-65dBc MIN	Pass (See Plot)	
8	VSWR:	Input : 1.5:1 Output: 1.5:1 (Max.)	Pass (See Plot)	

**Production Manager Approval:** \_\_\_\_\_ **Date:** 07/15/05

**QA/QC Approval:** \_\_\_\_\_ **Date:** 07/15/05



### Serial Number PF634/0526

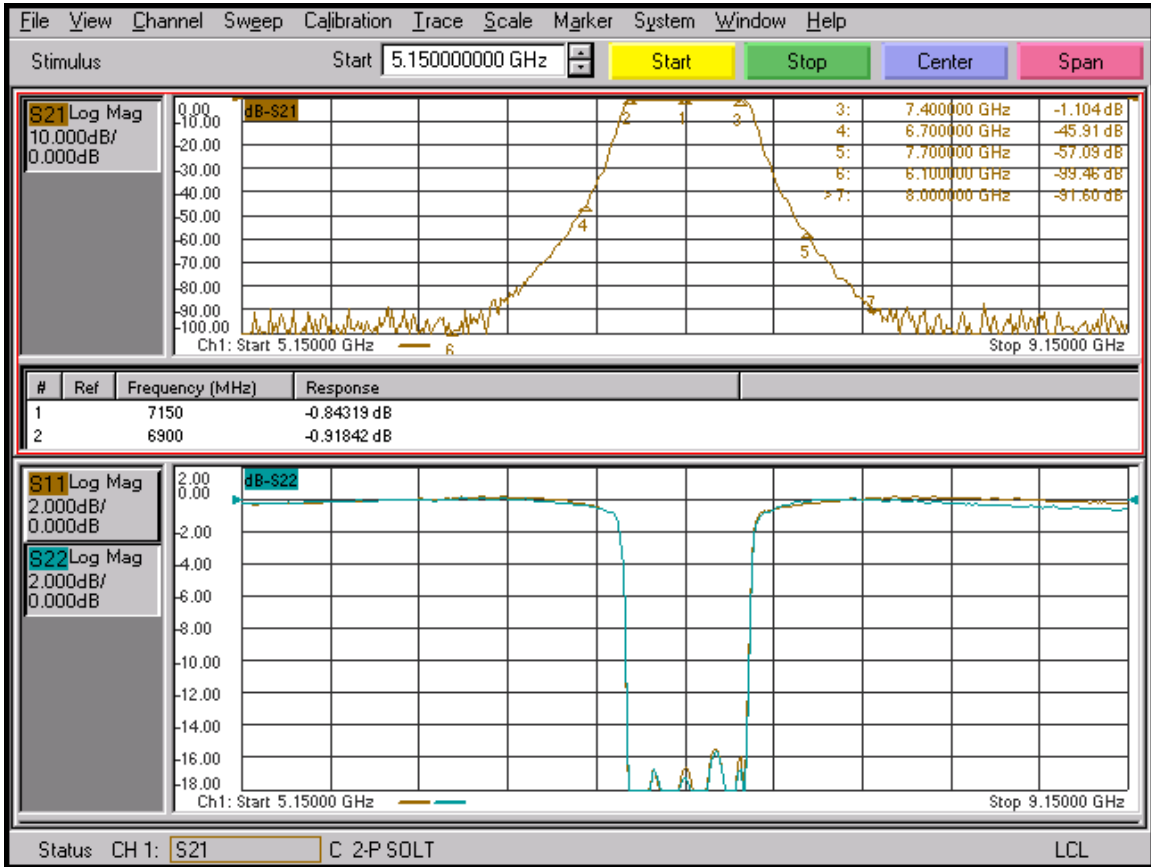

5715 Industry Lane, Unit 11, Frederick, MD 21704 USA Phone: (301)846-0870 Fax: (301)874-0871  
email: [sales@planarfilter.com](mailto:sales@planarfilter.com)