

**SUMMARY TEST DATA
ON
APD-4-800M2D5G-SFF-30W**

Customer: _____
 SO No: _____
 Model No: APD-4-800M2D5G-SFF-30W
 Serial No: 13060
 Part No: _____

Tested By: Bryan K.
 Temperature: +25 C
 Date: 4/19/2021
 Drawing No: 276256693 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	0.8 to 2.5 GHz	0.8 to 2.5 GHz	PMI QA 2	
2	Insertion Loss	≤0.7 dB	0.57 dB (See Plot)		
3	Isolation	20 dB Minimum	23.1 dB (See Plot)		
4	VSWR	≤1.25:1	1.12:1 (See Plot)		
5	Amplitude Balance	≤±0.3 dB	0.03 dB Max. -0.12 dB Min. (See Plot)		
6	Phase Balance	≤±6°	0.2° Max. -0.39° Min. (See Plot)		
7	Power Handling:	Forward ≤30W Reversed ≤1 W	Pass See Typical Characteristics		
8	Impedance:	50 Ω	50 Ω		PMI QA 2



Note: Amplitude and phase balance are relative to J2 Port.

QA/QC Approval:   PMI QA 2

4/20/21

SUMMARY TEST DATA ON APD-4-800M2D5G-SFF-30W

13060

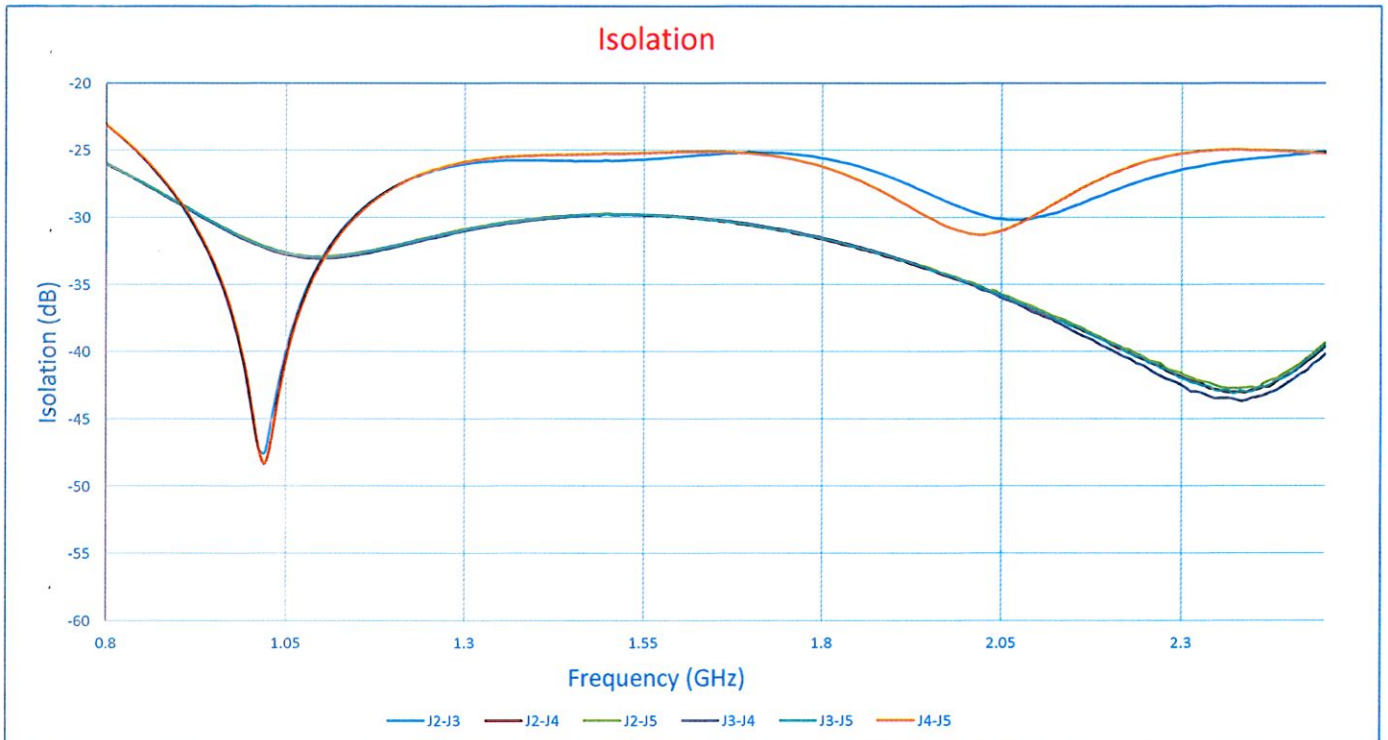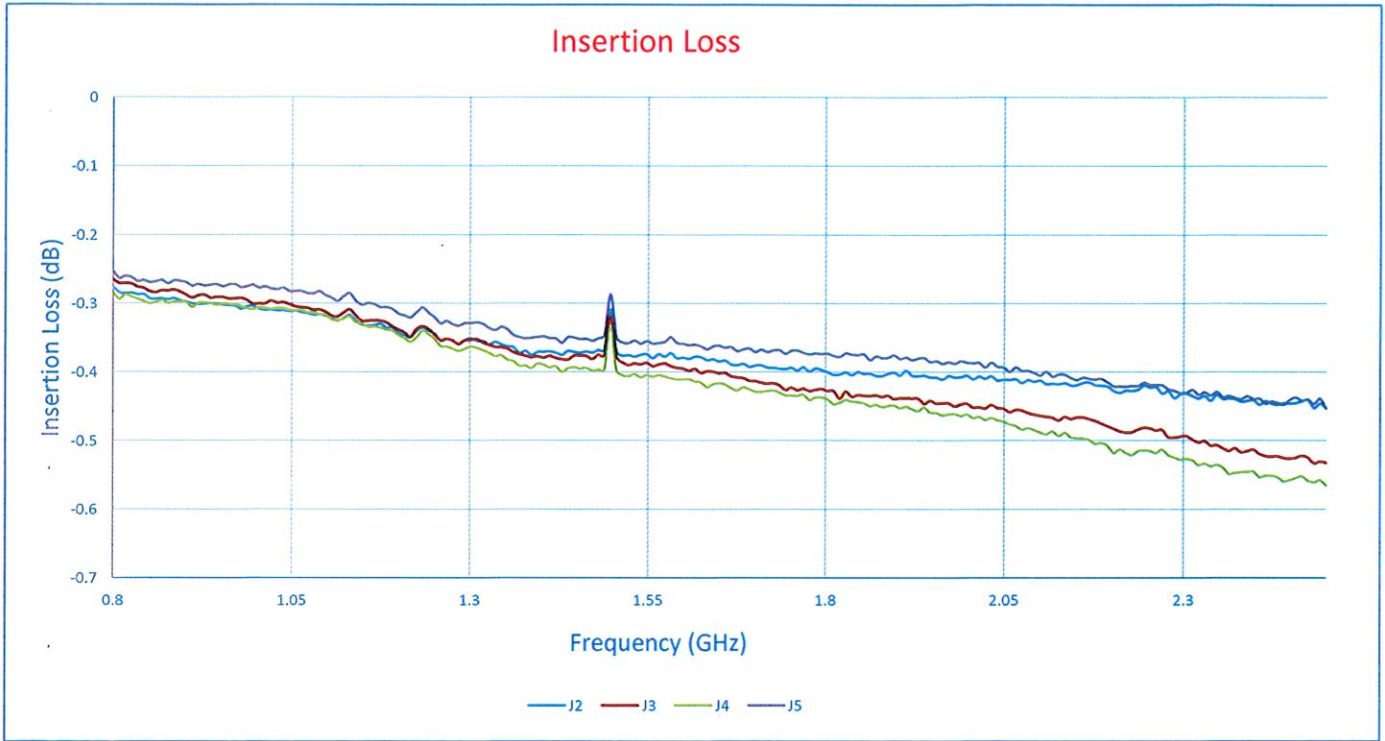

SUMMARY TEST DATA ON APD-4-800M2D5G-SFF-30W

13060

