


SUMMARY TEST DATA ON APD-8-800M2D5G-SFF-30W

Customer: _____
 SO No: _____
 Model No: APD-8-800M2D5G-SFF-30W
 Serial No: 13155
 Part No: _____

Tested By: Tin Lay
 Temperature: +25 C
 Date: 7/9/2021
 Drawing No: 27637360 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	800 MHz – 2.5 GHz	800 MHz – 2.5 GHz	PMI QA 2	
2	Insertion Loss	≤ 1.2 dB (ABOVE 9.03 dB SPLIT)	0.77 dB See Plot		
3	VSWR Input/Output	1.40: 1 MAXIMUM	1.23: 1 See Plot		
4	Isolation	20 dB MINIMUM	22.77 dB See Plot		
5	Amplitude Balance	±0.5 dB MAXIMUM	0.09 dB See Plot		
6	Phase Balance	±5° MAXIMUM	0.39° Min -0.77° Max		
7	Power Handling	FORWARD 30 WATT MAXIMUM REVERSED 1 WATT MAXIMUM	See Typical Characteristics		
8	Impedance	50Ω	50Ω		PMI QA 2

Note: Amplitude and phase balance are relative to J2 Port.



QA/QC Approval: _____

PMI
QA 2



Date: _____

7/19/2021

SUMMARY TEST DATA ON APD-8-800M2D5G-SFF-30W

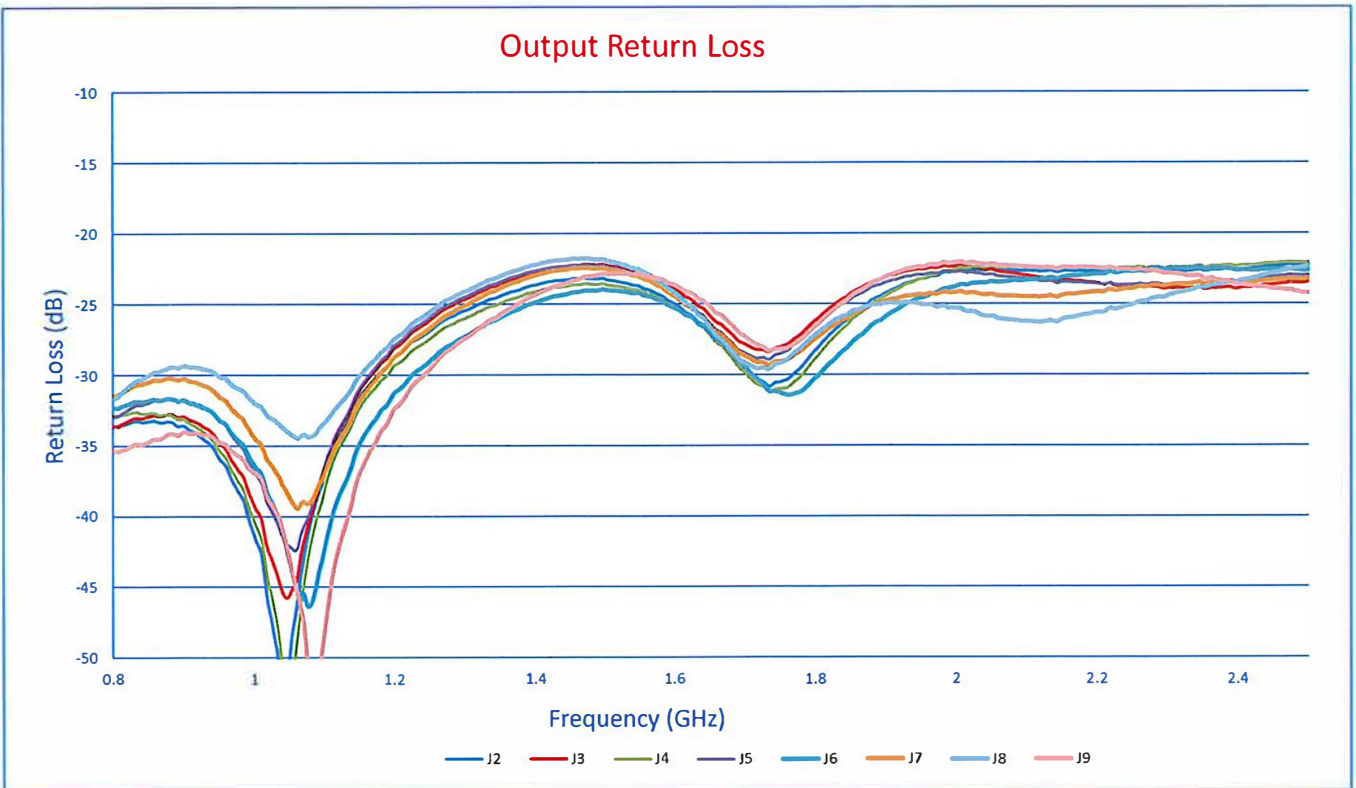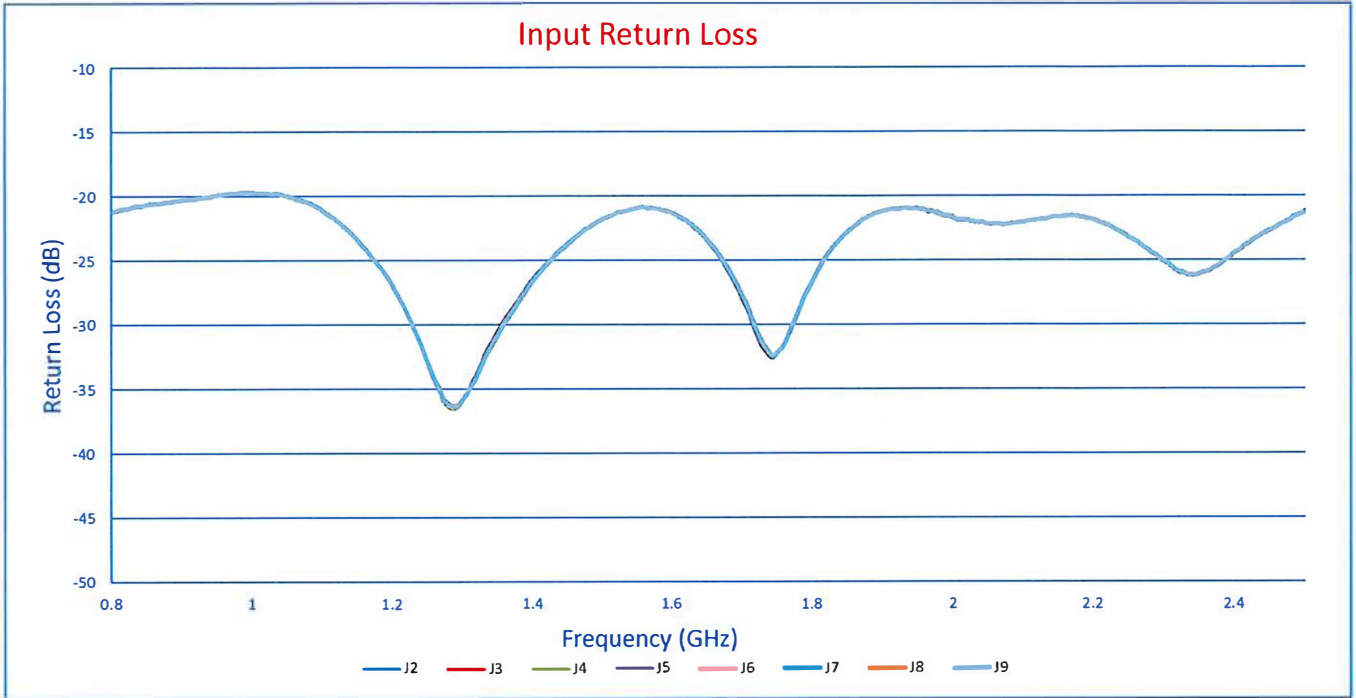

SUMMARY TEST DATA ON APD-8-800M2D5G-SFF-30W

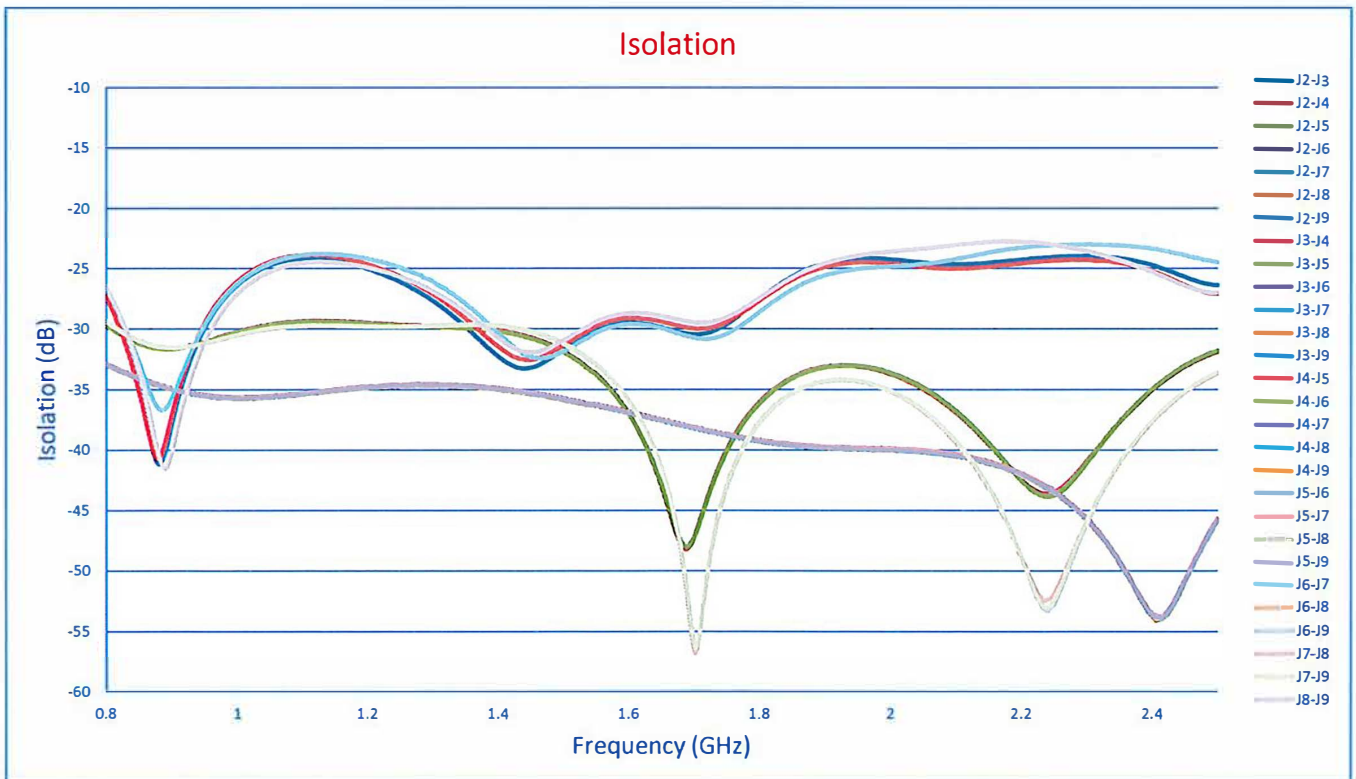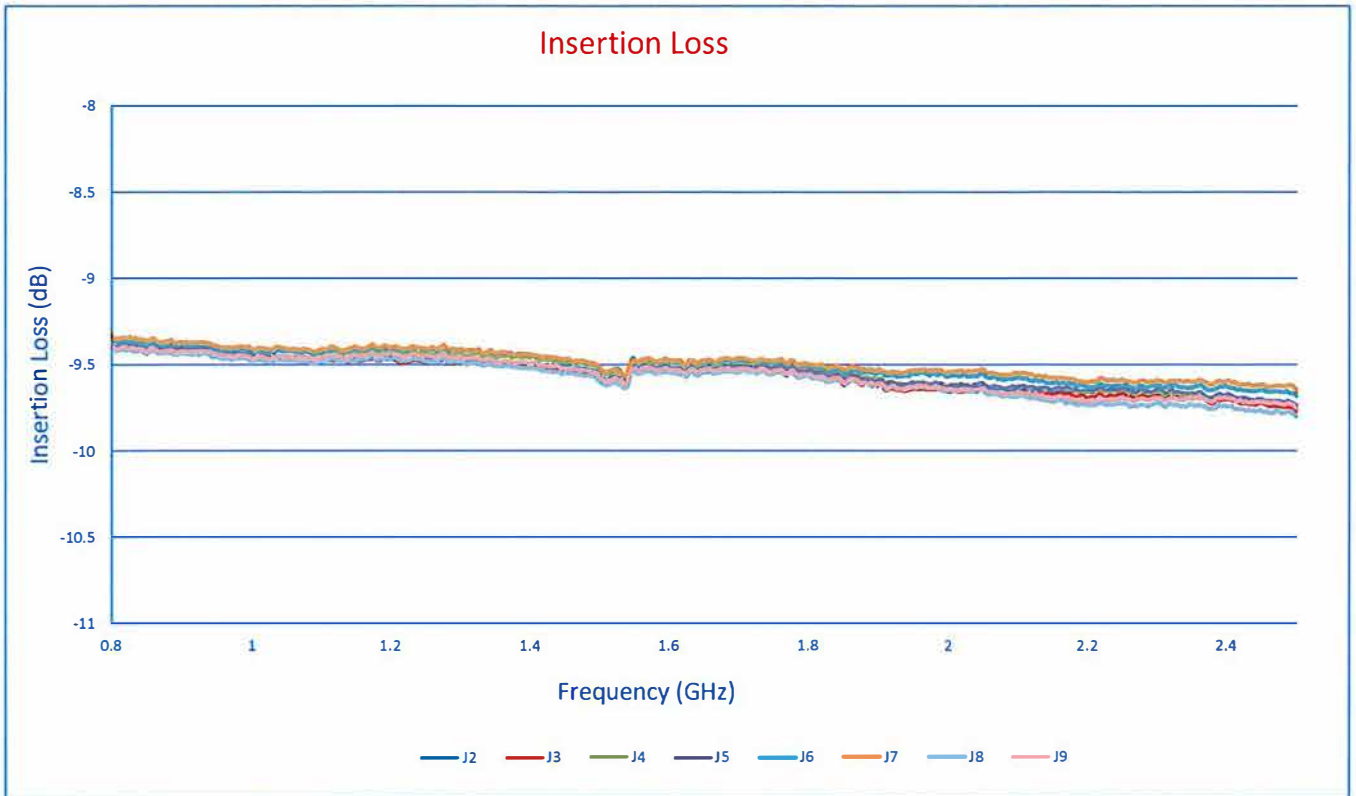

SUMMARY TEST DATA ON APD-8-800M2D5G-SFF-30W

