

**SUMMARY TEST DATA  
ON  
APD-2-800M2D5G-NFF-50W**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: APD-2-800M2D5G-NFF-50W  
 Serial No: 13171  
 Part No: \_\_\_\_\_

Tested By: Tin Lay  
 Temperature: +25 C  
 Date: 7/23/2021  
 Drawing No: 27627902 Rev: A1



TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	0.8 TO 2.5 GHz	0.8 TO 2.5 GHz	PMI QA 2	
2	Insertion Loss	0.4 dB Maximum	0.36 dB See Plot		
3	Isolation	22 dB Minimum	25.76 dB See Plot		
4	VSWR	≤1.25:1	1.18 :1 See Plot		
5	Phase Balance	±2° Maximum	0.07° See Plot		
6	Amplitude Balance	±0.2 dB Maximum	0.01 dB See Plot		
7	Power Handling	Forward ≤50 W Reversed ≤1 W	Pass		
8	Impedance	50 Ω	50 Ω		PMI QA 2

QA/QC Approval: 

PMI  
QA 2



Date: 7/26/2021

**SUMMARY TEST DATA  
ON  
APD-2-800M2D5G-NFF-50W**

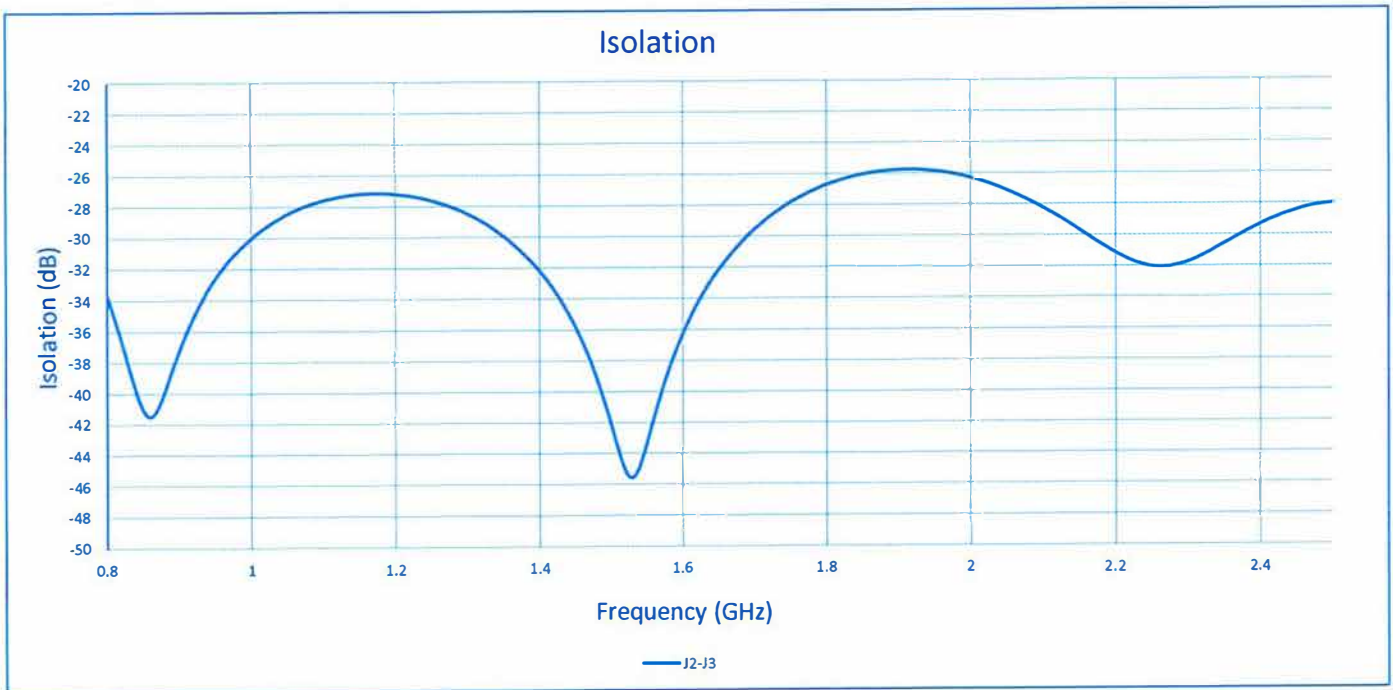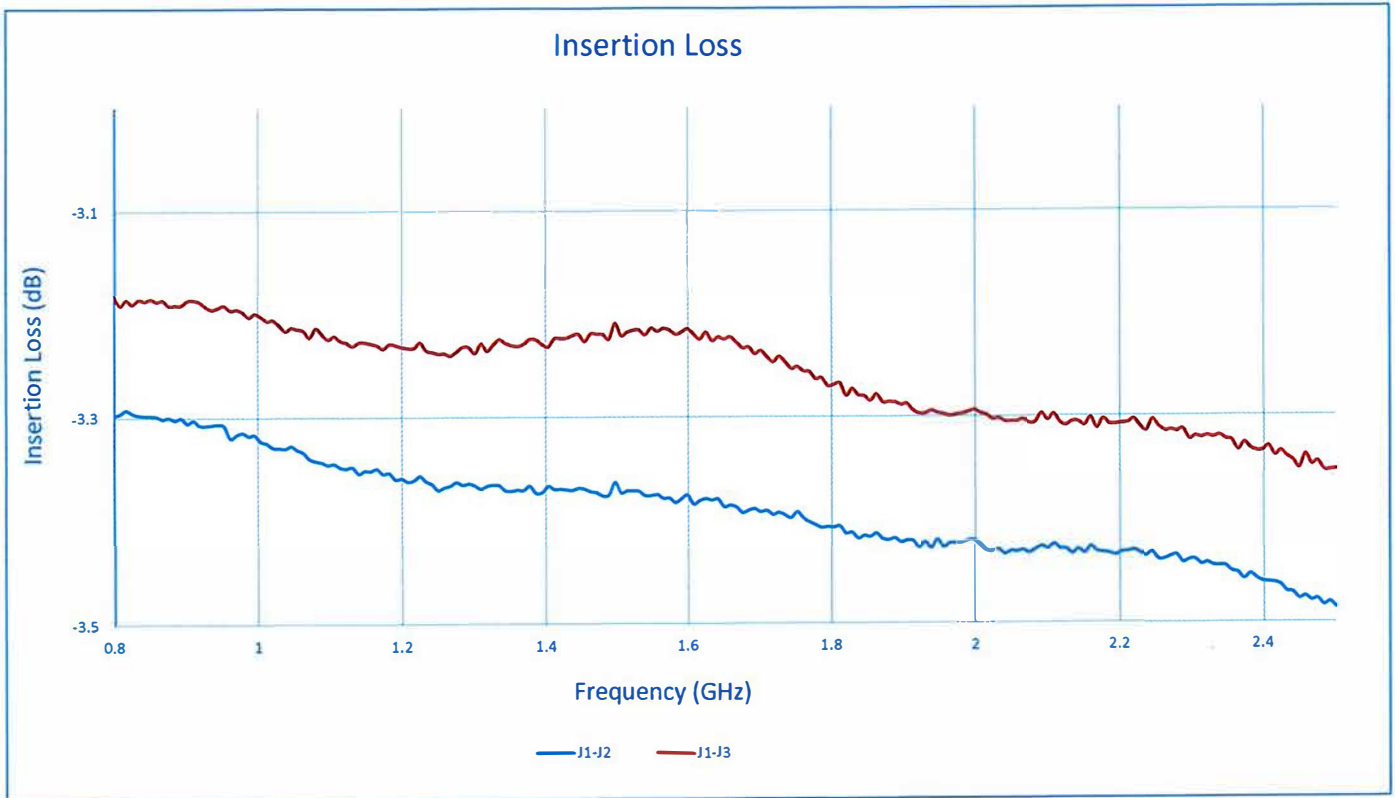



# SUMMARY TEST DATA ON APD-2-800M2D5G-NFF-50W

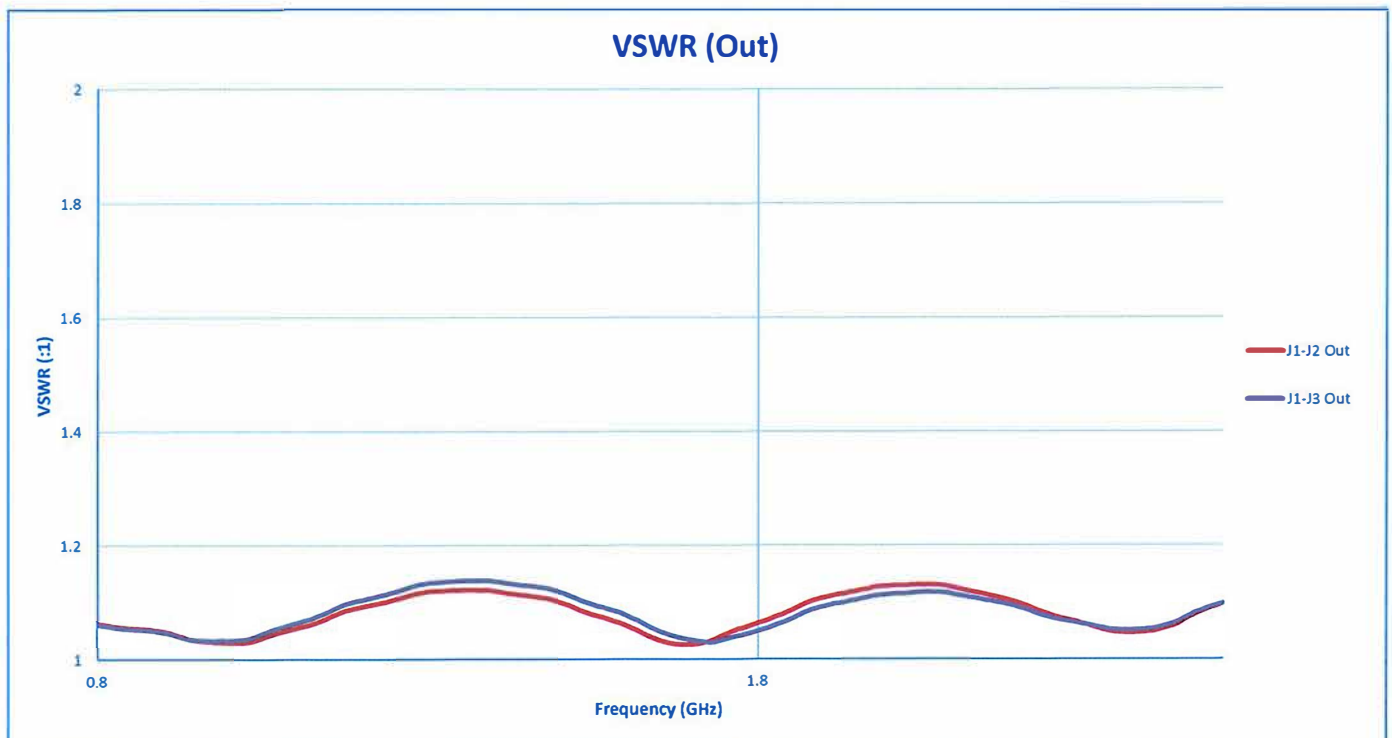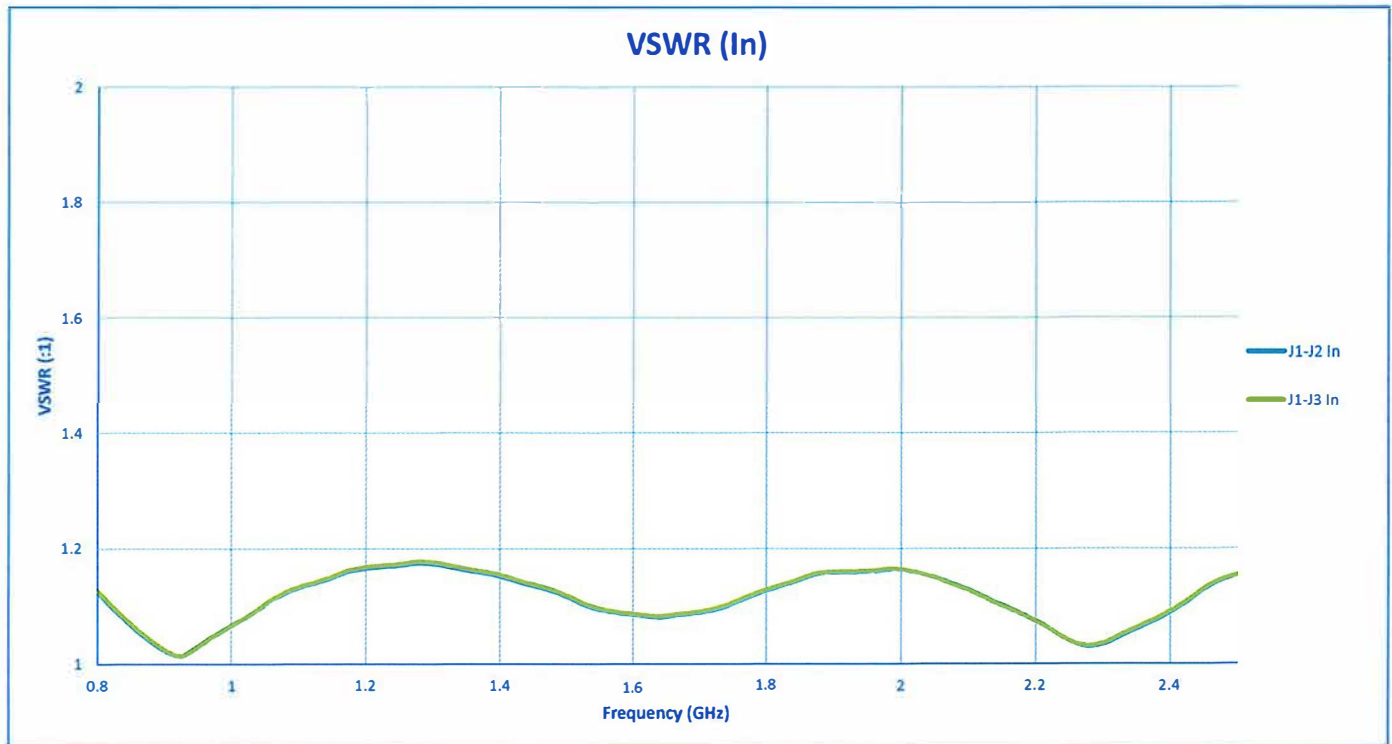



# SUMMARY TEST DATA ON APD-2-800M2D5G-NFF-50W

