

**SUMMARY TEST DATA  
ON  
APD-4-800M2D5G-SFF-30W**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: APD-4-800M2D5G-SFF-30W  
 Serial No: 13390

Tested By: J. Alexis  
 Temperature: +25 C  
 Date: 11/30/2021  
 Drawing No: 27625663      Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	0.8 GHz – 2.5 GHz	0.8 GHz – 2.5 GHz	QA QC 11/30/21       PMI QA 2
2	Insertion Loss	0.7 dB MAX (Above 6.02 dB Split)	0.5 dB (See Plot)	
3	Isolation	20dB Min	23.35 dB (See Plot)	
4	VSWR	1.25:1 Max	INPUT: 1.17:1 OUTPUT: 1.11:1 (See Plot)	
5	Amplitude Balance	±0.3 dB Typical	0.07 dB (See Plot)	
6	Phase Balance	±6° Typical	0.45° (See Plot)	
7	Power Handling:	Forward ≤30W Reversed ≤1 W	Pass See Typical Characteristics	
8	Impedance:	50 Ω	50 Ω	

Note: Amplitude and phase balance are relative to J2 Port.

QA/QC Approval: \_\_\_\_\_





PMI  
QA 2



Date: \_\_\_\_\_

11/30/2021

## SUMMARY TEST DATA ON APD-4-800M2D5G-SFF-30W

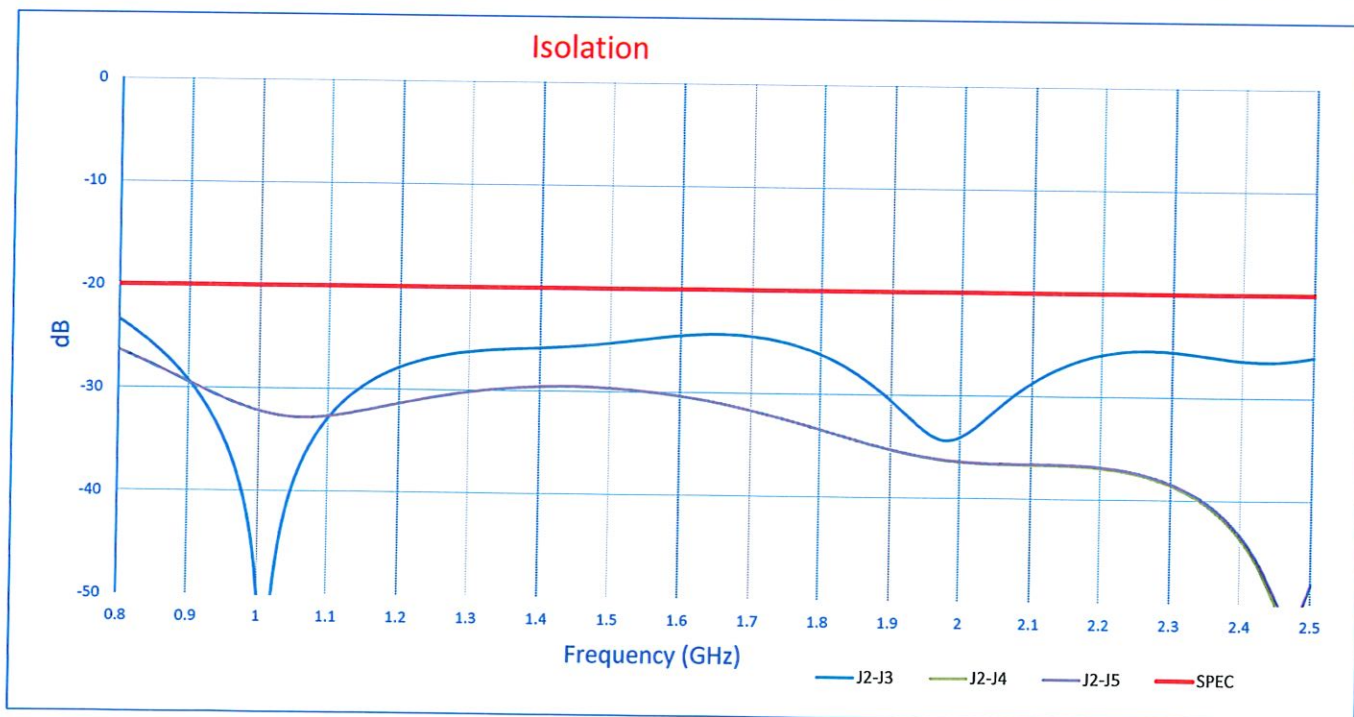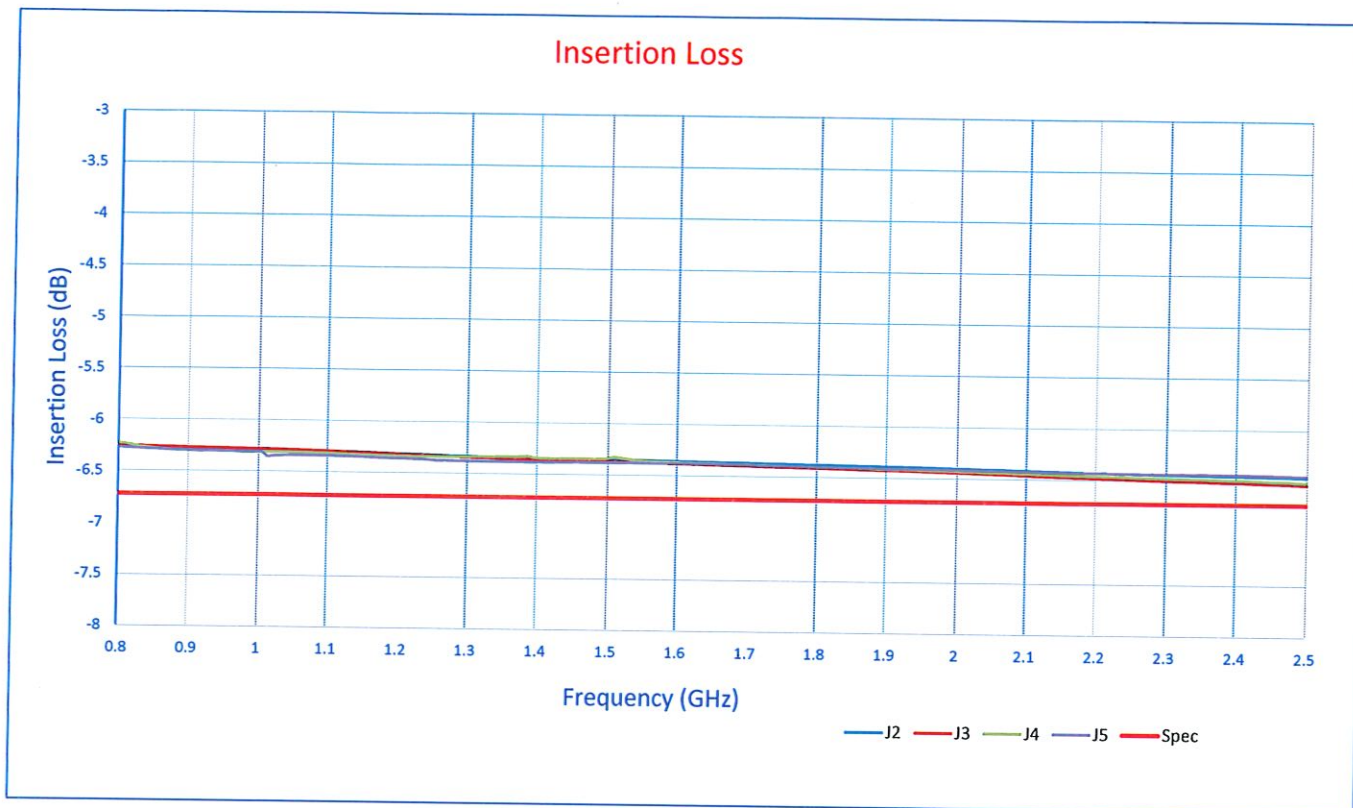

# SUMMARY TEST DATA ON APD-4-800M2D5G-SFF-30W

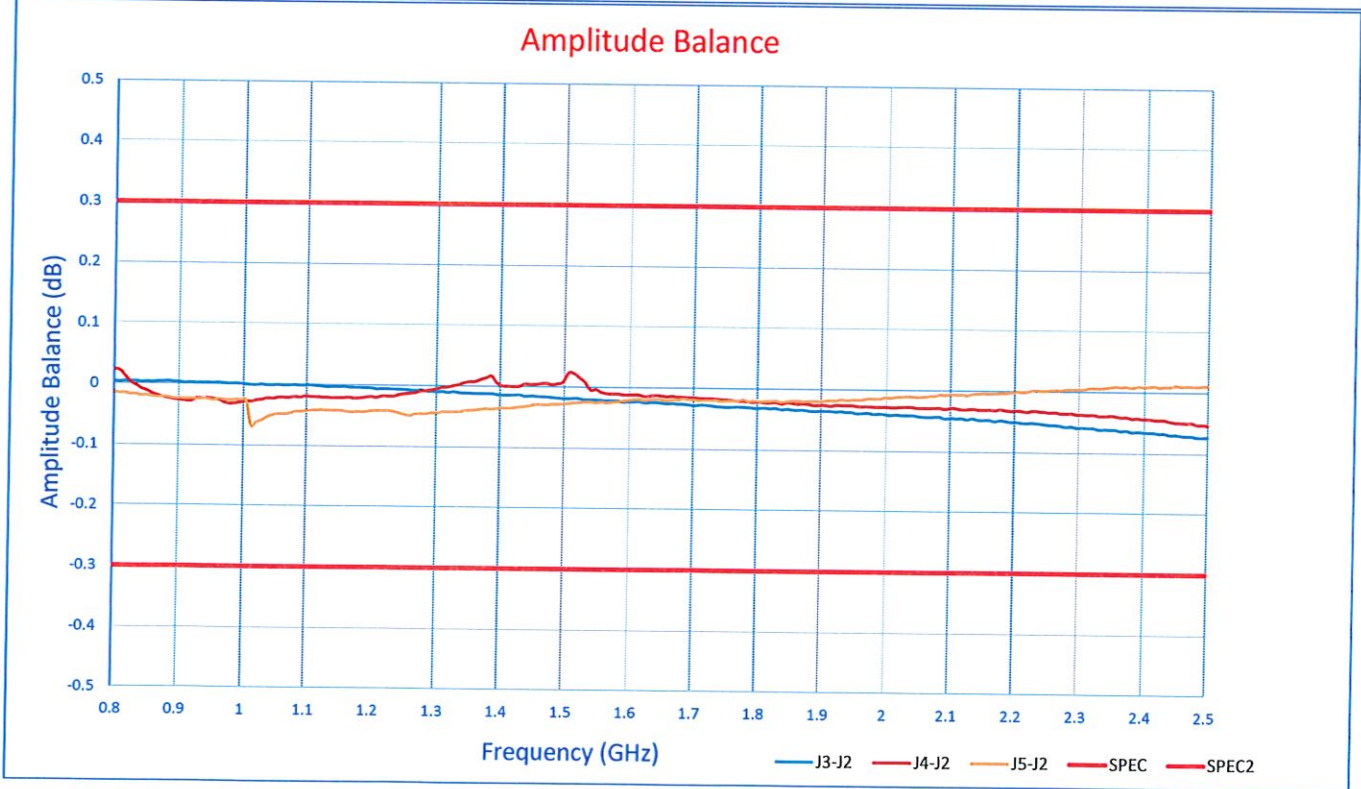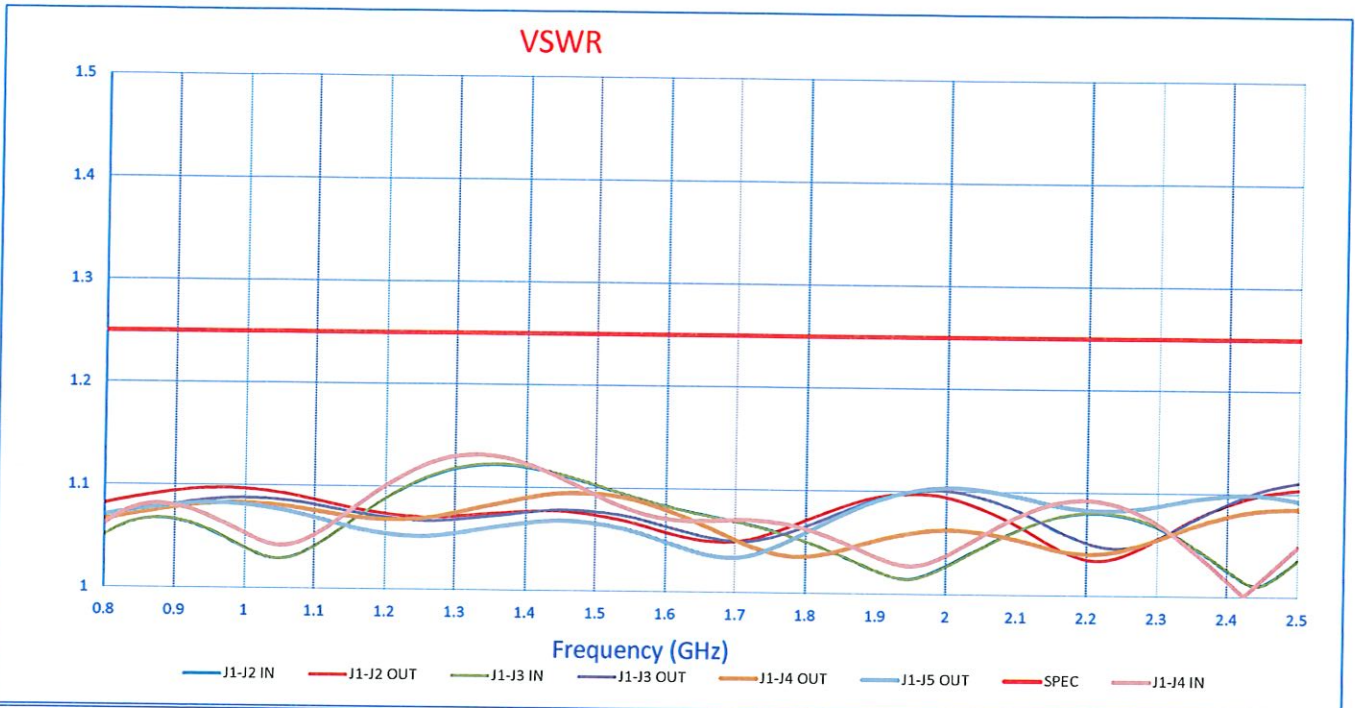

# SUMMARY TEST DATA ON APD-4-800M2D5G-SFF-30W

