



**SUMMARY TEST DATA
ON
TD-30T-SHS-218-12G18G-PECL**

S/N: PL13497/1331

Customer: _____ Tested By: K. Mansfield
 SO No: _____ Temperature: +25°C
 Model No: TD-30T-SHS-218-12G18G-PECL Date: 07/17/13
 Serial No: PL13497/1331 Drawing No: 27619243 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2 TO 18 GHz (Optimized 12 – 18 GHz)	2 TO 18 GHz (Optimized 12 – 18 GHz)	
2	VSWR:	3.0: 1 Max @ -20dBm	2.3:1 (See Plot)	
3	Minimum Signal Level for Logic 1:	-20 dBm @ 2.0 GHz -17 dBm @ 18.0 GHz	-20 dBm @ 2.0 GHz -18 dBm @ 18.0 GHz	
4	Threshold Variation over Frequency (Any 1 GHz Window)	± 0.5 dB	± 0.3 dB	
5	Minimum Signal Level for Logic 0	-25 dBm	-21 dBm	
6	Dynamic Range:	+10 dBm Max	+10 dBm	
7	Propagation Delay from 50% of an input of -20 dBm	15 ns Max	10.6 ns See Plot	
8	Propagation Delay from 50% of an input of +10 dBm	15 ns Max	3 ns See Plot	
9	Output Logic:	LVPECL Compatible	LVPECL Compatible	
10	DC Supply:	+15VDC @ 100 mA Max -15VDC @ 100 mA Max	+15VDC @ 86 mA -15VDC @ 34 mA	

QA/QC Approval: _____ Date: _____

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
TD-30T-SHS-218-12G18G-PECL**

S/N: PL13497/1331

Return Loss






**SUMMARY TEST DATA
ON
TD-30T-SHS-218-12G18G-PECL**

S/N: PL13497/1331

Propagation Delay
(From 50% of an input of -20dBm)
20ns per Div.

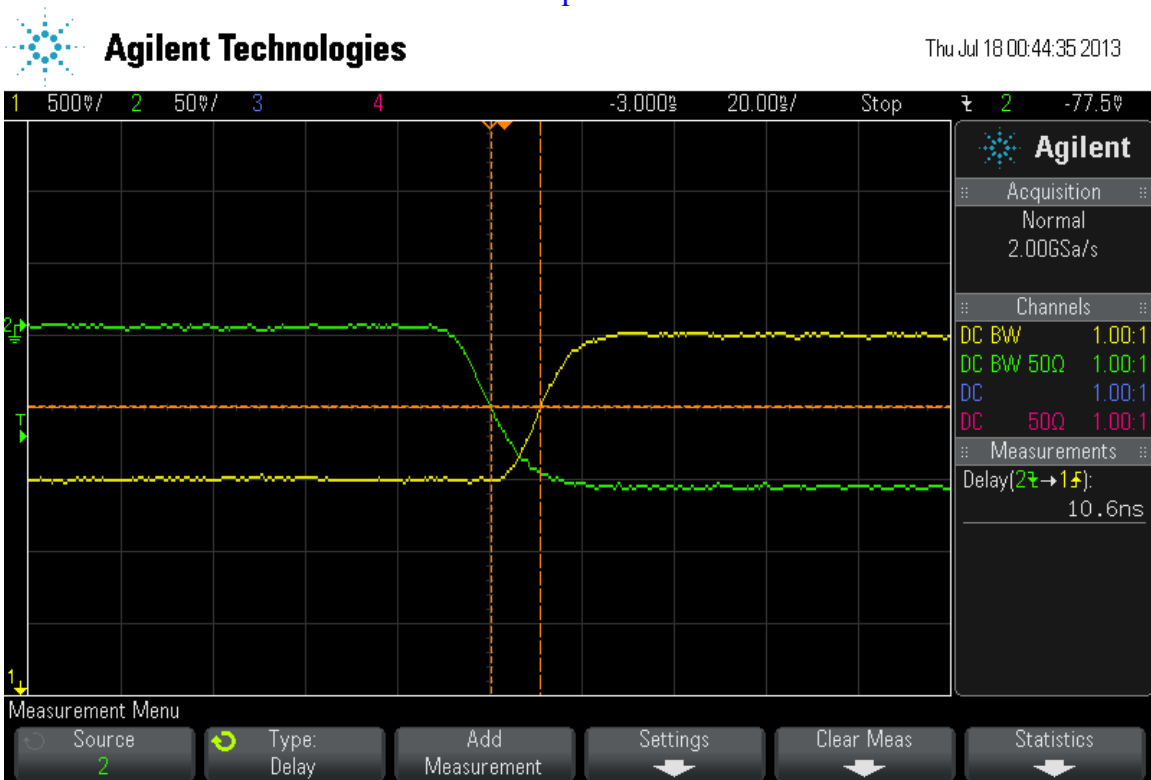


Green = RF Signal (Negative output diode detector)
Yellow = Threshold Detector Video out



**SUMMARY TEST DATA
ON
TD-30T-SHS-218-12G18G-PECL**

S/N: PL13497/1331

Propagation Delay
(From 50% of an input of +10dBm)
50ns per Div.

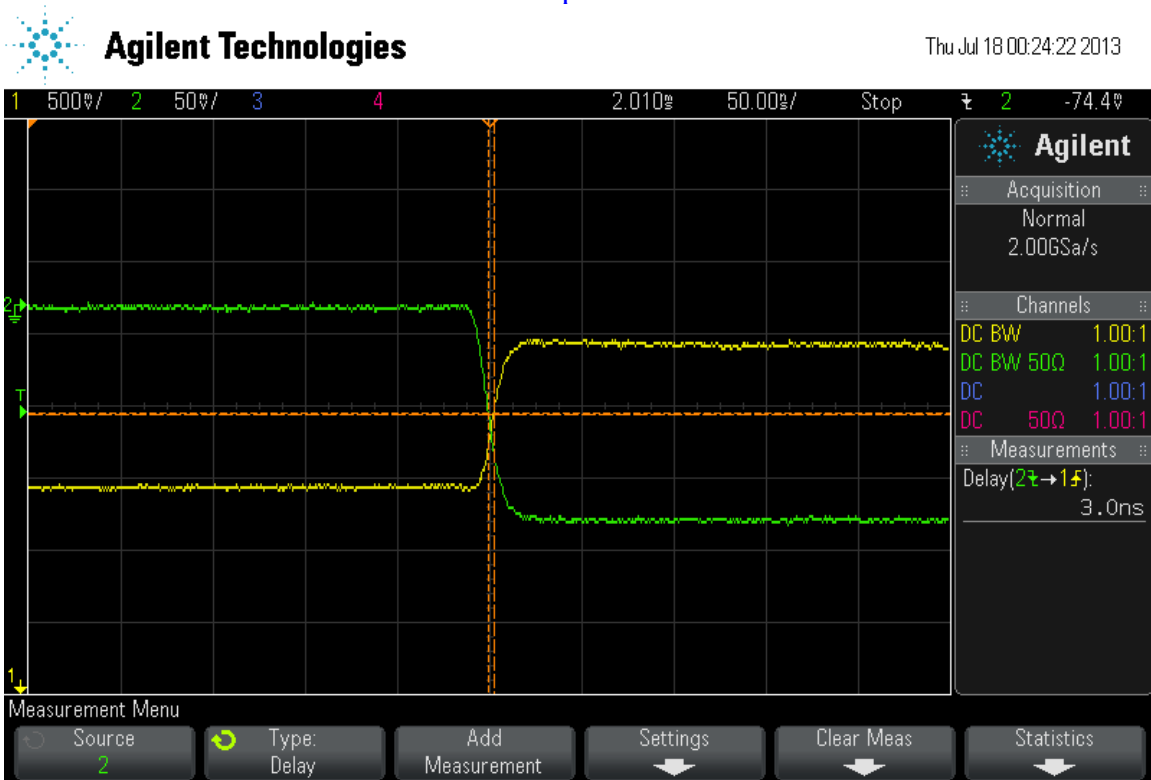

Green = RF Signal (Negative output diode detector)
Yellow = Threshold Detector Video out