



**SUMMARY TEST DATA  
ON  
PE2-28-218-5R0-12-15-SFF**

Customer: \_\_\_\_\_ Tested By: Ken Schwarz  
SO No: SO13-204-002-AP-PE Temperature: +25°C  
Model No: PE2-28-218-5R0-12-15-SFF Date: 10/22/13  
Serial No: PL14101 Drawing No: 27607905 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2.0 to 18.0 GHz	2.0 to 18.0 GHz	<i>JB</i>
2	Gain:	+24dB Min.	24.3 dB (See Plot)	<i>JB</i>
3	Flatness:	±2.0dB Max.	± 1.7 dB	<i>JB</i>
4	Noise Figure:	4.5dB Max.	4.3 dB	<i>JB</i>
5	Pout @ 1dB Compression:	+14dBm Min.	+14.7 dBm	<i>JB</i>
6	VSWR In/Out:	1.9:1 Max.	1.42:1 / 1.49:1 (See Plot)	<i>JB</i>
7	DC Supply:	200mA @ +15 VDC Max.	128 mA	<i>JB</i>
8	Operating Temp.:	-25 to +85°C	-25 to +85°C	<i>JB</i>

QA/QC Approval: *Stephen C Bayler* Date: 12/12/13


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)



SUMMARY TEST DATA  
ON  
PE2-28-218-5R0-12-15-SFF

Gain Plot

CH1:	A	-M	SA	+24.30 dB
	1.0 dB/		REF	26.00 dB

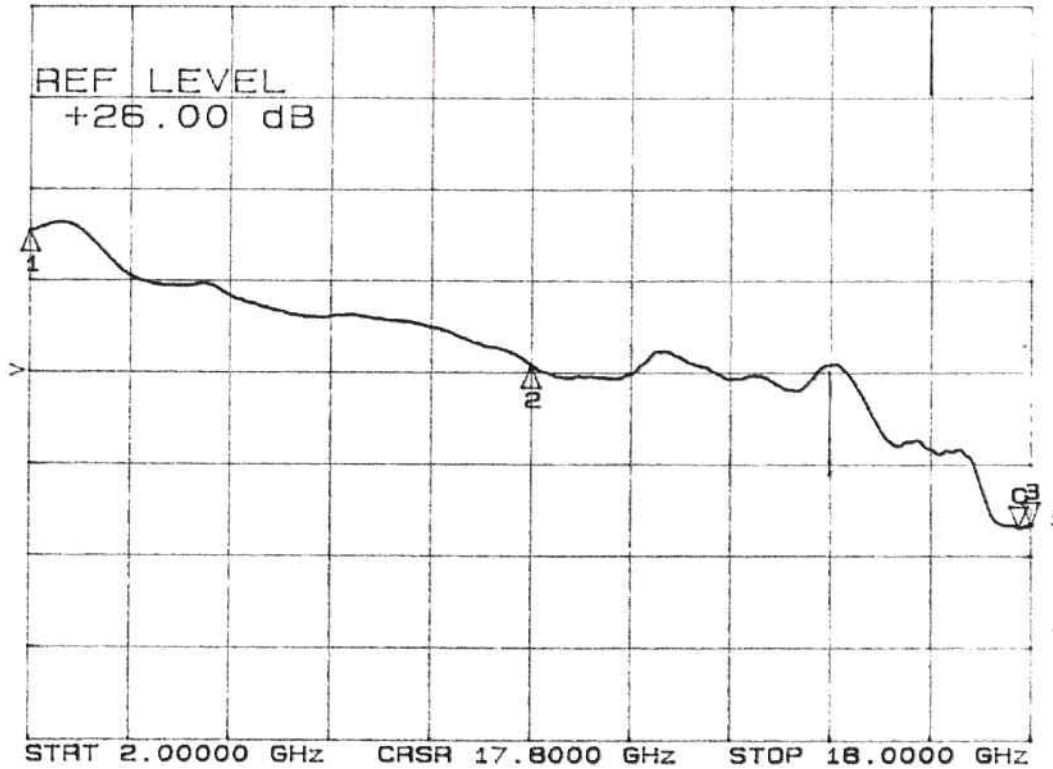



SUMMARY TEST DATA  
ON  
PE2-28-218-5R0-12-15-SFF

Input / Output VSWR Plot

— VSWR IN  
— VSWR OUT

CH2: B	-M	A	-15.49 dB
5.0 dB/		REF	-10.00 dB

