



**SUMMARY TEST DATA
ON
PE2-28-218-5R0-12-15-SFF**

Customer: _____ Tested By: Ken Schwarz
SO No: SO13-204-002-AP-PE Temperature: +25°C
Model No: PE2-28-218-5R0-12-15-SFF Date: 10/22/13
Serial No: PL14102 Drawing No: 27607905 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2.0 to 18.0 GHz	2.0 to 18.0 GHz	SB
2	Gain:	+24dB Min.	26.0 dB (See Plot)	SB
3	Flatness:	±2.0dB Max.	±1.35 dB	SB
4	Noise Figure:	4.5dB Max.	4.3 dB	SB
5	Pout @ 1dB Compression:	+14dBm Min.	+14.7 dBm	SB
6	VSWR In/Out:	1.9:1 Max.	1.66:1 / 1.48:1 (See Plot)	SB
7	DC Supply:	200mA @ +15 VDC Max.	122 mA	SB
8	Operating Temp.:	-25 to +85°C	-25 to +85°C	SB


QA/QC Approval: *Stephen C. Bayliss* Date: 12/12/13



SUMMARY TEST DATA
ON
PE2-28-218-5R0-12-15-SFF

Gain Plot

CH1:	A	-M	S	+26.02 dB
	1.0	dB/	REF	26.00 dB

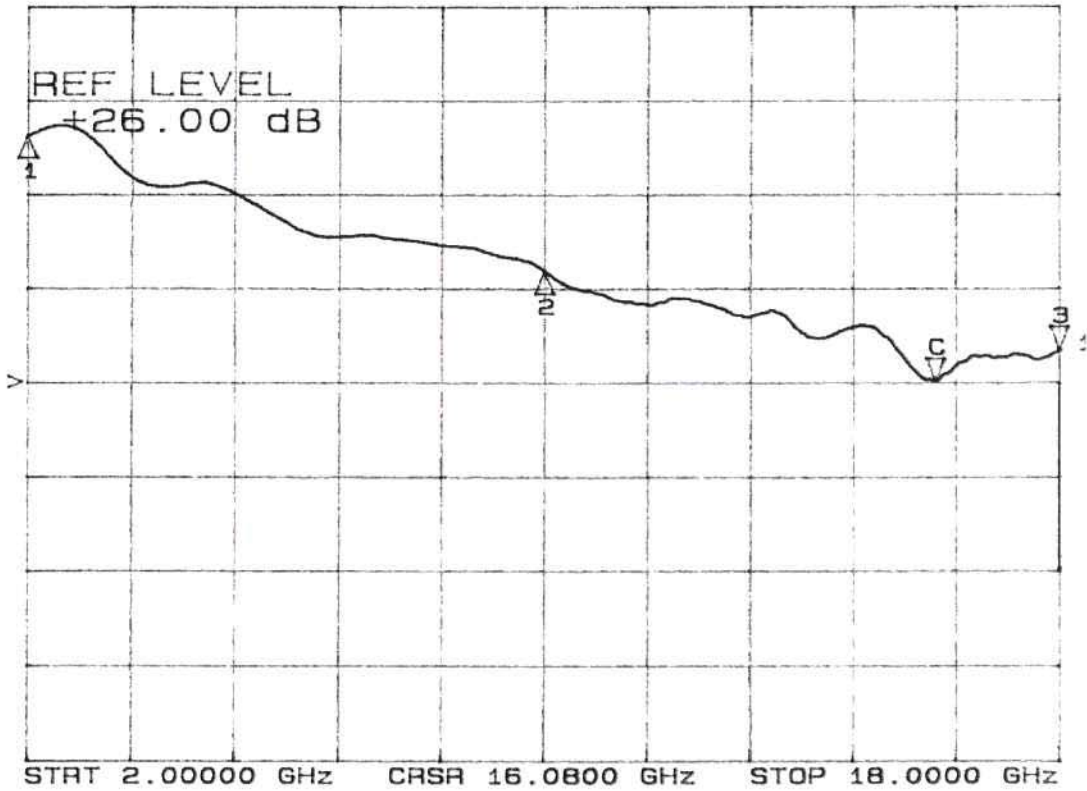



SUMMARY TEST DATA
ON
PE2-28-218-5R0-12-15-SFF

Input / Output VSWR Plot

