SUMMARY TEST DATA
ON
DD-20-218-5PF-3-P-M

Customer:		**Tested By:**	**Ken Schwartz**		
SO No:	**SO13-204-004**	**Temperature:**	**+25°C**		
Model No:	**DD-20-218-5PF-3-P-M**	**Date:**	**12/16/2013**		
Serial No:	**PL14401**	**Drawing No:**	**27620615**	**Rev:**	**A1**

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	PASS FAIL	QA QC
1	Frequency Range:	2 TO 18 GHz	**2 TO 18 GHz**	SB
2	VSWR:	3.5: 1 MAX @-23 dBm	**2.35:1 (See Plot #1)**	SB
3	Frequency Flatness:	± 1.0 dB (Max)	**± .825 dB**	SB
4	Rise Time	5nS Typical	**4.75 ns**	SB
5	Voltage Sensitivity:	500 mV/mW	**820 mV/mW**	SB
6	Maximum Input Power:	+20 dBm	**+20 dBm**	SB

QA/QC Approval: Stephen C Byrne **Date:** 12/17/13

4921 Robert J Mathews Pkwy, El Dorado Hills CA 95762 Phone: 916-542-1401, Fax: 916-265-2597
Email: sales@pmi-rf.com

SUMMARY TEST DATA
ON
DD-20-218-5PF-3-P-M

VSWR Plot

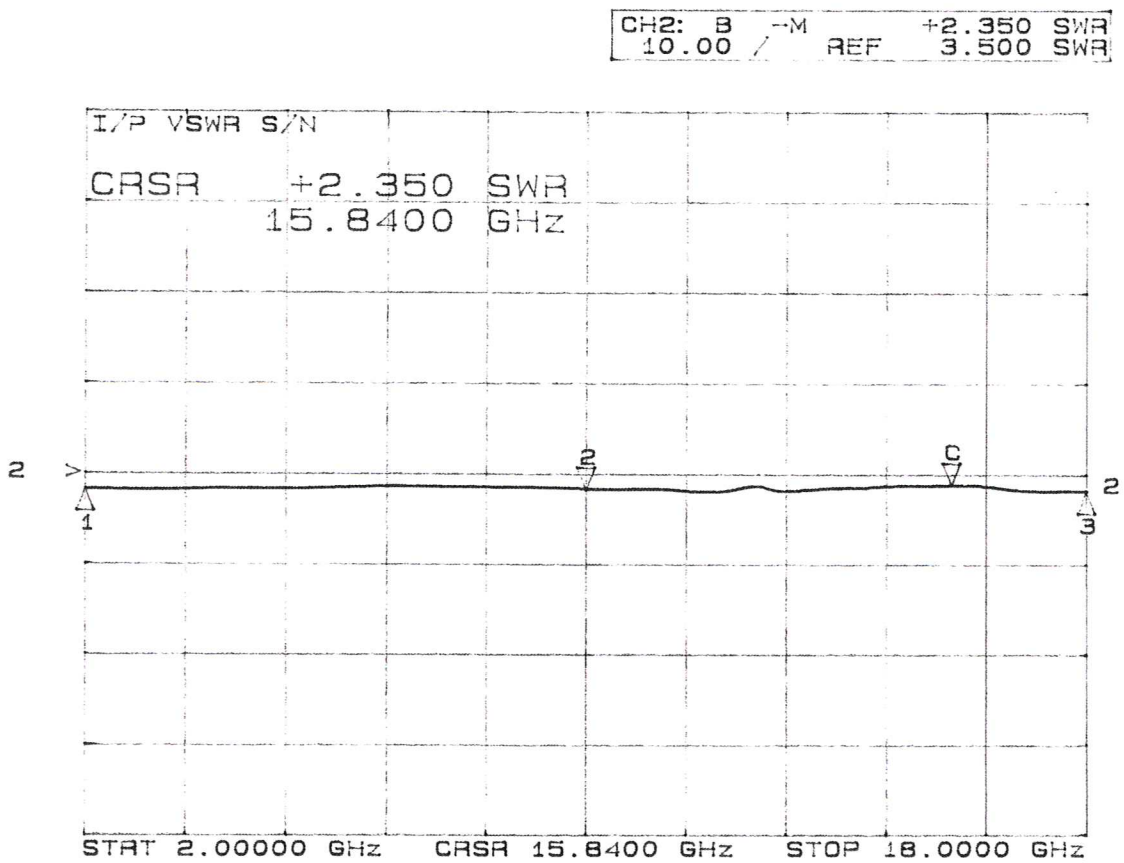

4921 Robert J Mathews Pkwy, El Dorado Hills CA 95762 Phone: 916-542-1401, Fax: 916-265-2597
Email: sales@pmi-rf.com