



**SUMMARY TEST DATA  
ON  
8CL3D55G-300-CD-SFF**

PL14716/1408

Customer: \_\_\_\_\_ Tested By: S. PALACIO  
 SO No: \_\_\_\_\_ Temperature: +25°C  
 Model No: 8CL3D55G-300-CD-SFF Date: 2/25/2014  
 Serial No: PL14716/1408 Drawing No: 27611726 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Pass band Frequency Range:	3400 MHz –3700 MHz	<b>3400 MHz –3700 MHz See Plots</b>	
2	1dB Pass-band Bandwidth:	300 MHz	<b>301 MHz See Plots</b>	
3	Passband Insertion Loss:	1.5dB Max	<b>0.61dB See Plots</b>	
4	Rejection	55dB @ 3200MHz	<b>69.2dB @ 3200 MHz See Plots</b>	
5	Rejection	60dB @ 4000 MHz	<b>80.4dB @ 4000 MHz See Plots</b>	
6	Pass band VSWR	1.5:1 Max	<b>1.25:1 See Plots</b>	
7	Delta IL Between 3400 MHz & Fo.	0.5dB Max.	<b>0.2dB See Plots</b>	

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
 Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)



# SUMMARY TEST DATA ON 8CL3D55G-300-CD-SFF

PL14716/1408

## Insertion Loss, Return Loss, Bandwidth, Rejections

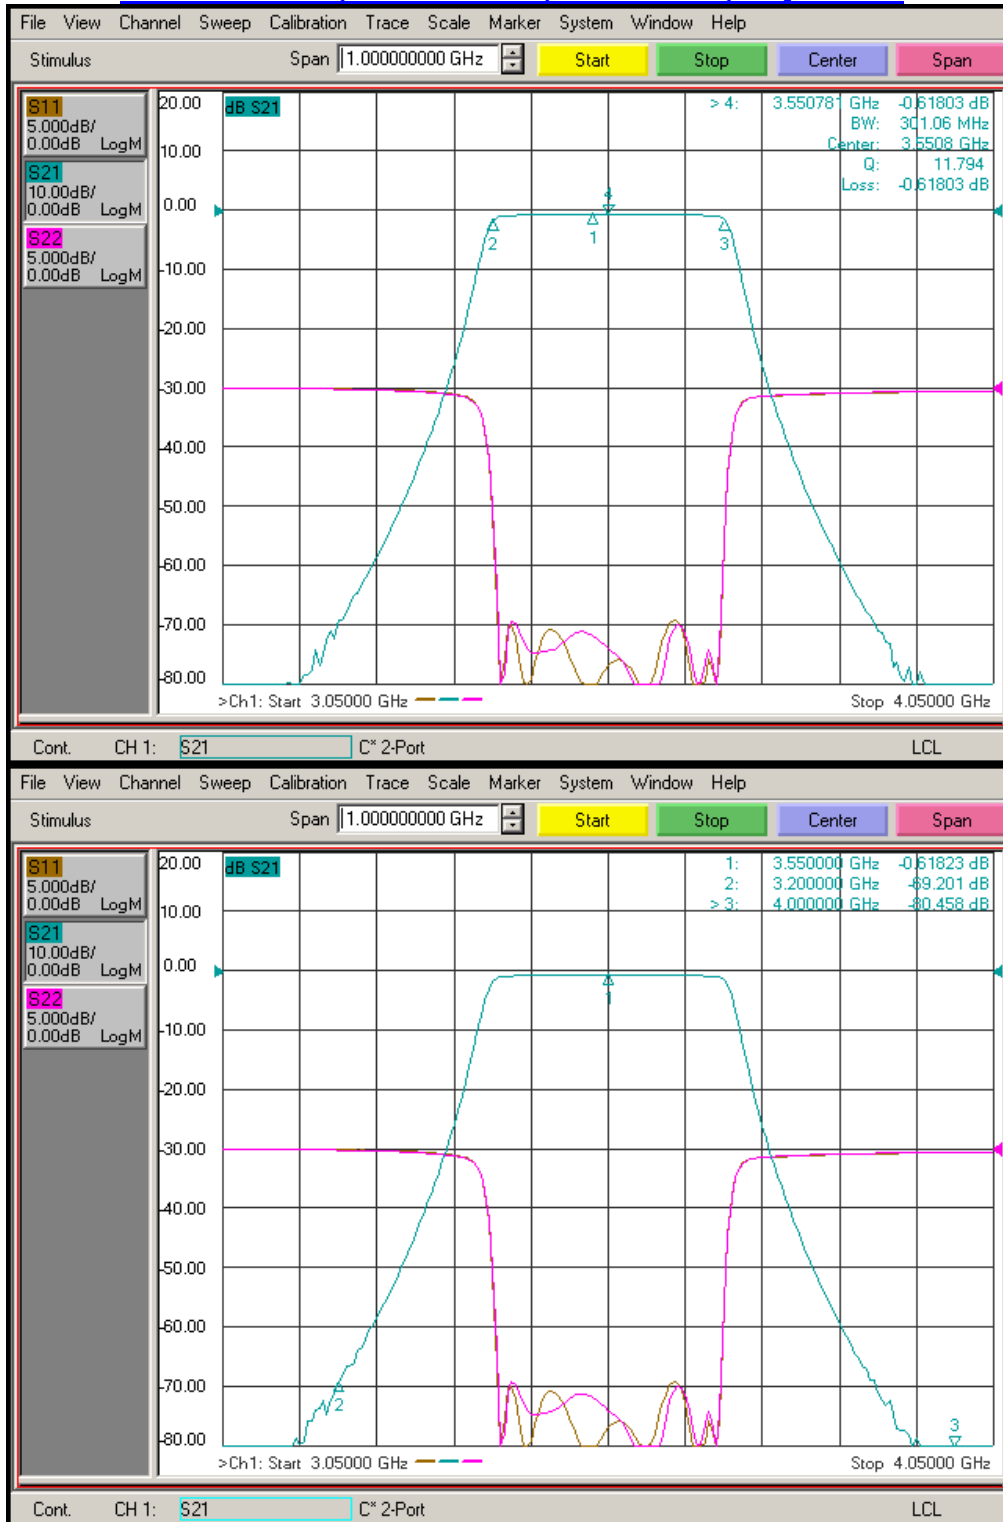

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)