



**SUMMARY TEST DATA
ON
5CL9D18G-180-CD-SFF**

Customer: _____	Tested By: <u>S. PALACIO</u>
SO No: _____	Temperature: <u>+25°C</u>
Model No: <u>5CL9D18G-180-CD-SFF</u>	Date: <u>8/25/2014</u>
Serial No: <u>PL15700/1433</u>	Drawing No: <u>27609849</u> Rev: <u>A1</u>
Part No: <u>6579325-27</u>	


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Center Frequency	9180 MHz Nom.	9180 MHz Nom. See Plot	
2	3 dB Pass band Bandwidth:	180 MHz Min.	180MHz See Plot	
3	Pass band VSWR:	1.5:1 Max	1.31:1 See Plot	
4	Passband Insertion Loss:	4 dB Max	1.22dB See Plot	
5	Loss Ripple (peak-to-peak):	0.5 dB Max	0.1dB See Plot	
6	Phase Linearity:	±6° Max	±2.5° See Plot	
7	Rejection 70 dB:	DC – 7000 MHz	104.87dB See Plot	
8	Rejection 60 dB:	7800 MHz 10560 – 11940 MHz	97.61dB 90.02dB See Plot	
9	Rejection 50 dB:	12000 – 15000 MHz	91.42dB See Plot	
10	Input Power:	+30dBm Max	+30dBm See Plot	
11	Impedance: (Source Load)	50 ohms Nom.	Pass	

QA/QC Approval: _____ Date: _____




**SUMMARY TEST DATA
ON
5CL9D18G-180-CD-SFF**

Broad-Band Plot

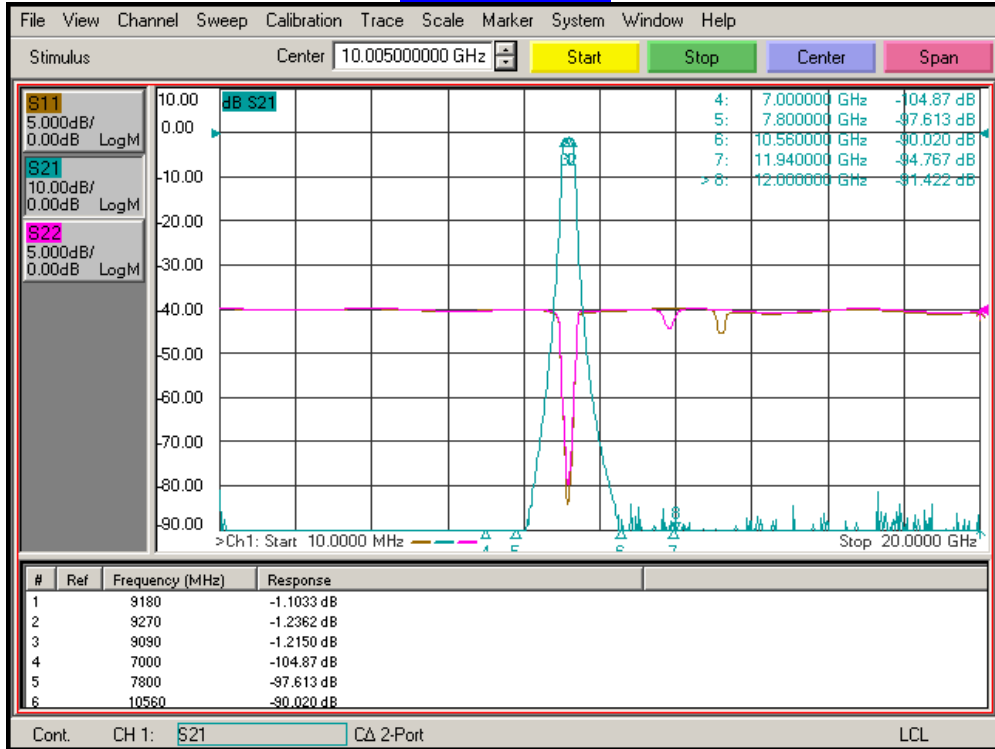

Narrow-Band Plot

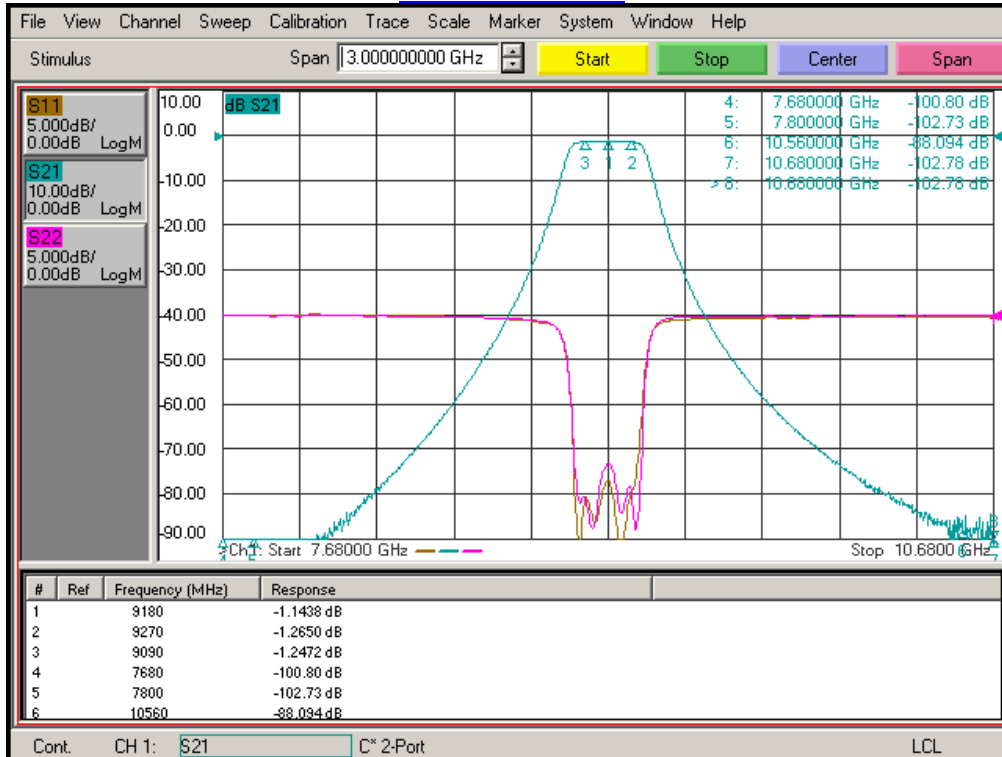



**SUMMARY TEST DATA
ON
5CL9D18G-180-CD-SFF**

Phase Linearity

