



**SUMMARY TEST DATA
ON
7CL1500-60-CD-SFF**



Customer: _____ Tested By: S. PALACIO
SO No: _____ Temperature: +25°C
Model No: 7CL1500-60-CD-SFF Date: 8/29/2014
Serial No: PL15720/1433 Drawing No: 27609647 Rev: A1
Part No: _____

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Center Frequency:	1500 MHz Nom.	1500 MHz (See Plot)	
2	3 dB Pass band Bandwidth:	60 MHz Min.	60MHz (See Plot)	
3	Pass band VSWR:	1.5:1 Max	1.28:1 (See Plot)	
4	Passband Insertion Loss:	7 dB Max	2.30dB (See Plot)	
5	Loss Ripple (peak to peak):	0.5 dB Max	0.1dB (See Plot)	
6	Rejection:	60 dB DC – 1380 MHz Min.	64.42dB (See Plot)	
7	Rejection:	60 dB 1620 MHz–3000 MHz	75.71dB (See Plot)	
8	Input Power:	+30 dBm Max	+30dBm (See Plot)	
9	Impedance (Source Load):	50 ohms Nom.	Pass	

QA/QC Approval: _____ Date: _____



**SUMMARY TEST DATA
ON
7CL1500-60-CD-SFF**

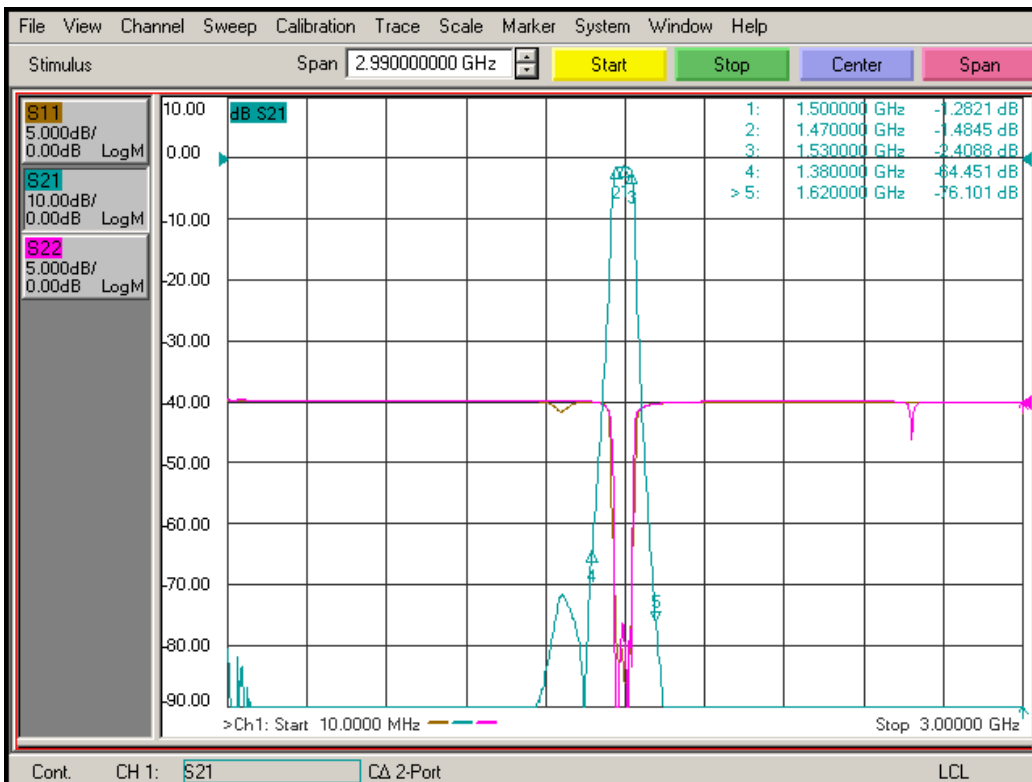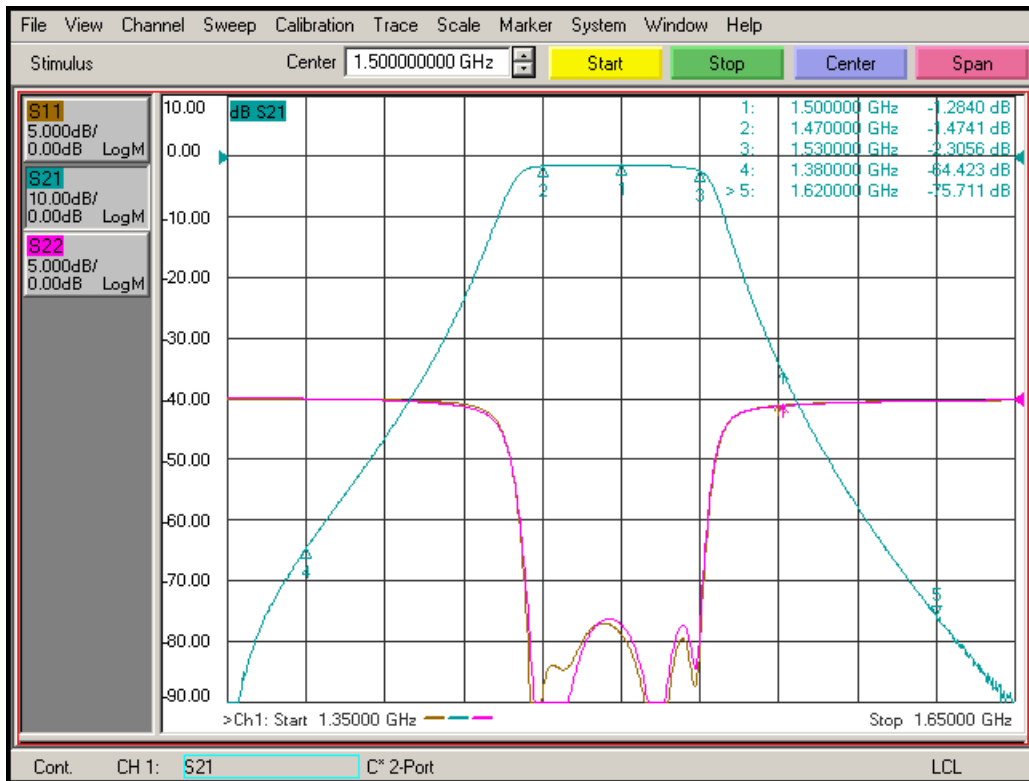

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com