



**SUMMARY TEST DATA  
ON  
POB-16-48-22-LCA**


Customer: \_\_\_\_\_ Tested By: J.Emperador  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: POB-16-48-22-LCA Date: 07/07/15  
Serial No: PL17430/1528 Drawing No: POB-16-48-22-LCA Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	4.0 to 8.0 GHz	4.0 to 8.0 GHz See Plot	
2	Gain:	+16 dB Typ.	18.5 dB See Plot	
3	Gain Flatness:	±1.0 dB Typ.	+/-0.12 dB See Plot	
4	Noise Figure:	3.0 dB Typ.	2.99 dB See Plot	
5	OP1dB:	+20dBm Min. +22dBm Typ.	21.62 dBm 22.42 dBm See Plot	
6	VSWR Input/Output:	2.0:1 Typ	1.38:1/1.44:1 See Plot	
7	DC Supply:	+12VDC @ 225mA Typ.	+12VDC @ 153.5mA	

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_




**SUMMARY TEST DATA  
ON  
POB-16-48-22-LCA**

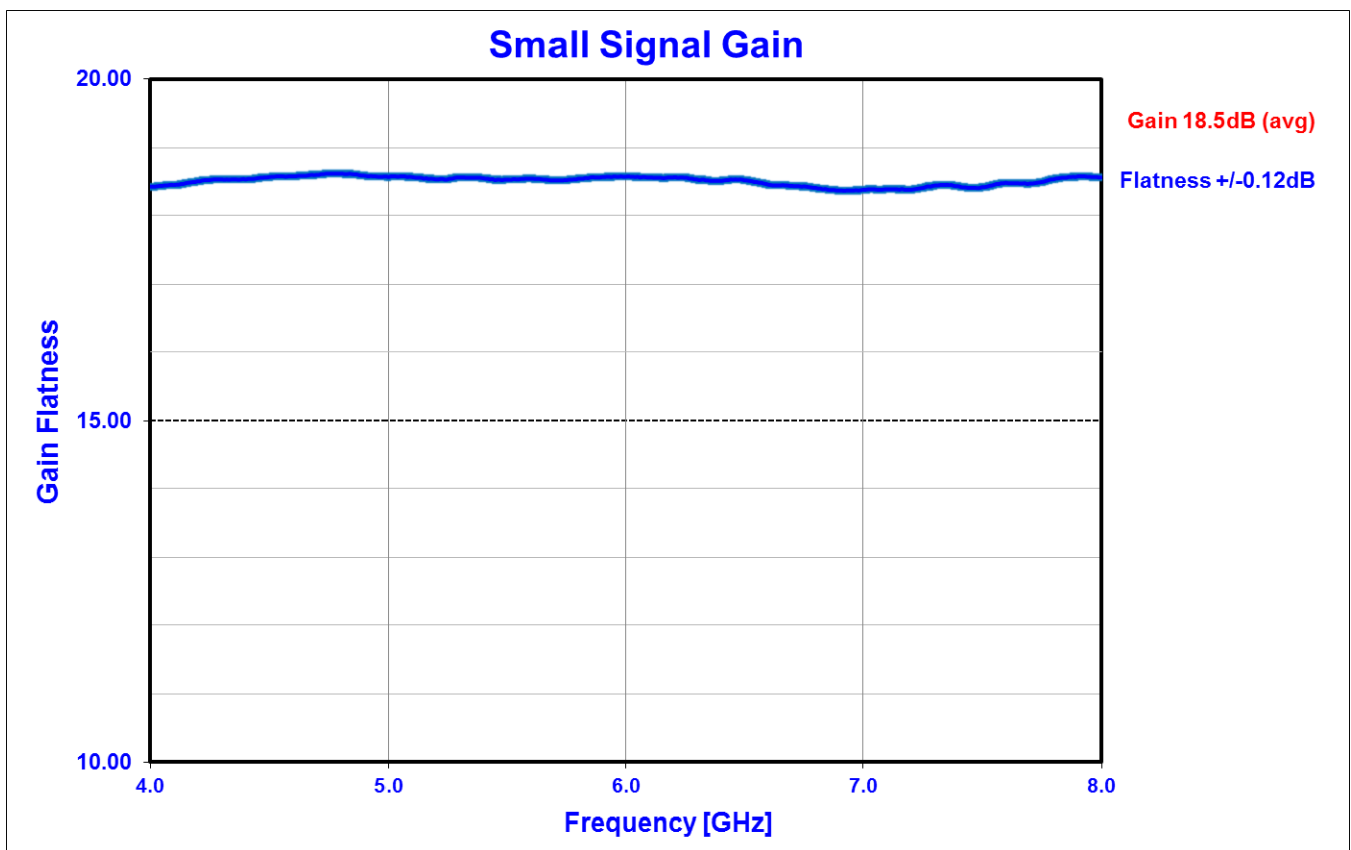




**SUMMARY TEST DATA  
ON  
POB-16-48-22-LCA**

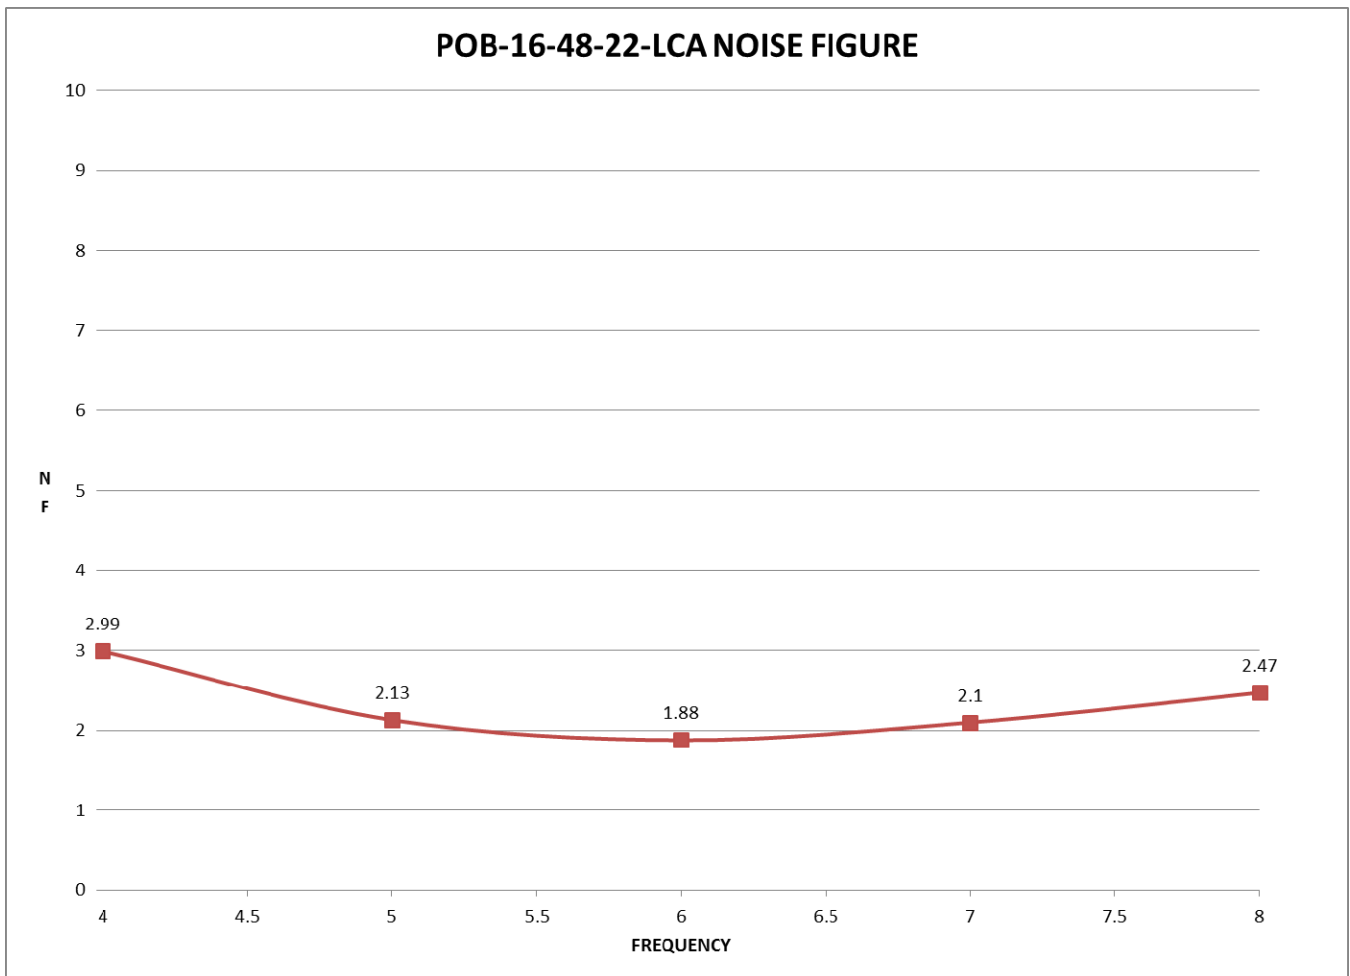



**SUMMARY TEST DATA  
ON  
POB-16-48-22-LCA**

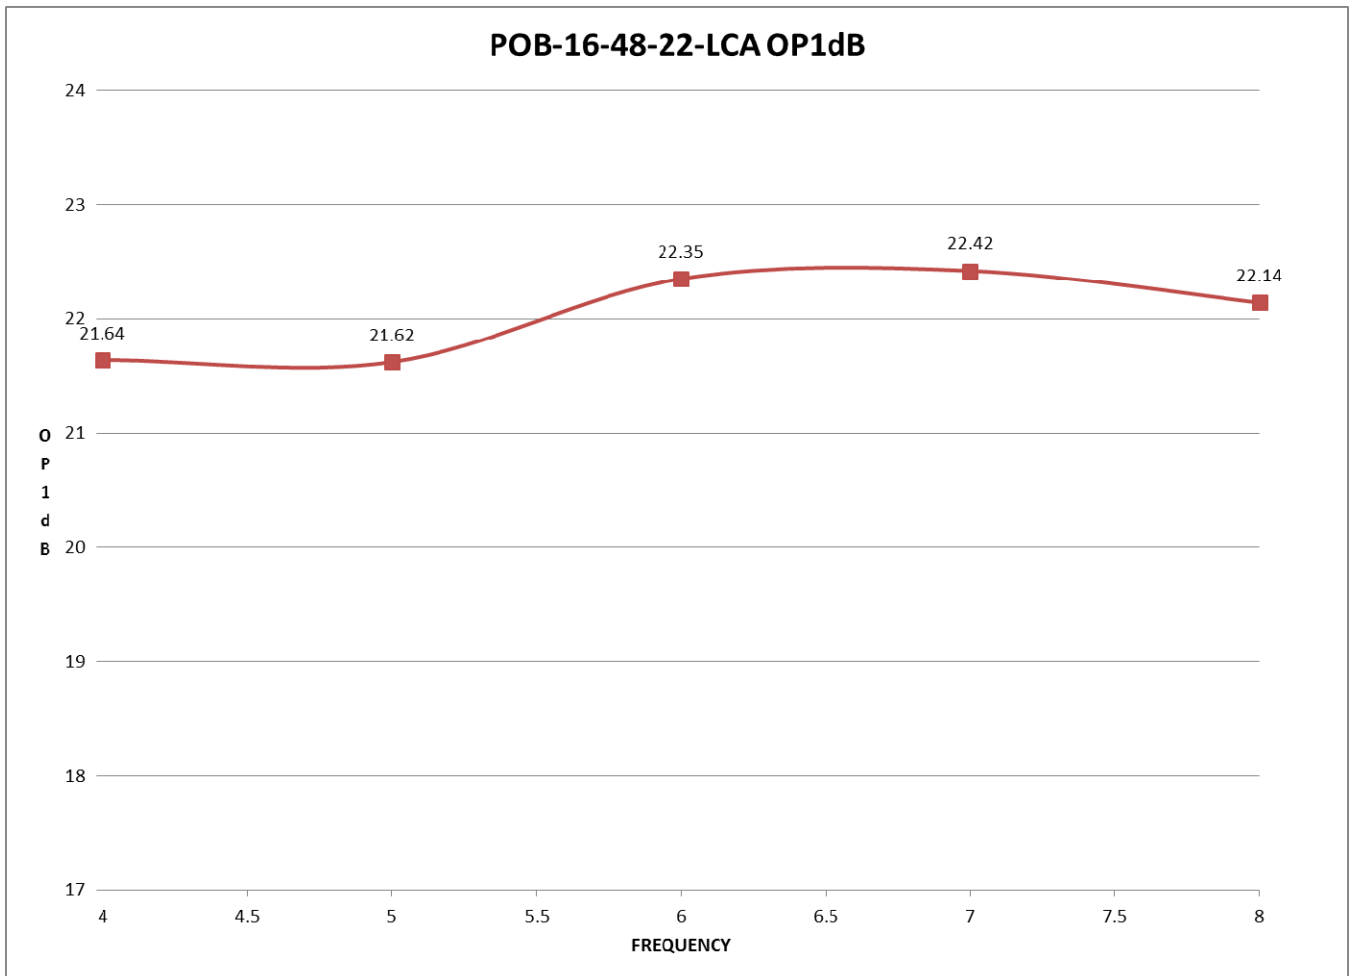



**SUMMARY TEST DATA  
ON  
POB-16-48-22-LCA**

