



**SUMMARY TEST DATA  
ON  
SBA-218-6**

S/N: PL17751/1535

<b>Customer:</b> _____	<b>Tested By:</b> <u>K. Mansfield</u>
<b>SO No:</b> _____	<b>Temperature:</b> <u>+25°C</u>
<b>Model No:</b> <u>SAA-218-6-093-13542 Opt. HERM</u>	<b>Date:</b> <u>07/01/15</u>
<b>Serial No:</b> <u>PL17751/1535</u>	<b>Drawing No:</b> <u>27613491</u> <b>Rev:</b> <u>A2</u>

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	PL17390	QA QC
1	Frequency Range:	2 to 18 GHz	<b>2 to 18 GHz See Plot</b>	
2	Logic High Voltage, VH:	2.0 V Min 3.5 V Max	<b>2.0 V</b>	
3	Logic Low Voltage, VL:	0 V Min 0.8 V Max	<b>0.8 V</b>	
4	Current at VH:	0 mA Min 24 mA Max	<b>20 mA</b>	
5	Current at VL:	0 mA Min 24 mA Max	<b>0.06 mA</b>	
6	Load Capacitance:	0 pF Min 35 pF Max	<b>&lt; 35 pF</b>	
7	Rise Time:	1.0 ns Min 2.0 ns Typ 10.0 ns Max	<b>4 ns See Plot</b>	
8	Fall Time:	1.0 ns Min 2.0 ns Typ 10.0 ns Max	<b>6 ns See Plot</b>	
9	Response Time:	100 ns Max (50% Voltage of input logic signal to 1 dB of final value of RF Attenuation)	<b>27 ns See Plot</b>	
10	Repetition Rate:	Support Switching from DC to 500 kHz	<b>500 KHz</b>	
11	Insertion Loss:	"1 = 2 dB Insertion Loss" "0 = 20 dB Insertion Loss"	<b>Pass</b>	



**SUMMARY TEST DATA  
ON  
SBA-218-6**

S/N: PL17751/1535

12	Tolerance and Flatness:	<p style="text-align: center;">Low Loss: +1 dB, -2 dB (IL of 1dB to 4dB)</p> <p style="text-align: center;">High Loss: +2 dB, -2 dB (IL of 18dB to 22dB)</p>	<p style="text-align: center;"><b>IL -2.6 dB -1.6 dB Flatness ±1 dB</b></p> <p style="text-align: center;"><b>-20.4 dB Flatness ±0.8 dB</b></p> <p style="text-align: center;"><b>See Plot</b></p>	
13	VSWR:	2.0:1 Max	<b>1.9:1 See Plot</b>	
14	Output 1 dB Compression:	18 dBm	<b>&gt;23 dBm See Plot</b>	
16	Stability:	< -70 dBm Spurious Output Signal *	<b>-71.3 dBm See Plot</b>	
17	Video Spike Leakage:	< 500 mV Peak to Peak (Measured with a min bandwidth of 200 MHz)	<b>127 mV See Plot</b>	
18	Spectral Activity:	-70 dBm Max	<b>-75.3 dBm See Plot</b>	
19	DC Voltage:	+5 VDC @ 60 mA Max -5 VDC @ 50 mA Max	<b>+5VDC @ 58 mA -5VDC @ 47 mA</b>	

\*Should be unconditionally stable per the following conditions: A, B, C

A. With any input or output port terminated in any passive source or load impedance

B. With input power levels ranging from no input to the maximum that is specified on Table 1 (see Outline drawing)

C. With any operating temperature specified in Table 1 (see Outline drawing)

\*\*AC Ripple Frequency is 600 kHz Typical


**QA/QC Approval:** \_\_\_\_\_ **Date:** \_\_\_\_\_



**SUMMARY TEST DATA  
ON  
SBA-218-6**

S/N: PL17751/1535

**Switching Speed**

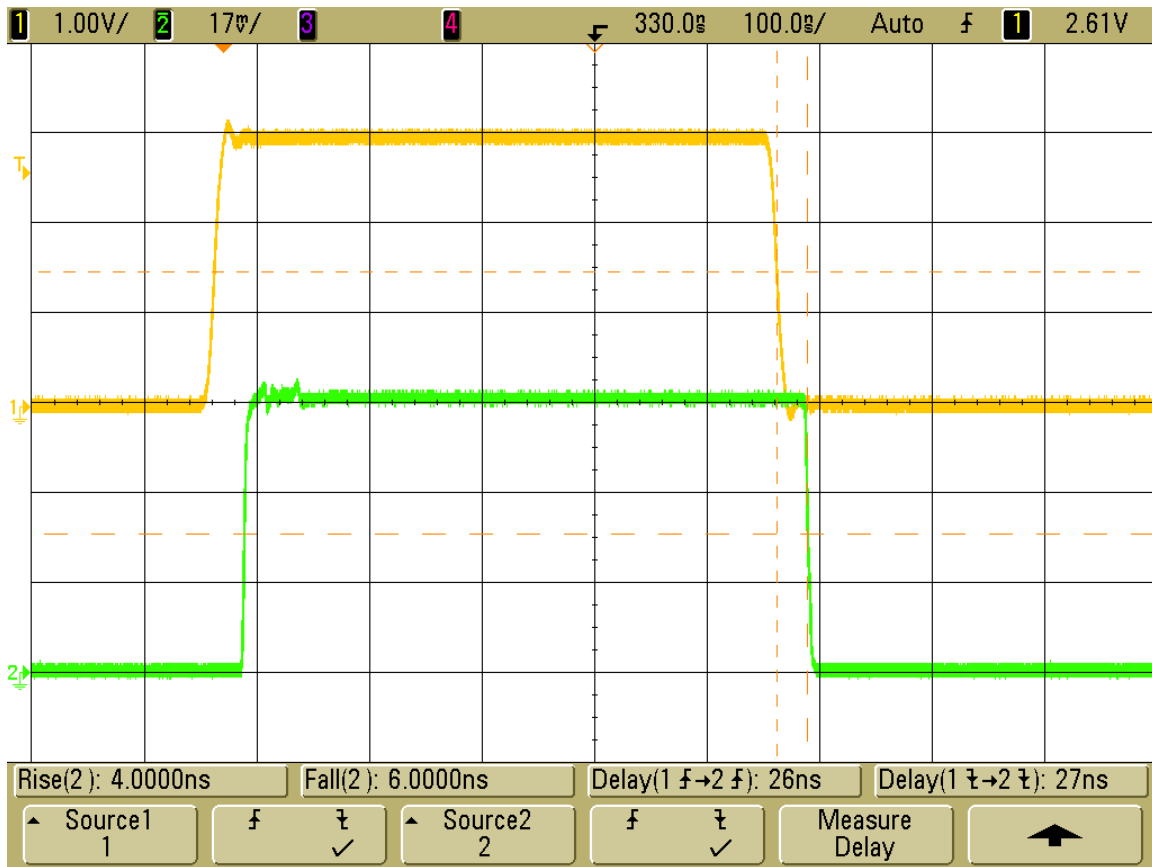


**Yellow: TTL  
Green: RF**




## SUMMARY TEST DATA ON SBA-218-6

S/N: PL17751/1535

### Low Loss

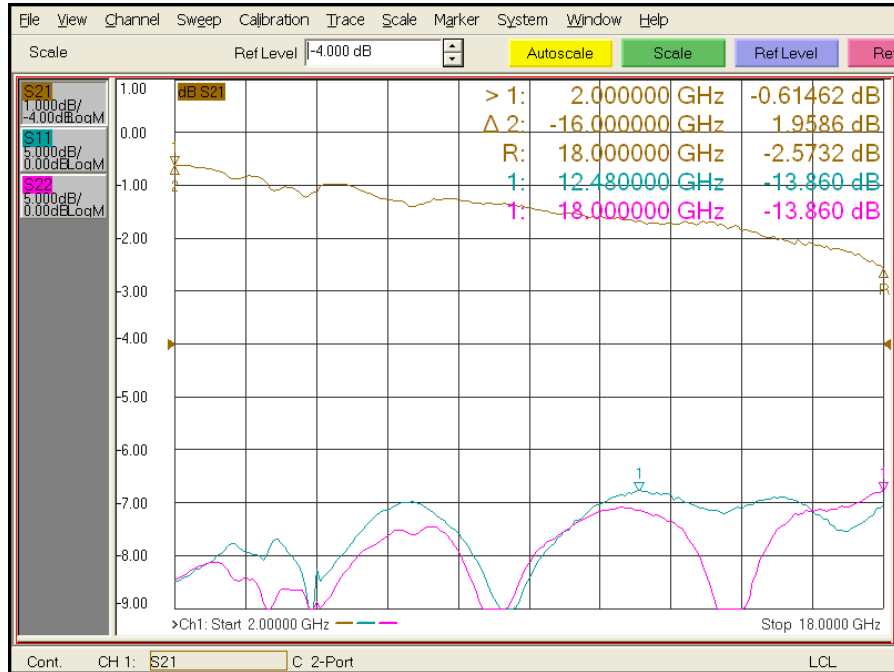

### High Loss

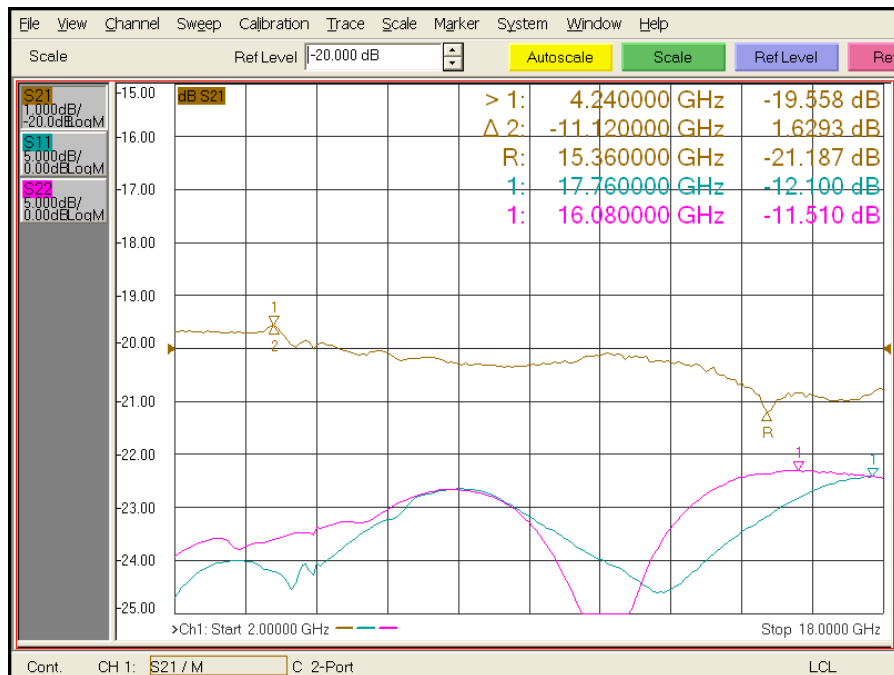





**SUMMARY TEST DATA  
ON  
SBA-218-6**

S/N: PL17751/1535

**Output 1 dB Compression**

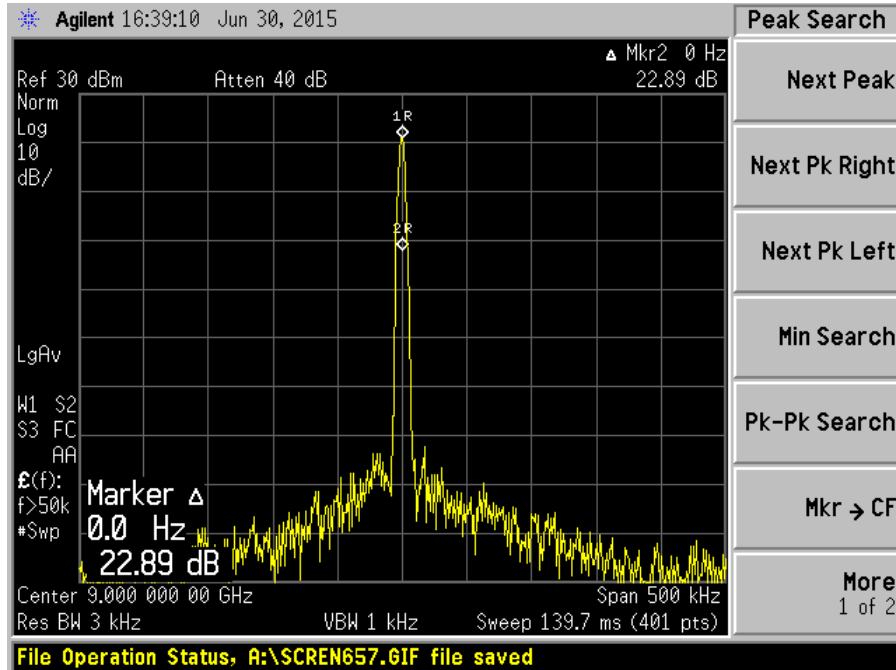

**Stability**

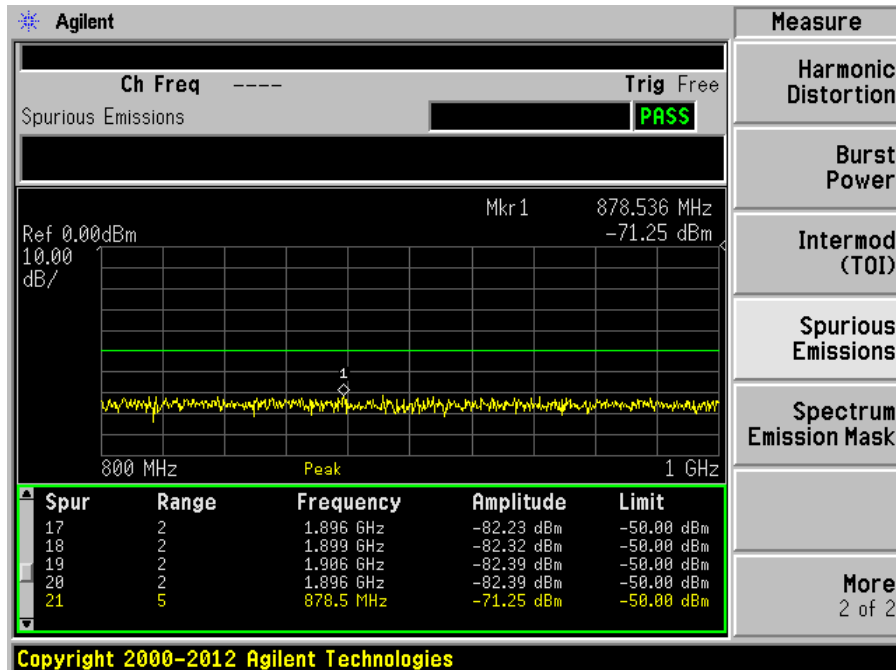




# SUMMARY TEST DATA ON SBA-218-6

S/N: PL17751/1535

## Video Spike Leakage

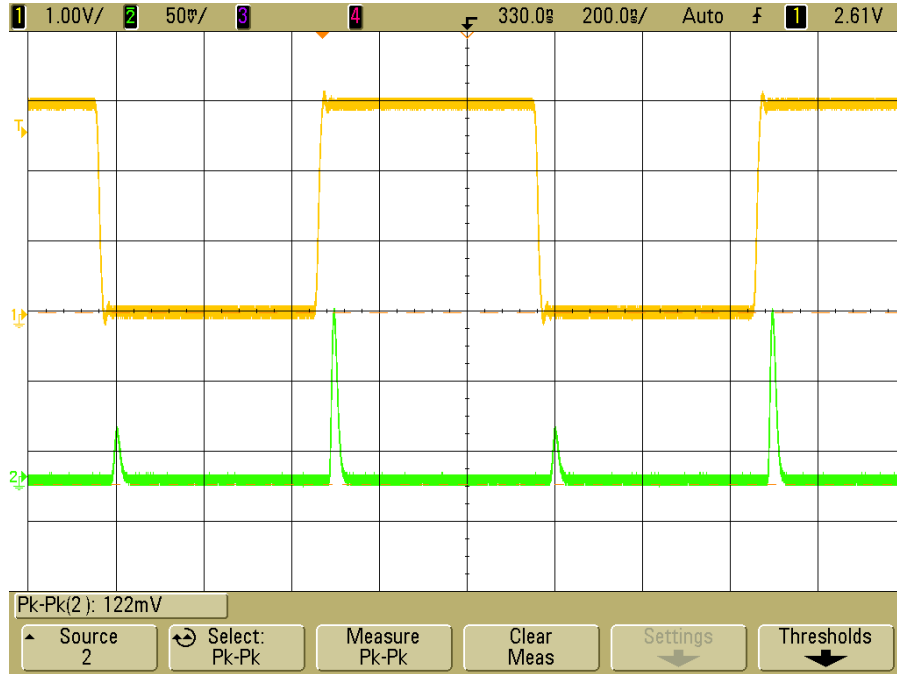

## Spectral Activity

