



**SUMMARY TEST DATA
ON
DP-5700M-6500M-CD-SFF**

PL18427/1601

Customer: _____ Tested By: Jerry N.
SO No: _____ Temperature: +25°C
Model No: DP-5700M-6500M-CD-SFF Date: 1/4/16
Serial No: PL18427/1601 Drawing No: 27628364 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Low Passband (BPF1)	5.7 GHz TO 6.5 GHz MIN	5.7 GHz TO 6.5 GHz (see plot)	
2	High Passband (BPF2)	13.75 GHz TO 14.5 GHz MIN	13.75 GHz TO 14.5 GHz (see plot)	
3	Insertion Loss(Passband)	≤ 1 dB	1.66 dB (see plot)	
4	VSWR(Passband)	2.0 : 1 TYP	1.45 : 1 (see plot)	
5	CH to CH Isolation	≥ 70 dB	86.87 dB (see plot)	


QA/QC Approval: _____ Date: _____



**SUMMARY TEST DATA
ON
DP-5700M-6500M-CD-SFF**

PL18427/1601

Low Passband (BPF1)

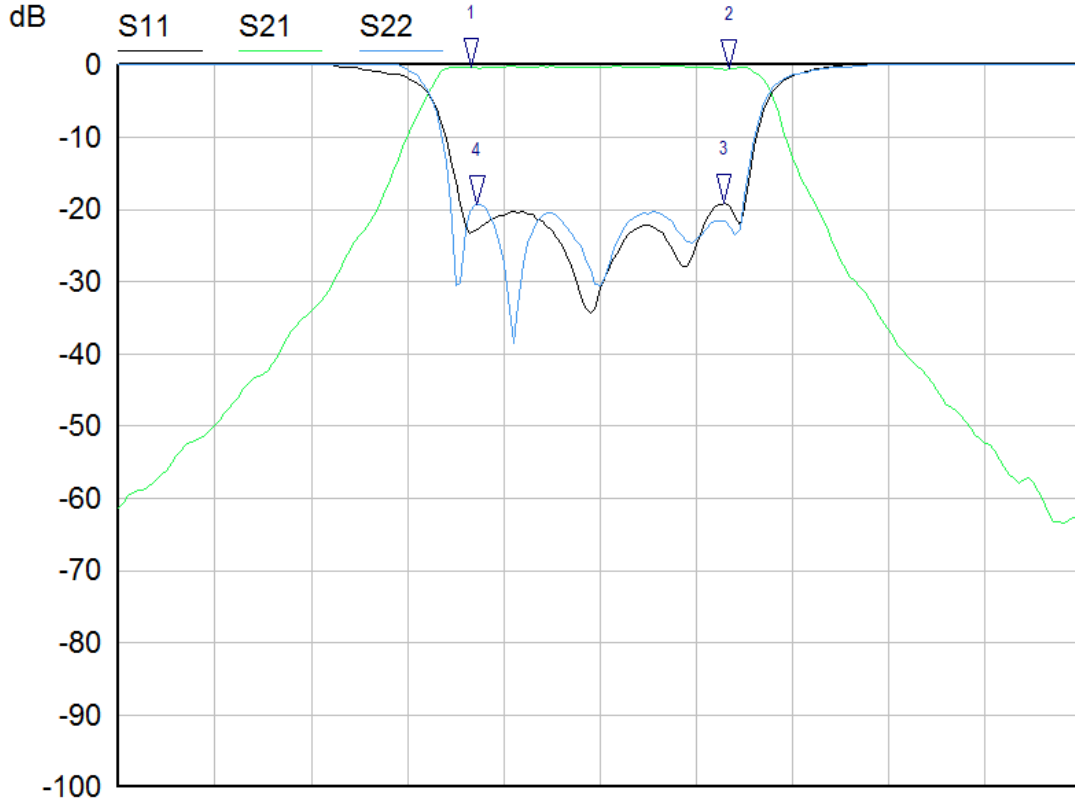

Start: 4.6000 GHz

Stop: 7.6000 GHz

12/28/2015 4:03:06 PM

8720C


Mkr	Trace	X-Axis	Value	Notes
1 ▾	S21	5.7000 GHz	-0.35 dB	
2 ▾	S21	6.5000 GHz	-0.58 dB	
3 ▾	S11	6.4850 GHz	-19.24 dB	
4 ▾	S22	5.7160 GHz	-19.27 dB	



**SUMMARY TEST DATA
ON
DP-5700M-6500M-CD-SFF**

PL18427/1601

High Passband (BPF2)

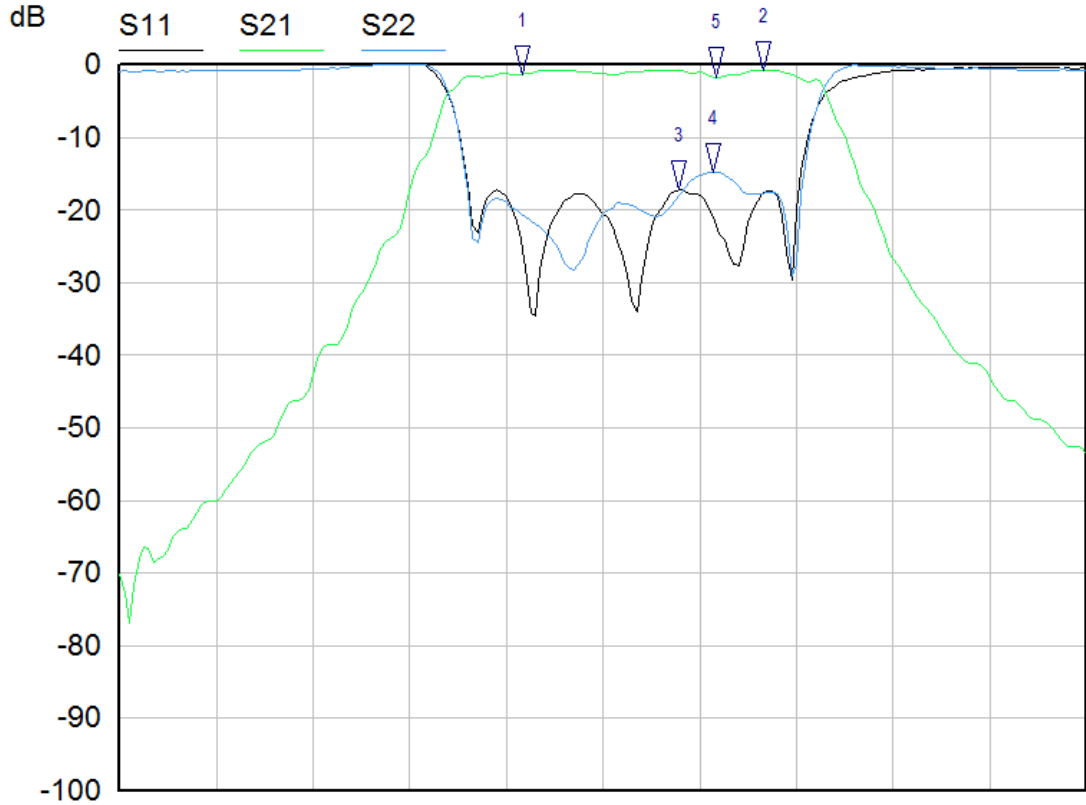

Start: 12.5000 GHz

Stop: 15.5000 GHz

12/28/2015 3:58:24 PM

8720C

Mkr	Trace	X-Axis	Value	Notes
1 ▾	S21	13.7500 GHz	-1.31 dB	
2 ▾	S21	14.5000 GHz	-0.78 dB	
3 ▾	S11	14.2350 GHz	-17.24 dB	
4 ▾	S22	14.3400 GHz	-14.79 dB	
5 ▾	S21	14.3500 GHz	-1.66 dB	



**SUMMARY TEST DATA
ON
DP-5700M-6500M-CD-SFF**

PL18427/1601

CH to CH Isolation

