



**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**


Customer: \_\_\_\_\_ Tested By: Jian Xu  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: BPF-11D825D-1D85G-60DB-SFF Date: 05/17/17  
Serial No: PL21050/1720 Drawing No: 27631281 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Center Frequency:	11.825 GHz	<b>11.825 GHz</b>	
2	1 dB Bandwidth	1850 MHz	<b>1850MHz</b>	
3	VSWR Over 90% of the Passband:	2.0 :1 MAX	<b>2.0:1 MAX</b>	
4	1dB Passband Insertion Loss:	3 dB MAX	<b>2.9 dB</b>	
5	Rejection	-60 dBc MIN 9.15 - 9.9 GHz -60 dBc MIN 13.75 - 14.5 GHz	-70 dBc MIN 9.15 - 9.9 GHz -62 dBc MIN 13.75 - 14.5 GHz	

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_



**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**

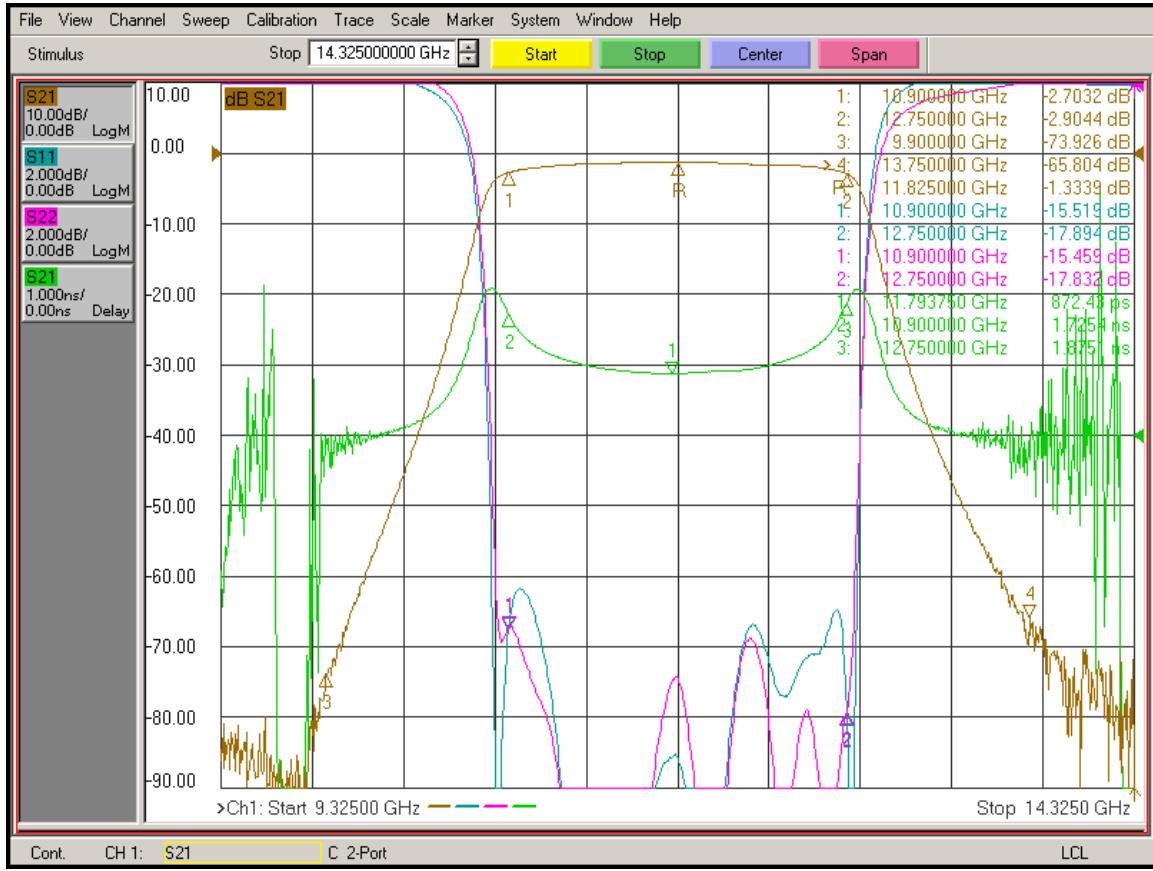

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)



**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**

Customer: \_\_\_\_\_ Tested By: Jian Xu  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: BPF-11D825D-1D85G-60DB-SFF Date: 05/17/17  
Serial No: PL21051/1720 Drawing No: 27631281 Rev: A1


TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Center Frequency:	11.825 GHz	<b>11.825 GHz</b>	
2	1 dB Bandwidth	1850 MHz	<b>1850MHz</b>	
3	VSWR Over 90% of the Passband:	2.0 :1 MAX	<b>2.0:1 MAX</b>	
4	1dB Passband Insertion Loss:	3 dB MAX	<b>2.88 dB</b>	
5	Rejection	-60 dBc MIN 9.15 - 9.9 GHz -60 dBc MIN 13.75 - 14.5 GHz	-70 dBc MIN 9.15 - 9.9 GHz -62 dBc MIN 13.75 - 14.5 GHz	

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)




**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**

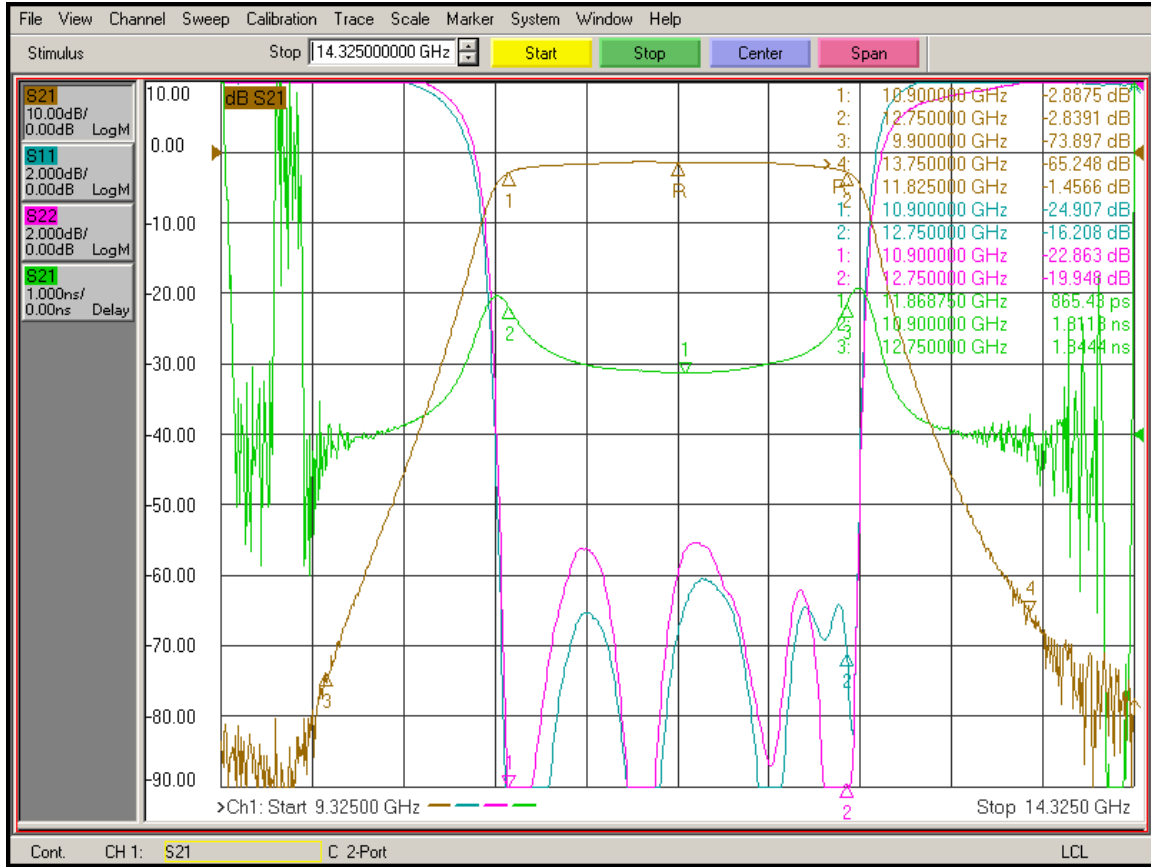

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)



**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**

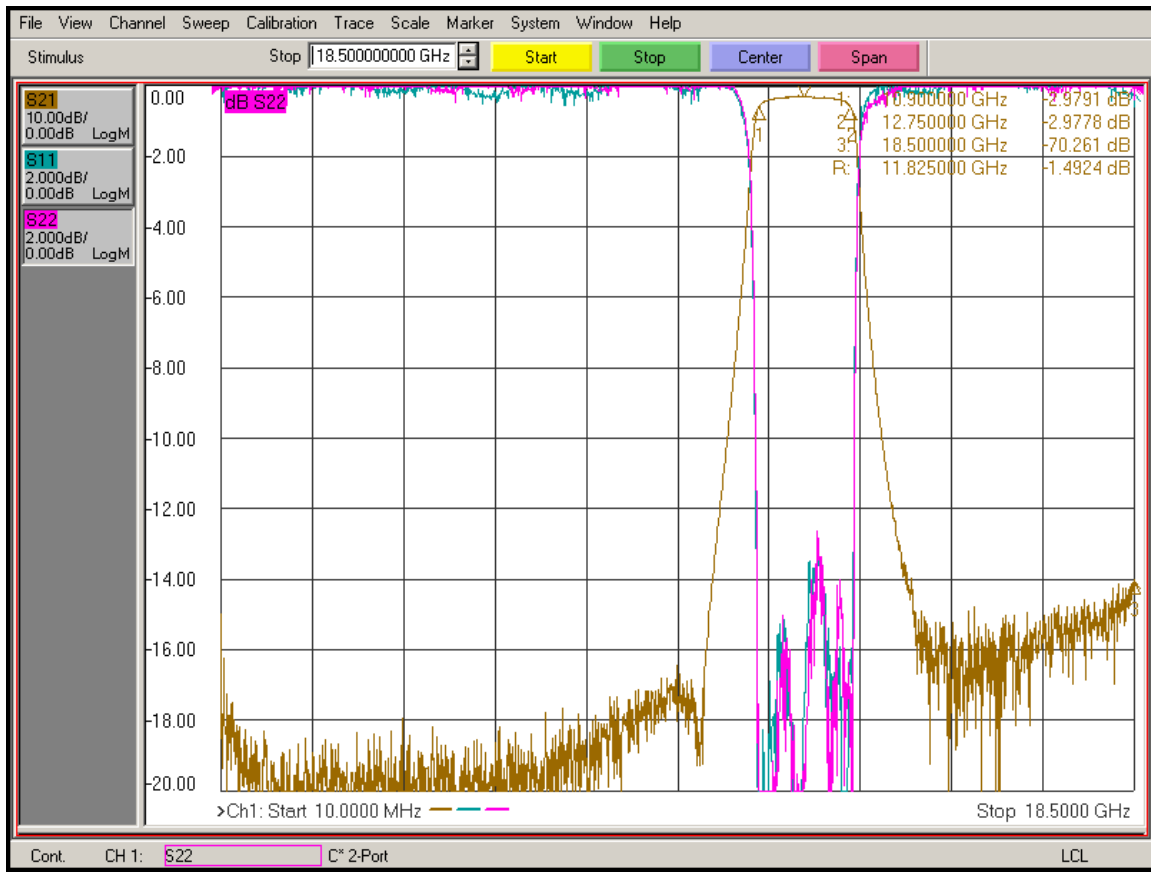



**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**

Customer: _____	Tested By: <u>Jian Xu</u>
SO No: _____	Temperature: <u>+25°C</u>
Model No: <u>BPF-11D825D-1D85G-60DB-SFF</u>	Date: <u>05/17/17</u>
Serial No: <u>PL21052/1720</u>	Drawing No: <u>27631281</u> Rev: <u>A1</u>


TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Center Frequency:	11.825 GHz	11.825 GHz	
2	1 dB Bandwidth	1850 MHz	1850MHz	
3	VSWR Over 90% of the Passband:	2.0 :1 MAX	2.0:1 MAX	
4	1dB Passband Insertion Loss:	3 dB MAX	2.7 dB	
5	Rejection	-60 dBc MIN 9.15 - 9.9 GHz -60 dBc MIN 13.75 - 14.5 GHz	-62 dBc MIN 9.15 - 9.9 GHz -61 dBc MIN 13.75 - 14.5 GHz	

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)




**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**

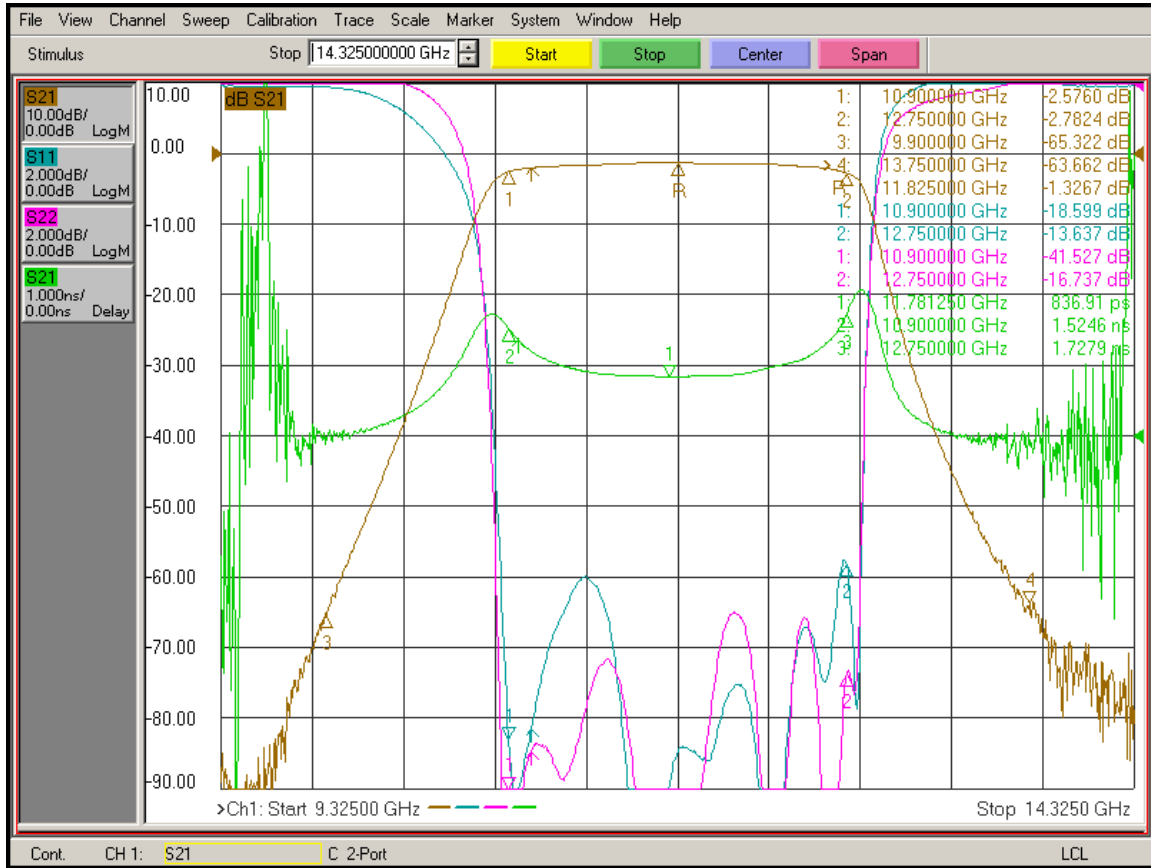

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)



**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**

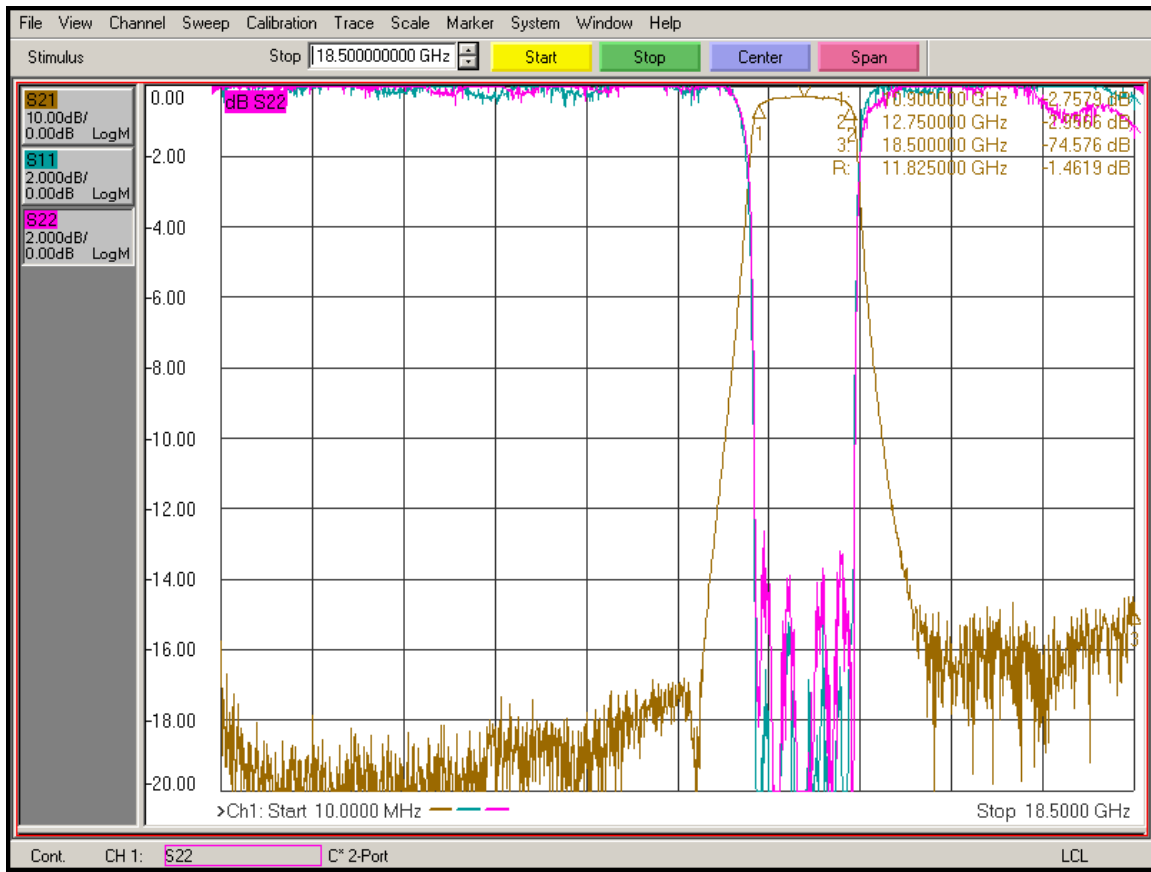



**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**


Customer: \_\_\_\_\_ Tested By: Jian Xu  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: BPF-11D825D-1D85G-60DB-SFF Date: 05/17/17  
Serial No: PL21053/1720 Drawing No: 27631281 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Center Frequency:	11.825 GHz	<b>11.825 GHz</b>	
2	1 dB Bandwidth	1850 MHz	<b>1850MHz</b>	
3	VSWR Over 90% of the Passband:	2.0 :1 MAX	<b>2.0:1 MAX</b>	
4	1dB Passband Insertion Loss:	3 dB MAX	<b>2.85 dB</b>	
5	Rejection	-60 dBc MIN 9.15 - 9.9 GHz -60 dBc MIN 13.75 - 14.5 GHz	-68 dBc MIN 9.15 - 9.9 GHz -61 dBc MIN 13.75 - 14.5 GHz	

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_



**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**

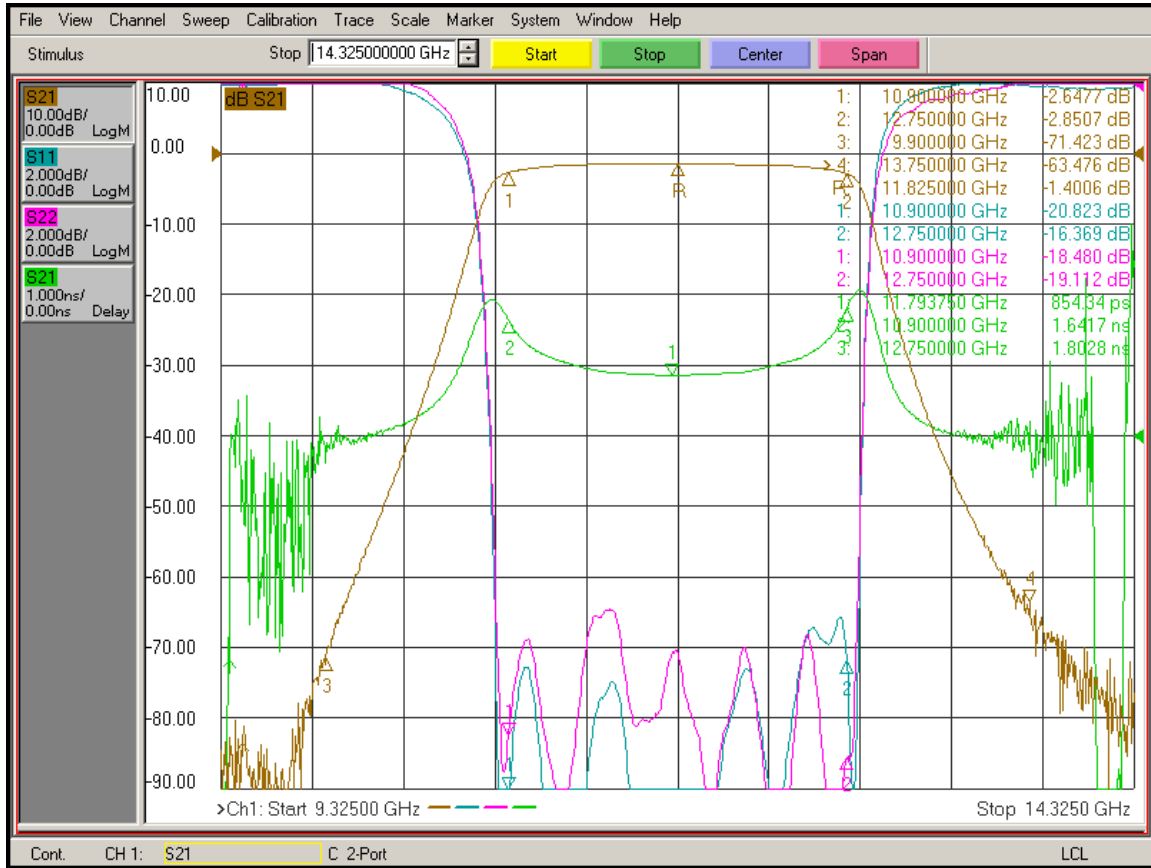

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)



**SUMMARY TEST DATA  
ON  
BPF-11D825D-1D85G-60DB-SFF**

