



**SUMMARY TEST DATA  
ON  
8CL1860-40-CD-SFF**

**PL21795/1745**

Customer: \_\_\_\_\_ Tested By: J. Wood  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: 8CL1860-40-CD-SFF Date: 11/3/17  
Serial No: PL21795/1745 Drawing No: 27609705 Rev: A1  
Part No: \_\_\_\_\_

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Center Frequency:	1860 MHz Nom.	1860 MHz (See Plot)	PMI QA 2
2	3 dB Pass band Bandwidth:	40 MHz Min.	>40 MHz (See Plot)	
3	Pass band VSWR:	1.5:1 Max	1.246:1 (See Plot)	
4	Passband Insertion Loss:	7 dB Max	3.5 dB (See Plot)	
5	Loss Ripple (peak to peak):	0.5 dB Max	0.2 dB (See Plot)	
6	Rejection:	60 dB DC – 1800 MHz Min.	68.9 dB (See Plot)	
7	Rejection:	60 dB 1920 MHz–4000 MHz	70.5 dB (See Plot)	
8	Impedance (Source Load):	50 ohms Nom.	Pass	PMI QA 2

QA/QC Approval: \_\_\_\_\_

PMI  
QA 2



Date: \_\_\_\_\_

11/10/17



**SUMMARY TEST DATA  
ON  
8CL1860-40-CD-SFF**

**PL21795/1745**

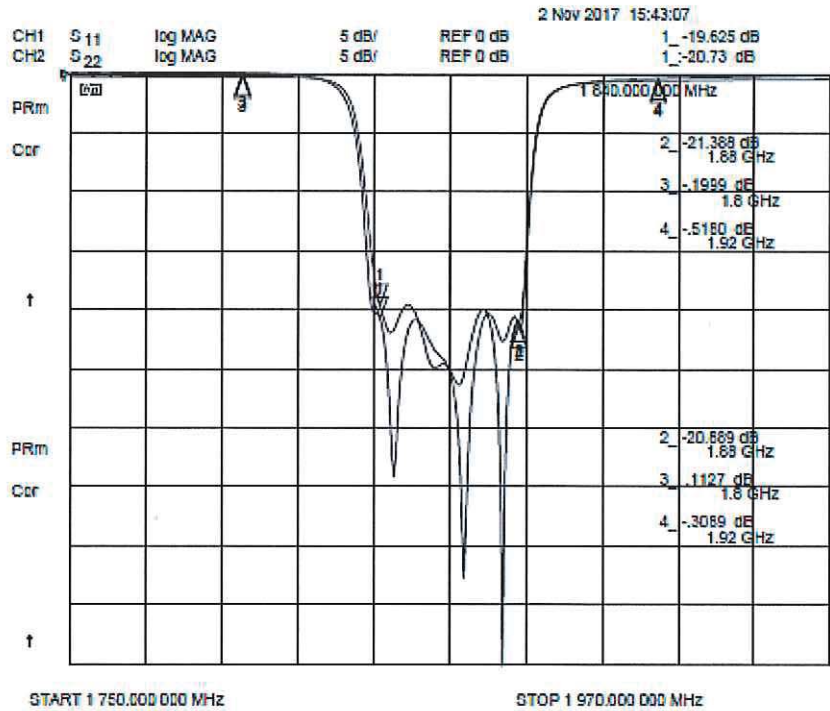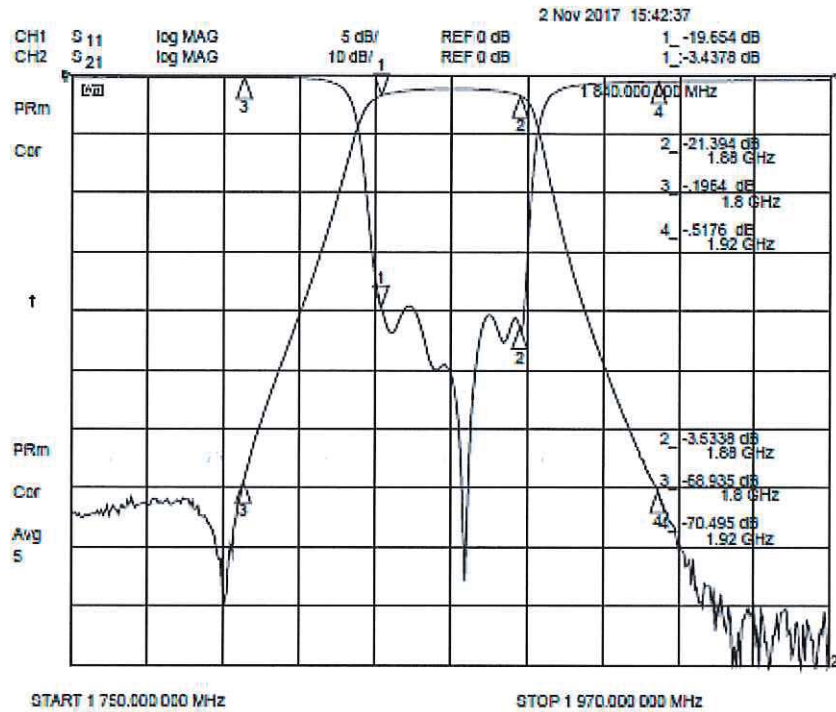



**SUMMARY TEST DATA  
ON  
8CL1860-40-CD-SFF**

**PL21795/1745**

