



**SUMMARY TEST DATA  
ON  
7CL1500-60-CD-SFF**

**PL21798/1745**

Customer: \_\_\_\_\_ Tested By: J. Wood  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: 7CL1500-60-CD-SFF Date: 11/3/17  
Serial No: PL21798/1745 Drawing No: 27609647 Rev: A1  
Part No: \_\_\_\_\_



TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Center Frequency:	1500 MHz Nom.	1500 MHz (See Plot)	PMI QA 2
2	3 dB Pass band Bandwidth:	60 MHz Min.	>60 MHz (See Plot)	
3	Pass band VSWR:	1.5:1 Max	1.308:1 (See Plot)	
4	Passband Insertion Loss:	7 dB Max	1.8 dB (See Plot)	
5	Loss Ripple (peak to peak):	0.5 dB Max	0.2 dB (See Plot)	
6	Rejection:	60 dB DC – 1380 MHz Min.	70.0 dB (See Plot)	
7	Rejection:	60 dB 1620 MHz–3000 MHz	78.1 dB (See Plot)	
8	Input Power:	+30 dBm Max	+30 dBm See Typical Characteristics	
9	Impedance (Source Load):	50 ohms Nom.	Pass	PMI QA 2

QA/QC Approval:  PMI QA 2 Date: 11/10/17



**SUMMARY TEST DATA  
ON  
7CL1500-60-CD-SFF**

**PL21798/1745**

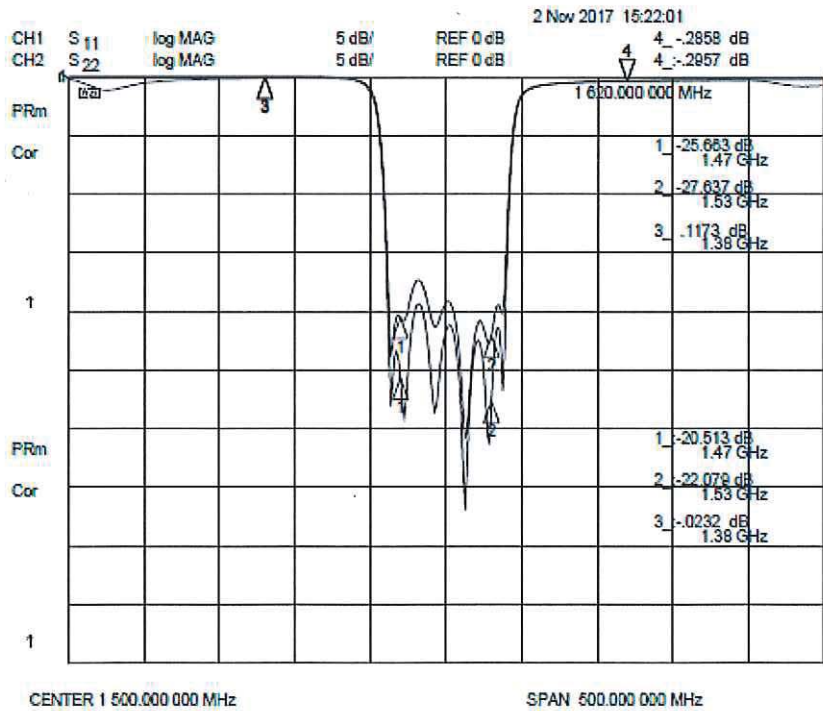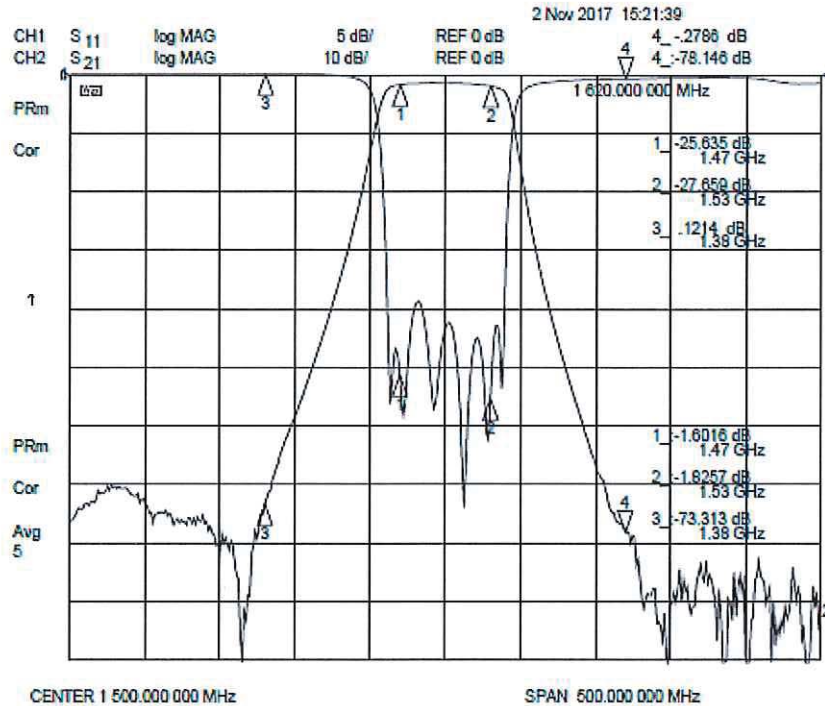



**SUMMARY TEST DATA  
ON  
7CL1500-60-CD-SFF**

**PL21798/1745**

