



**SUMMARY TEST DATA
ON
7CL1500-60-CD-SFF**

PL21799/1745

Customer: _____ Tested By: J. Wood
SO No: _____ Temperature: +25°C
Model No: 7CL1500-60-CD-SFF Date: 11/3/17
Serial No: PL21799/1745 Drawing No: 27609647 Rev: A1
Part No: _____

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Center Frequency:	1500 MHz Nom.	1500 MHz (See Plot)	PMI QA 2
2	3 dB Pass band Bandwidth:	60 MHz Min.	>60 MHz (See Plot)	
3	Pass band VSWR:	1.5:1 Max	1.284:1 (See Plot)	
4	Passband Insertion Loss:	7 dB Max	1.9 dB (See Plot)	
5	Loss Ripple (peak to peak):	0.5 dB Max	0.2 dB (See Plot)	
6	Rejection:	60 dB DC – 1380 MHz Min.	68.7 dB (See Plot)	
7	Rejection:	60 dB 1620 MHz–3000 MHz	79.3dB (See Plot)	
8	Input Power:	+30 dBm Max	+30 dBm See Typical Characteristics	
9	Impedance (Source Load):	50 ohms Nom.	Pass	PMI QA 2

QA/QC Approval: _____

PMI
QA 2



Date: _____

11/10/17



**SUMMARY TEST DATA
ON
7CL1500-60-CD-SFF**

PL21799/1745

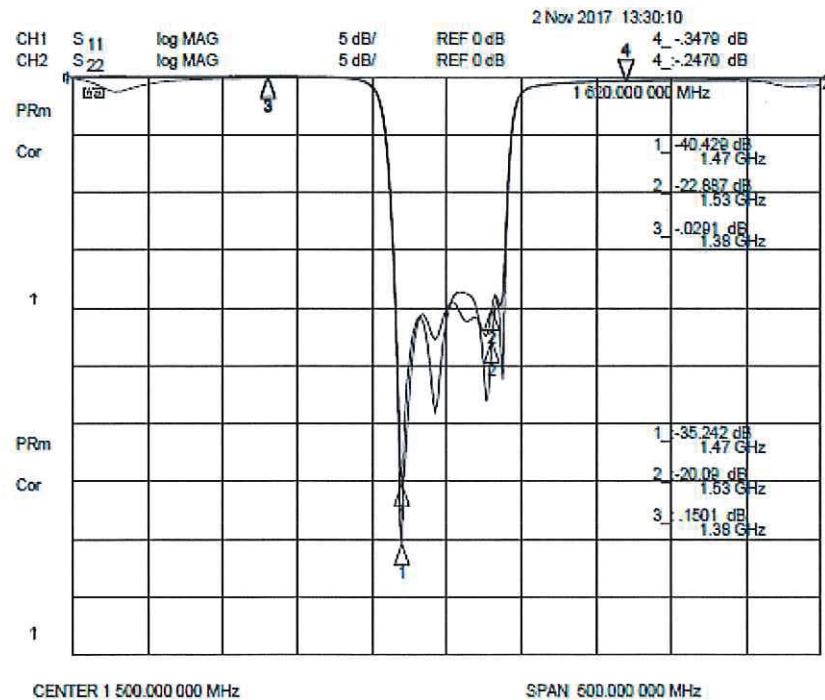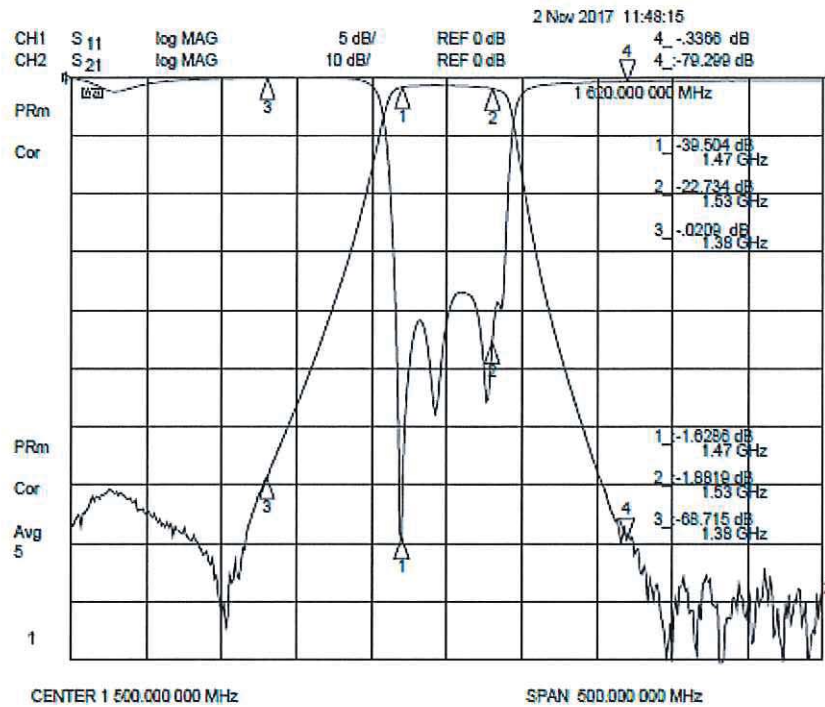



**SUMMARY TEST DATA
ON
7CL1500-60-CD-SFF**

PL21799/1745

