



**SUMMARY TEST DATA
ON
7CL1500-60-CD-SFF**

PL21800/1745

Customer: _____	Tested By: <u>J. Wood</u>	
SO No: _____	Temperature: <u>+25°C</u>	
Model No: <u>7CL1500-60-CD-SFF</u>	Date: <u>11/3/17</u>	
Serial No: <u>PL21800/1745</u>	Drawing No: <u>27609647</u>	Rev: <u>A1</u>
Part No: _____		



TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Center Frequency:	1500 MHz Nom.	1500 MHz (See Plot)	PMI QA 2
2	3 dB Pass band Bandwidth:	60 MHz Min.	>60 MHz (See Plot)	
3	Pass band VSWR:	1.5:1 Max	1.316:1 (See Plot)	
4	Passband Insertion Loss:	7 dB Max	1.8 dB (See Plot)	
5	Loss Ripple (peak to peak):	0.5 dB Max	0.2 dB (See Plot)	
6	Rejection:	60 dB DC – 1380 MHz Min.	68.0 dB (See Plot)	
7	Rejection:	60 dB 1620 MHz–3000 MHz	75.0 dB (See Plot)	
8	Input Power:	+30 dBm Max	+30 dBm See Typical Characteristics	
9	Impedance (Source Load):	50 ohms Nom.	Pass	PMI QA 2

QA/QC Approval: PMI QA 2 Date: 11/10/17



**SUMMARY TEST DATA
ON
7CL1500-60-CD-SFF**

PL21800/1745

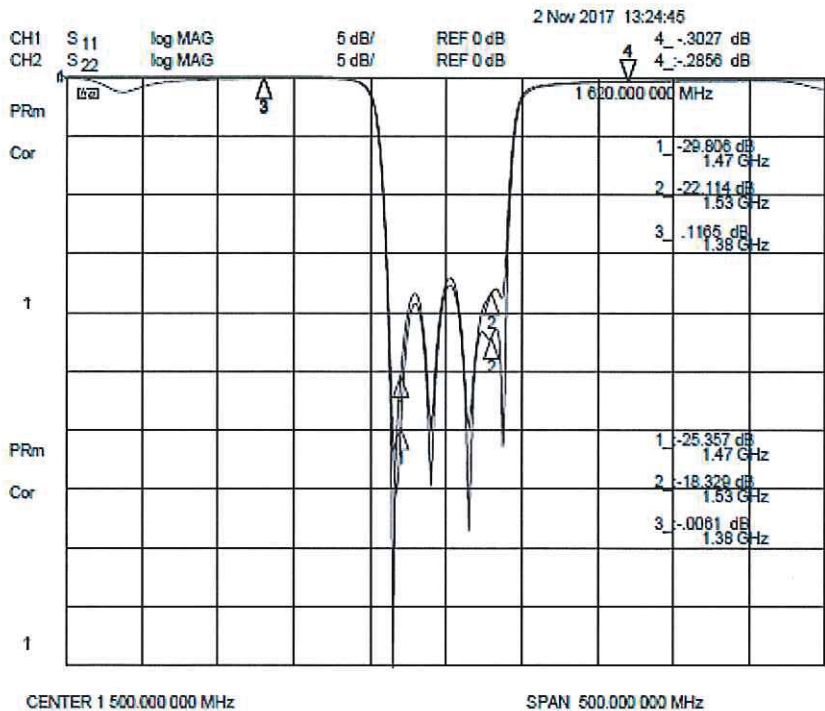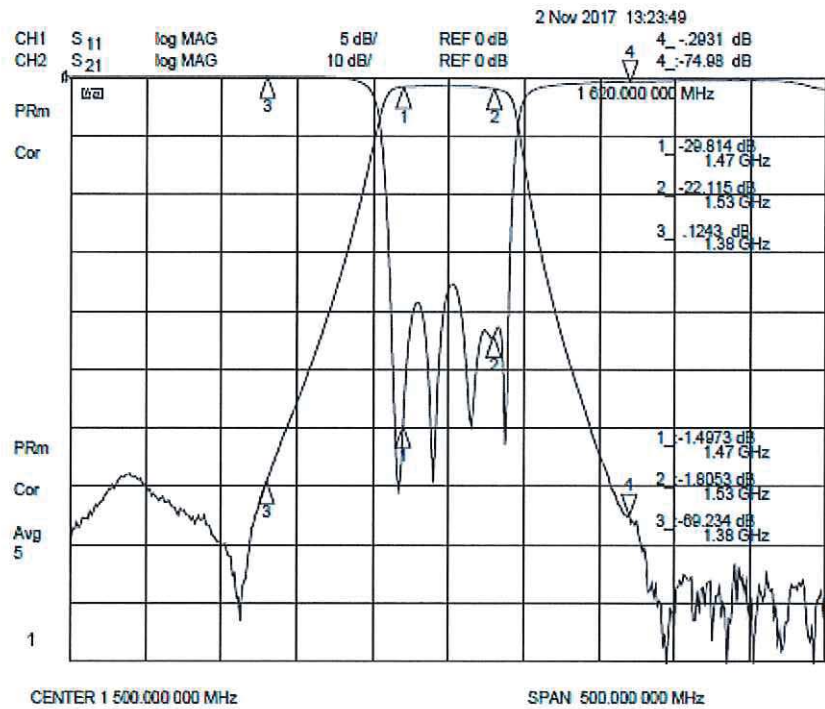



**SUMMARY TEST DATA
ON
7CL1500-60-CD-SFF**

PL21800/1745

