



**SUMMARY TEST DATA
ON
P1T-6G12G-80-T-SFF-1W**

PL21938/1751

Customer: _____ Tested By: L. McGraw
 SO No: _____ Temperature: +25°C
 Model No: P1T-6G12G-80-T-SFF-1W Date: 12/21/17
 Serial No: PL21938/1751 Drawing No: 27633390 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	6.0 to 12.0 GHz	6.0 to 12.0 GHz	
2	Insertion Loss:	1.75dB Max	1.65dB (See Plot)	
3	Isolation:	80dB Min	96dB (See Plot)	
4	VSWR:	2.0:1 Max (1.5:1 Goal)	1.7:1	
5	Switching Speed:	25ns Typ	23.8ns	
6	Operating Power:	+30dBm Max	Pass	
7	Control	TTL Logic "0" = Insertion Loss "1" = Isolation	Pass	
8	Power Supply:	+5VDC @ 50mA Max -15VDC @ 75mA Max	40mA 70mA	

QA/QC Approval: _____ Date: _____


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
P1T-6G12G-80-T-SFF-1W**

PL21938/1751

Insertion Loss – Return Loss

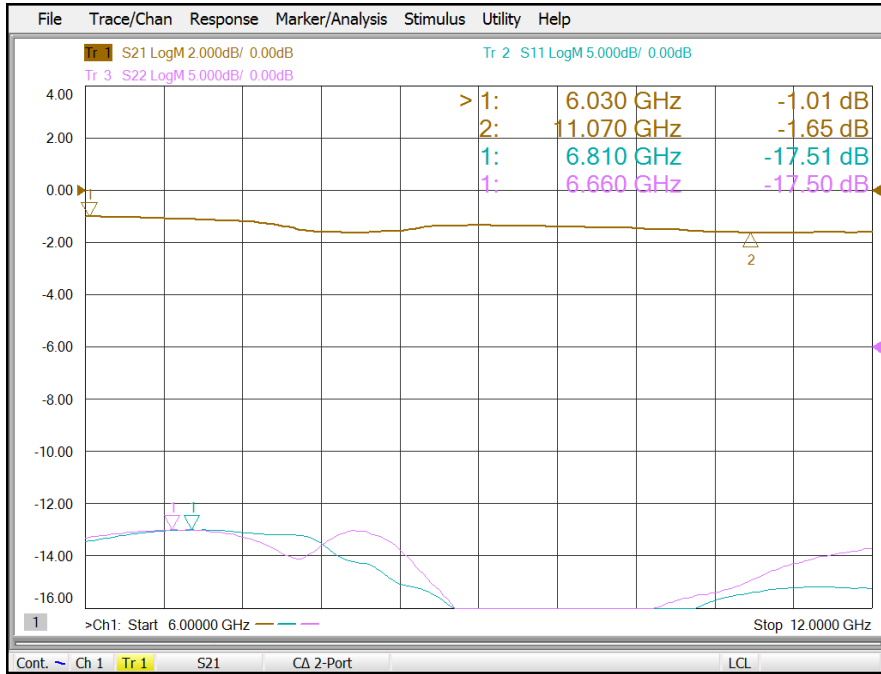

Isolation & Return Loss

