



**SUMMARY TEST DATA**  
**ON**  
**PE2-26-2G18G-5-21-12-SFF-DP**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: PE2-26-2G18G-5-21-12-SFF-DP  
 Serial No: PL22343/1812

Tested By: K. Mansfield  
 Temperatures: -55°C, +25°C, +85°C  
 Date: 4/9/2018  
 Drawing No: 27633170 Rev: B2

Test Item	Parameters	Specified Value	Results			Pass/Fail	QA QC
			-55°C	+25°C	+85°C		
1	Frequency Range:	2.0 to 18.0 GHz	2.0 to 18.0 GHz			Pass See Plots	JRP
2	Nominal Gain: <sup>1</sup>	26 dB	24.7 dB	25.6 dB	24.5 dB	Pass See Plot	
3	Gain Window:	±4.0 dB (22 dB Min. / 30 dB Max.) (Relative to Nominal Gain)	-0.4 dB -2.2 dB	0.1 dB -0.9 dB	-0.6 dB -2.4 dB	Pass See Plot	
4	Gain Flatness: <sup>1</sup>	±1.5 dB (Relative to Nominal Gain)	±0.9 dB	±0.5 dB	±0.9 dB	Pass See Plot	
5	Noise Figure: <sup>2</sup>	5.0 dB Max.	3.8 dB	4.5 dB	5 dB	Pass See Plot	
6	OP1dB: <sup>2</sup>	+21 dBm Min. +25 dBm Goal	23.7 dBm	22.1 dBm	21.9 dBm	Pass See Plot	
7	OIP2: <sup>3</sup>	+37 dBm Min.		37.1 dBm		Pass See Table	
8	OIP3: <sup>3</sup>	+30 dBm Min.		31.6 dBm		Pass See Table	
9	Input VSWR: <sup>1</sup>	2.0:1 Max.		1.3:1		Pass See Plot	
10	Output VSWR: <sup>1</sup>	2.0:1 Max. (2.0 to 15.0 GHz)	1.7:1	Pass See Plot			
		2.8:1 Max. (15.0 to 18.0 GHz)	2.5:1	Pass See Plot			
11	DC Supply:	+11 to +12.5 VDC @ 400 mA Goal, 450 mA Max.	367 mA	392 mA	409 mA	Pass	

<sup>1</sup> Gain and Gain Flatness shall be measured with 100 MHz steps (201 Points Minimum)

<sup>2</sup> Noise Figure and OP1dB shall be measured with 1 GHz steps

<sup>3</sup> OIP2 and OIP3 shall be measured with 2 GHz steps

Capture all S-parameters (S11, S22, S12, S21) over all the specified frequencies and temperatures & round to one decimal digit on summary table above.

QA/QC Approval: \_\_\_\_\_

Date: \_\_\_\_\_



4/9/18

7311-F Grove Road, Frederick, MD 21704 USA  
 Phone: (301) 662-1731  
 Email: sales@pmi-rf.com



**SUMMARY TEST DATA  
ON  
PE2-26-2G18G-5-21-12-SFF-DP**

PL22343/1812

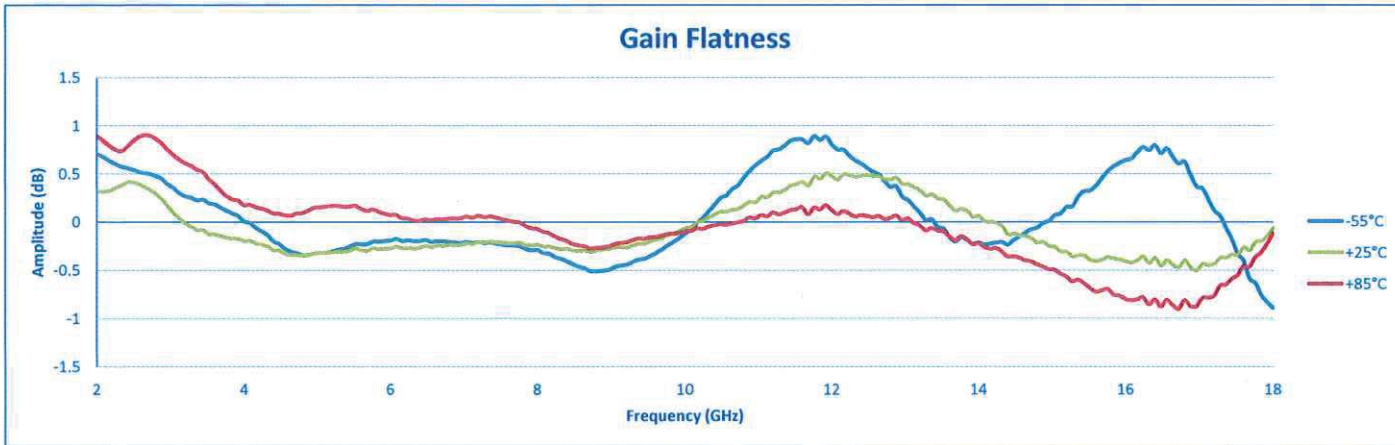
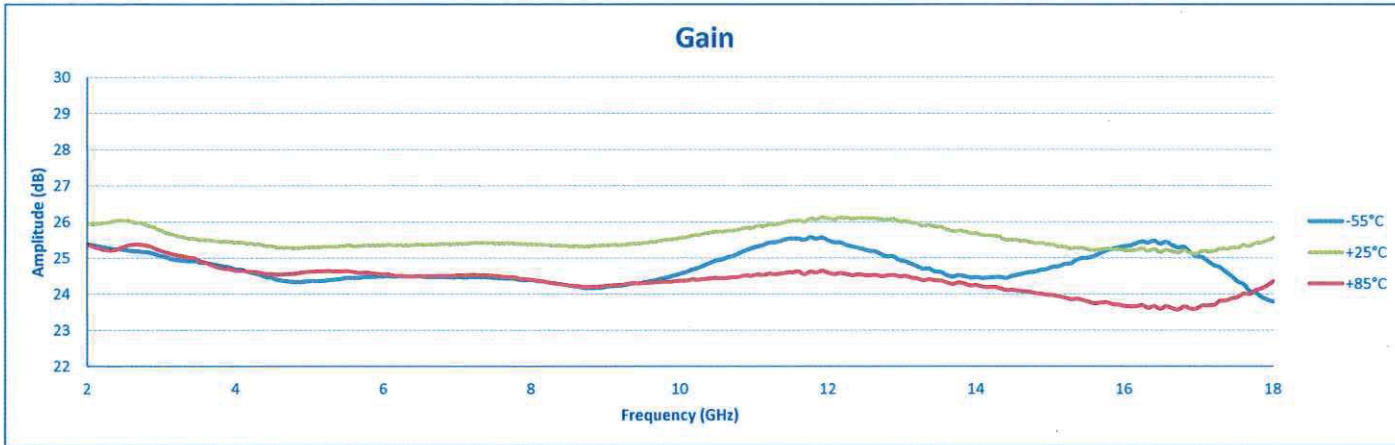


7311-F Grove Road, Frederick, MD 21704 USA  
Phone: (301) 662-1731  
Email: sales@pml-rf.com



**SUMMARY TEST DATA**  
ON  
**PE2-26-2G18G-5-21-12-SFF-DP**

PL22343/1812

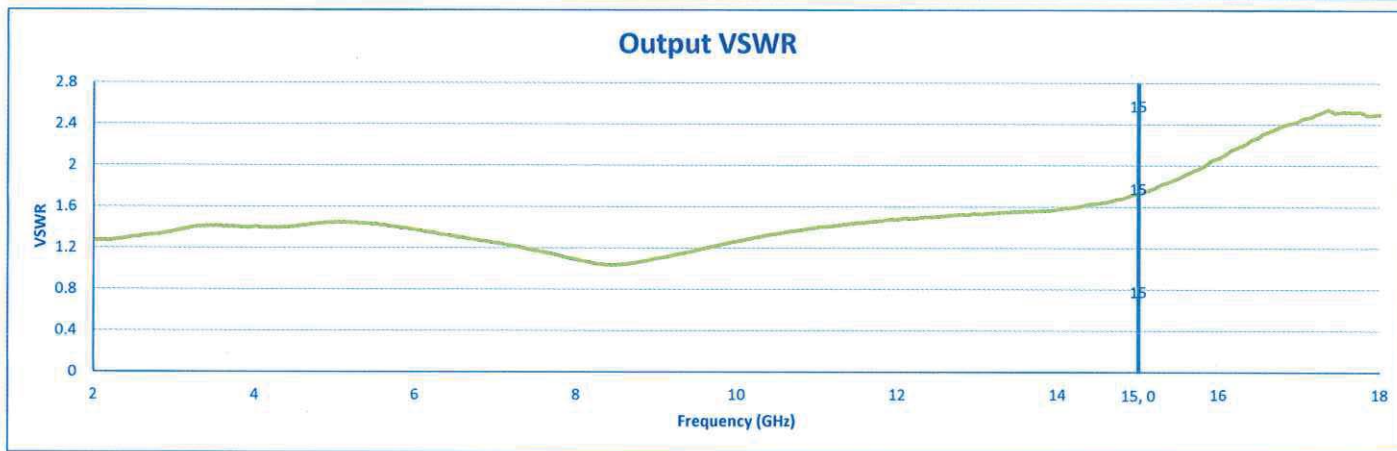
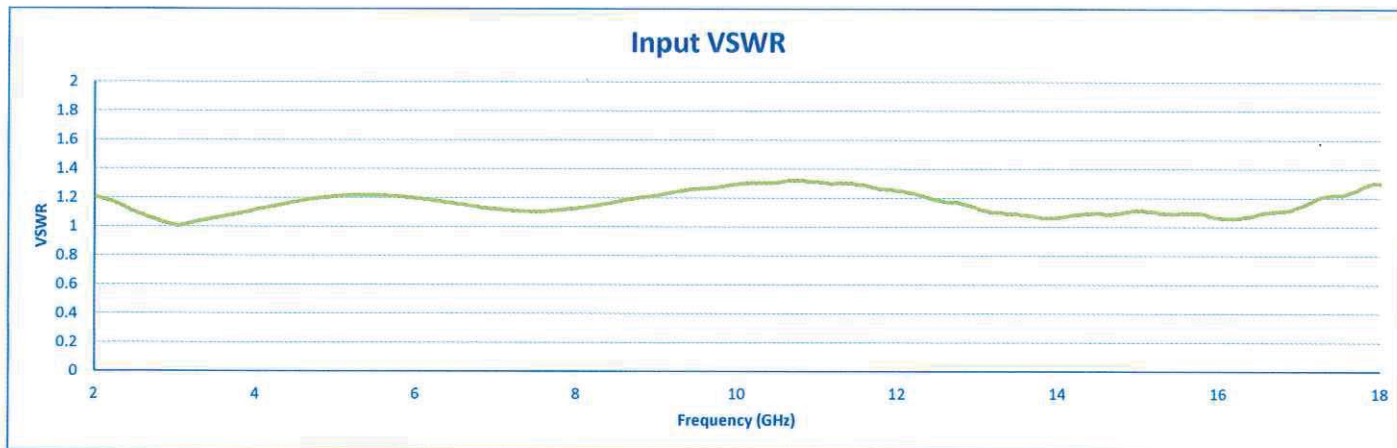


7311-F Grove Road, Frederick, MD 21704 USA  
Phone: (301) 662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)



**SUMMARY TEST DATA  
ON  
PE2-26-2G18G-5-21-12-SFF-DP**

PL22343/1812

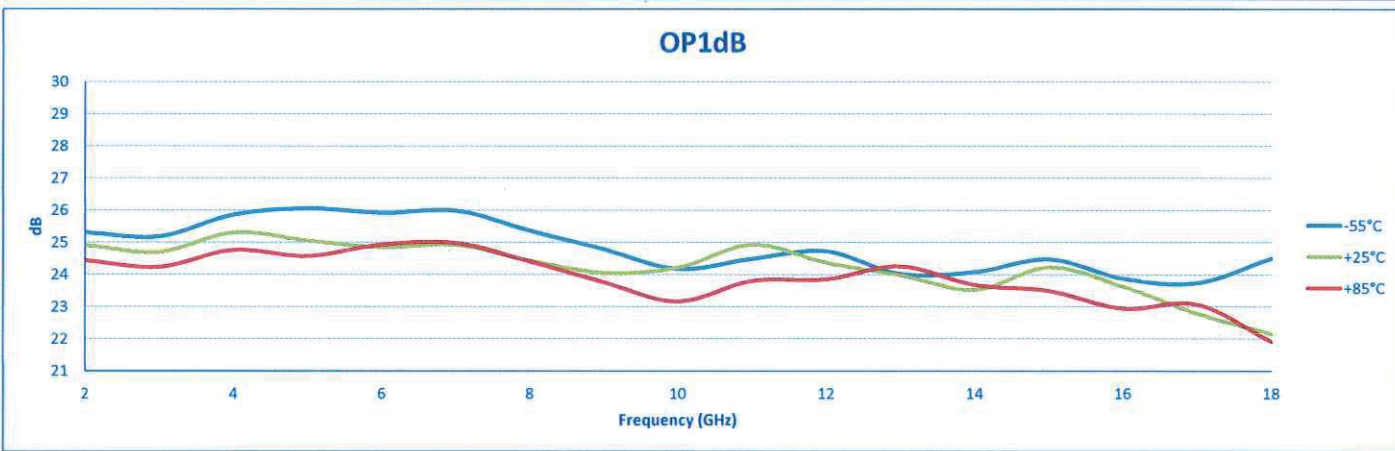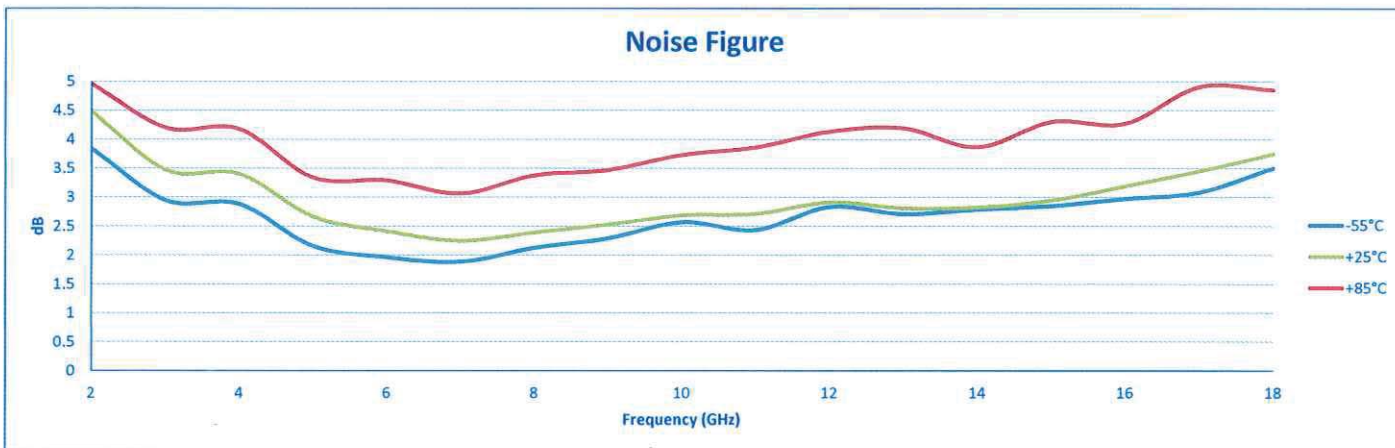

7311-F Grove Road, Frederick, MD 21704 USA  
Phone: (301) 662-1731  
Email: sales@pmi-rf.com



**SUMMARY TEST DATA  
ON  
PE2-26-2G18G-5-21-12-SFF-DP**

PL22343/1812

<u>Freq</u> <u>(GHz)</u>	<u>IP3</u> <u>(dBm)</u>	<u>IP2</u> <u>(dBm)</u>
2	34.8	37.1
4	34.8	40.2
6	34.8	39.8
8	32.4	37.2
10	32.5	44.3
12	33.3	49.9
14	31.6	47.6
16	32.4	41.9
18	31.9	44.3

7311-F Grove Road, Frederick, MD 21704 USA  
Phone: (301) 662-1731  
Email: sales@pmi-rf.com