



**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

PL23010/1827

Customer: _____	Tested By: <u>H. Gonzales</u>	
SO No: _____	Temperature: <u>+25°C</u>	
Model No: <u>P1T-18G40G-90-1515-292FF</u>	Date: <u>07/10/18</u>	
Serial No: <u>PL23010/1827</u>	Drawing No: <u>27612231</u>	Rev: <u>A1</u>

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	18 GHz – 40 GHz	18 GHz – 40 GHz	PMI QA 2
2	Insertion Loss:	5.0 dB Max	4.80dB See Plot	
3	Isolation:	90 dB Min.	92.50dB See Plot	
4	VSWR: (IN/OUT)	1.5:1 Goal. 2.0:1 Max.	Input 1.94:1 Output 1.73:1 See Plot	
5	Switching Speed: (10% to 90% RF)	15 ns Goal. 25 ns Max.	See Typical Characteristics	
6	Input Power:	+23 dBm CW Max.	Pass	
7	DC Supply:	+15VDC @ 100 mA -15VDC @ 100 mA	+15 VDC @ 50mA -15 VDC @ 39mA	
8	Control Signal:	0 VDC J1 - J2 (On) +5VDC J1 - J2 (Off)	Pass	PMI QA 2

QA/QC Approval: *G. Leland* PMI
QA 2 Date: 7/11/18


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

PL23010/1827

Insertion Loss and Return Loss

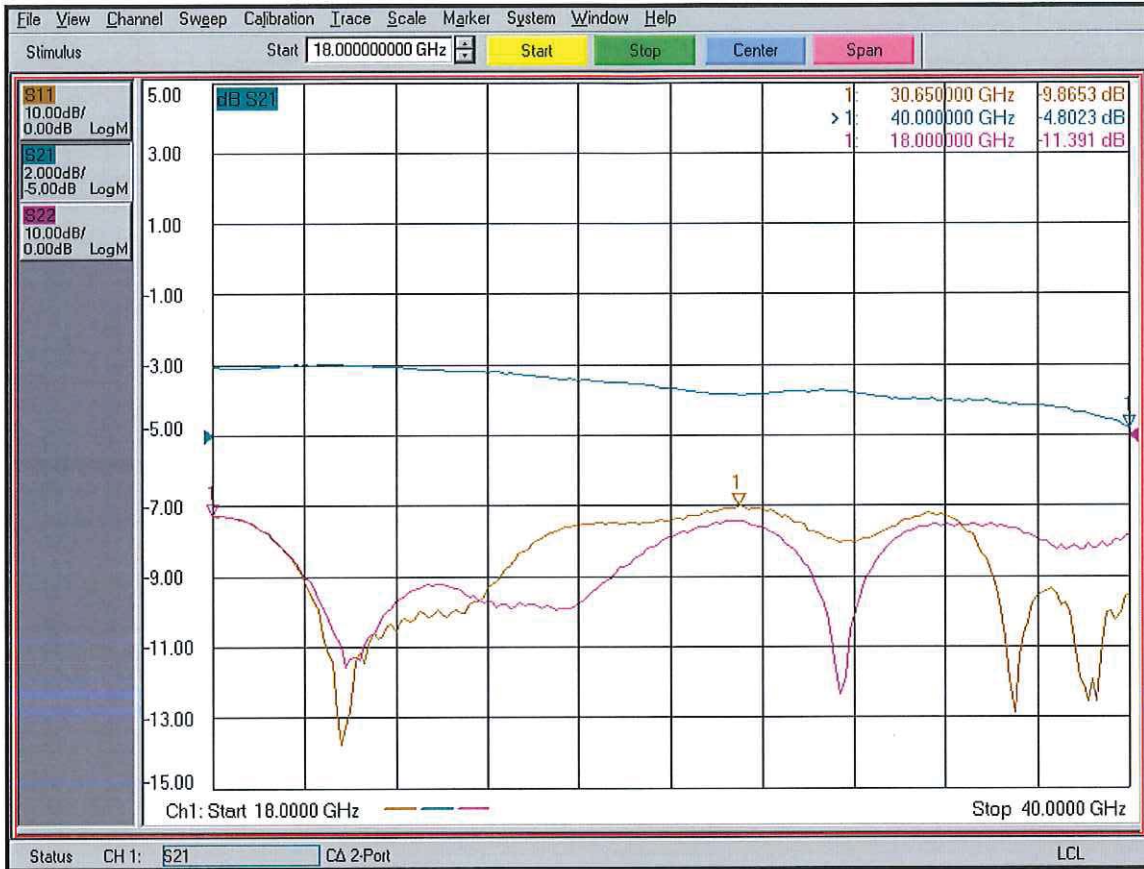



**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

PL23010/1827

Isolation

