



**SUMMARY TEST DATA
ON
P1T-6G12G-80-T-SFF-1W**

PL23653/1840

Customer: _____ Tested By: A. Lopez
SO No: _____ Temperature: +25°C
Model No: P1T-6G12G-80-T-SFF-1W Date: 10/05/18
Serial No: PL23653/1840 Drawing No: 26933390 Rev: A2

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	6.0 to 12.0 GHz	6.0 to 12.0 GHz	PMI QA 1	
2	Insertion Loss:	1.75dB Max	1.63dB (See Plot)		
3	Isolation:	80dB Min	86.90dB (See Plot)		
4	VSWR:	2.0:1 Max (1.5:1 Goal)	Input: 1.45:1 Output: 1.47:1 (See Plot)		
5	Switching Speed:	25ns Typ	Pass (See Typical Characteristics)		
6	Operating Power:	+30dBm Max	Pass (See Typical Characteristics)		
7	Control	TTL Logic "0" = Insertion Loss "1" = Isolation	Pass		
8	Power Supply:	+5VDC @ 50mA Max -15VDC @ 75mA Max	40mA 70mA		PMI QA 1


QA/QC Approval:  **PMI QA 1** Date: 10/5/18



**SUMMARY TEST DATA
ON
P1T-6G12G-80-T-SFF-1W**

PL23653/1840

Insertion Loss – Return Loss

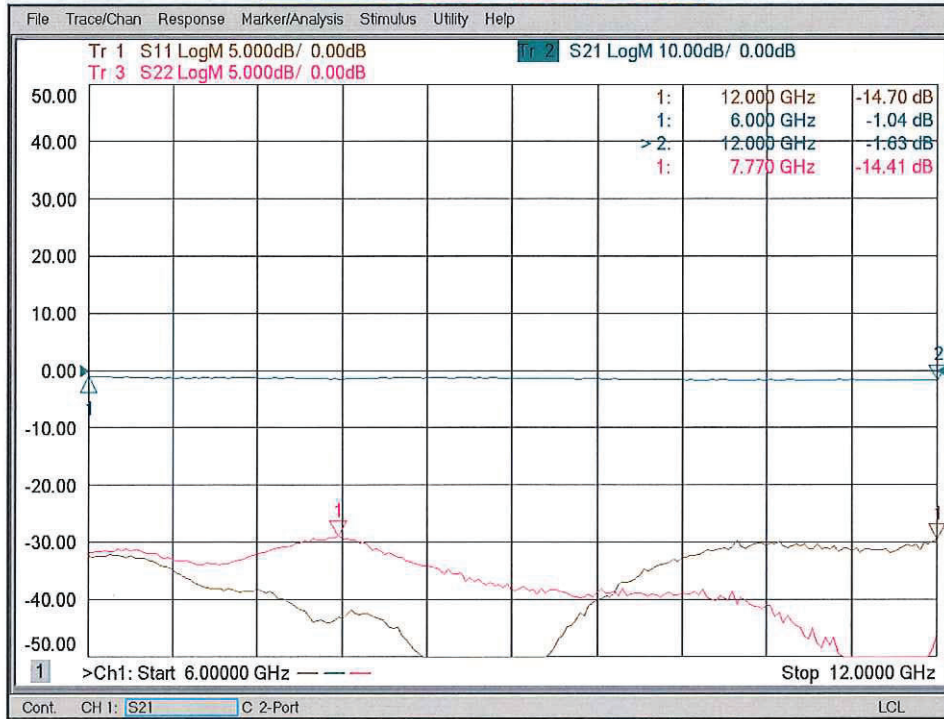

Isolation & Return Loss

